

Measurement of prompt and non-prompt J/ψ in pPb collisions at $\sqrt{S_{NN}} = 5.02$ TeV



**Songkyo Lee, Lamia Benhabib,
Yongsun Kim, Kisoo Lee**




lab meeting
18th July 2014

Double differential cross section


- LHCb points plotted at the center of the bin
- Our points plotted at $\langle p_T \rangle$

$$\frac{d^2\sigma}{dp_T dy} = \frac{N_{fit}^{J/\psi} / (A \cdot \epsilon)}{L_{int} \times B(J/\psi \rightarrow \mu^+ \mu^-) \times \Delta p_T \Delta y}$$

[Prompt]

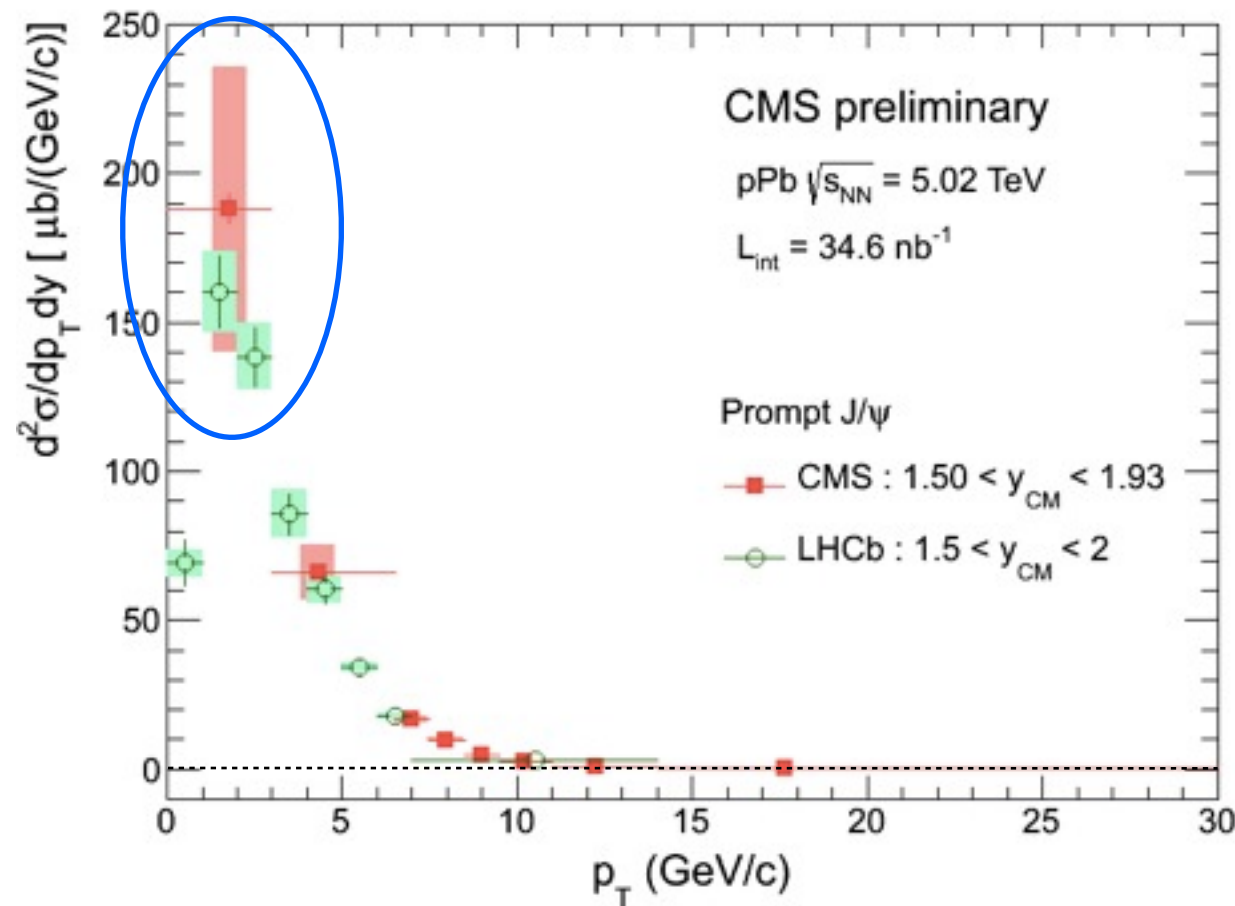

[Non-prompt]

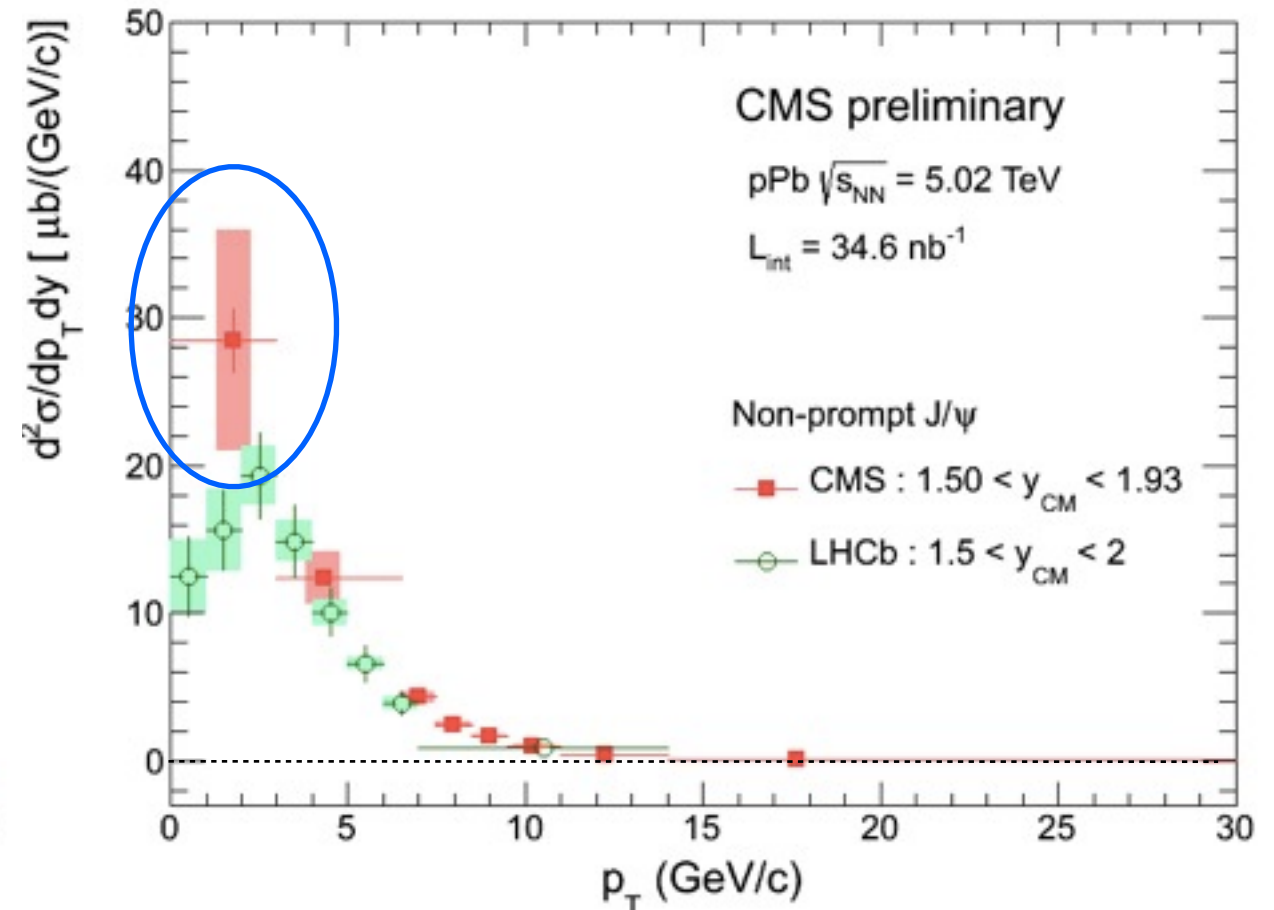

- Large discrepancies at lower $p_T < 3 \text{ GeV/c}$
- acceptance or efficiency underestimated?

Definition of acceptance and efficiency

- Acceptance** : 1) a sample produced with the same configuration setting as the official, but MuMuGen Filter (kinematic filter for single muons) were removed.

$$\alpha = \frac{N_{reconstructible, M1}^{dimuon}(p_T, y)}{N_{generated}^{dimuon}(p_T, y)}$$

← **Acc. numerator(GEN)**
M1 + acc.cut

- Efficiency** : 2) centrally produced official sample (with MuMuGen Filter).

$$\varepsilon = \frac{N_{detectable}^{dimuons\ reconstructed, M2, muIDcut, triggerselection}(p_T, y)}{N_{detectable}^{dimuon\ generated, M1}(p_T, y)}$$

← **Eff. denominator(GEN)**
M1 + acc.cut + filter

● M1

$$2.6 < m_{\mu\mu} < 3.5 \text{ GeV}/c^2$$

● acceptance cut

(detectable/reconstructable)

$$-2.4 < \eta < 1.93$$

$$|\eta^\mu| < 1.3 \rightarrow p_T^\mu > 3.3 \text{ GeV}/c$$

$$1.3 < |\eta^\mu| < 2.2 \rightarrow p_T^\mu > 2.9 \text{ GeV}/c$$

$$2.2 < |\eta^\mu| < 2.4 \rightarrow p_T^\mu > 0.8 \text{ GeV}/c$$

● MuMuGen filter

$$1) -2.5 < \eta^\mu < 2.5$$

$$2) p_T^\mu > 2.5$$

(configuration in backup)

- MuMuGen Filter should be looser than the acceptance cut, and “denominator of efficiency” should be same with “numerator of acceptance”.**

Ⓜ **Example : How filter becomes tighter than acceptance cut**

$$|p| = p_T \cdot \cosh(\eta)$$

■ **Before boosting**

Let's assume a single muon with

$$\eta_{\text{before}} = 1.73$$

$$p_{\text{before}} = 2.5 \text{ GeV}/c \text{ (limit of the filter cut)}$$

$$\rightarrow p_T = 0.859 \text{ GeV}/c$$

■ **After boosting**

$$\eta_{\text{after}} = \eta_{\text{before}} + \Delta\eta = 1.73 + 0.47 = 2.2$$

$$p_T = 0.859 \text{ GeV}/c \text{ (invariant)}$$

$$p_{\text{after}} = 3.65 \text{ GeV}/c$$



In this η range, acceptance cut is $2.2 < |\eta^\mu| < 2.4 \rightarrow p_T^\mu > 0.8 \text{ GeV}/c$.

So this muon should be accepted,
But already rejected by filter before boosting!!



■ **This problem is only for pPb analysis where pseudo-rapidity shifts.**

pp boosted prompt J/psi sample

- Old official sample (~2M)

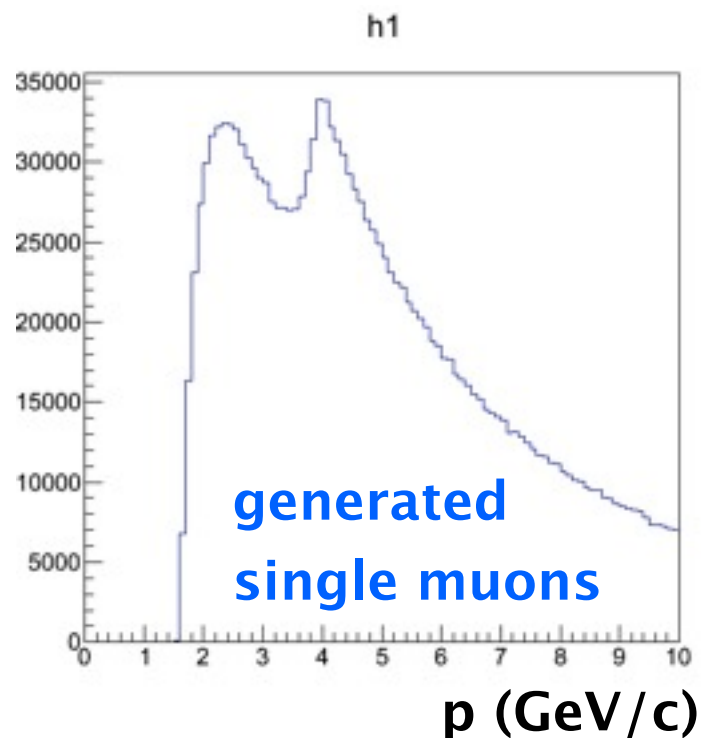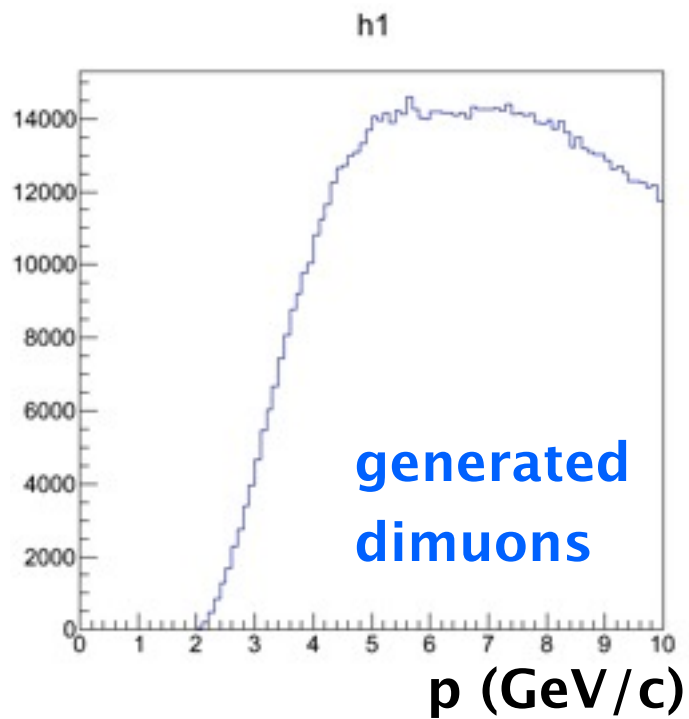


- New sample with correct filter (~1M)

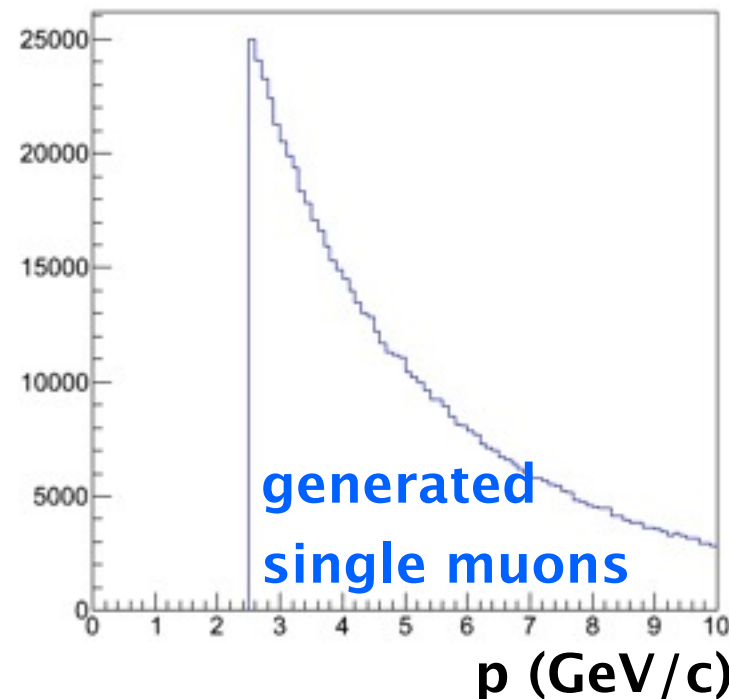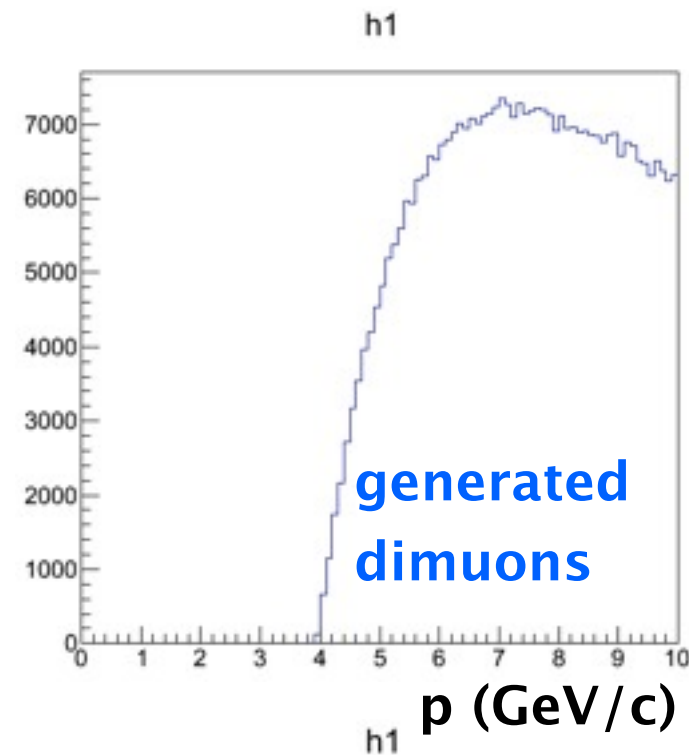


- Filter is applied properly
- Details are on back-up

Dimuons : p_T distributions



Old official sample (~2M)

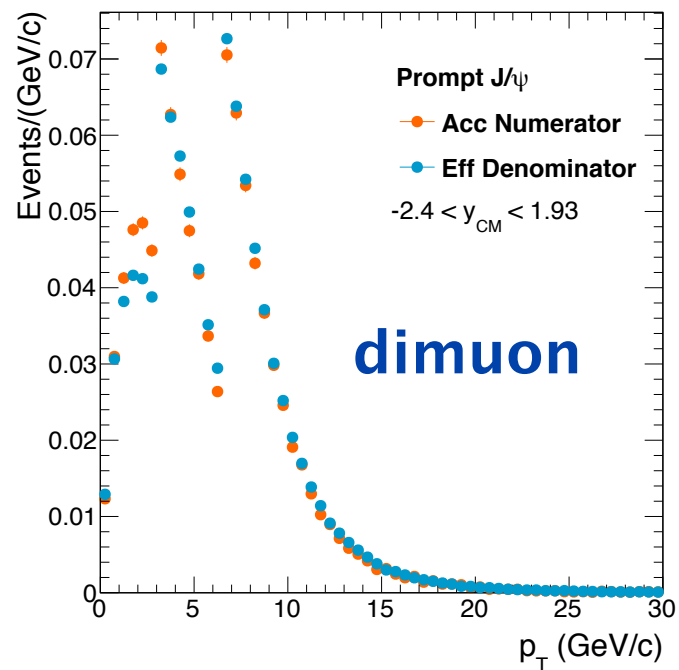

[Ratio]

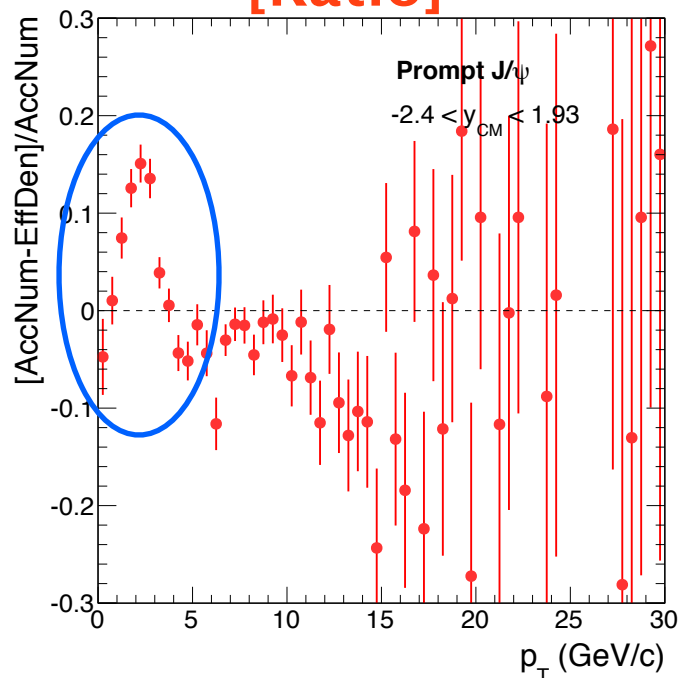


New sample with correct filter (~1M)

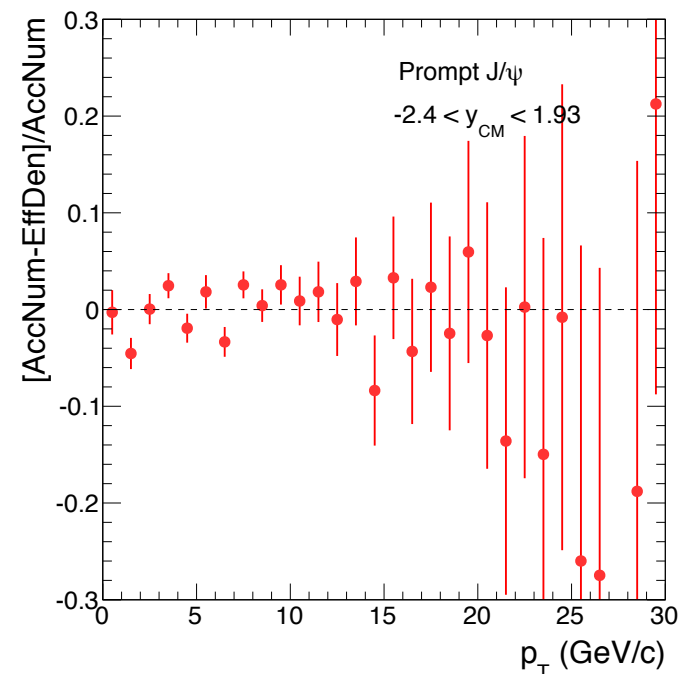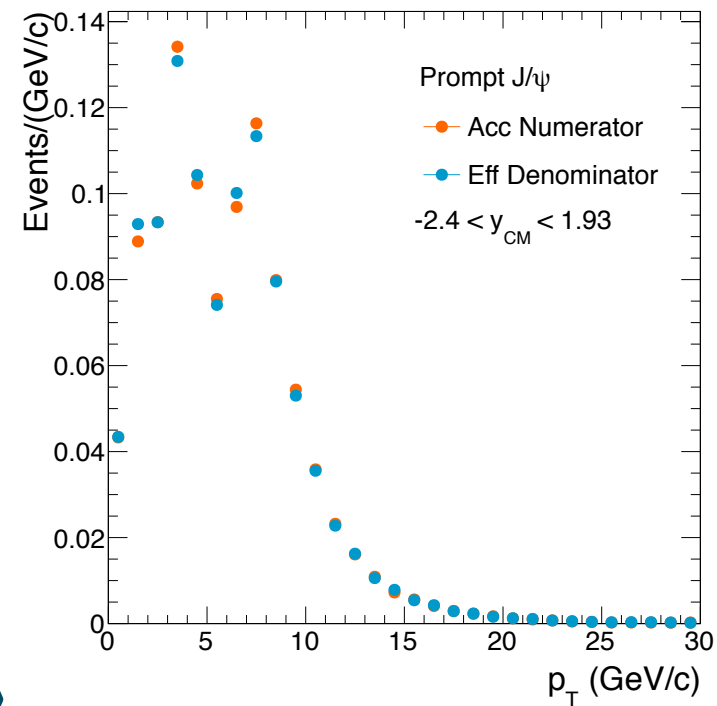




- Discrepancies removed
- Details are on back-up

Dimuons : y_{lab} distributions

Old official sample (~2M)

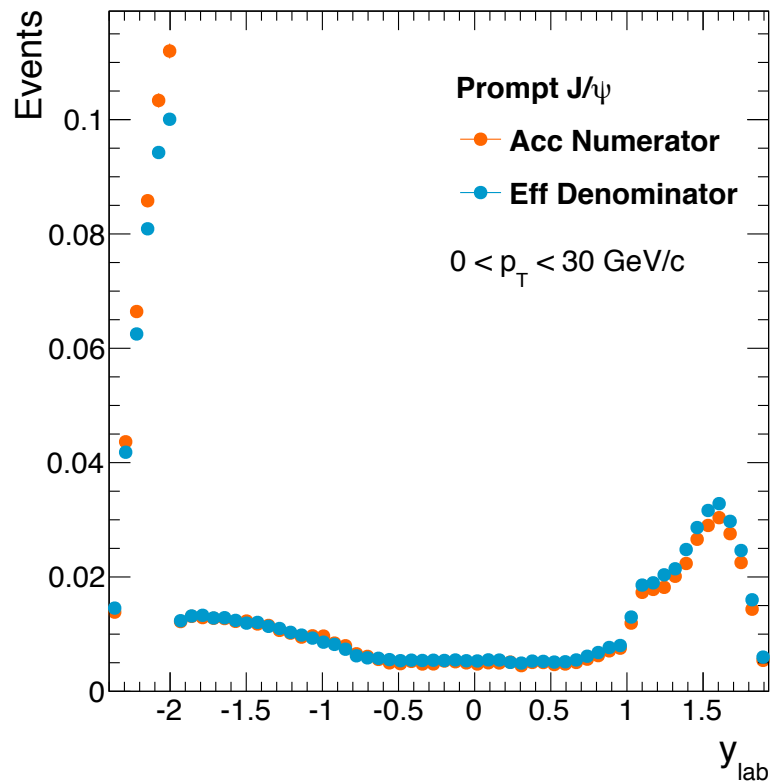



New sample with correct filter (~1M)

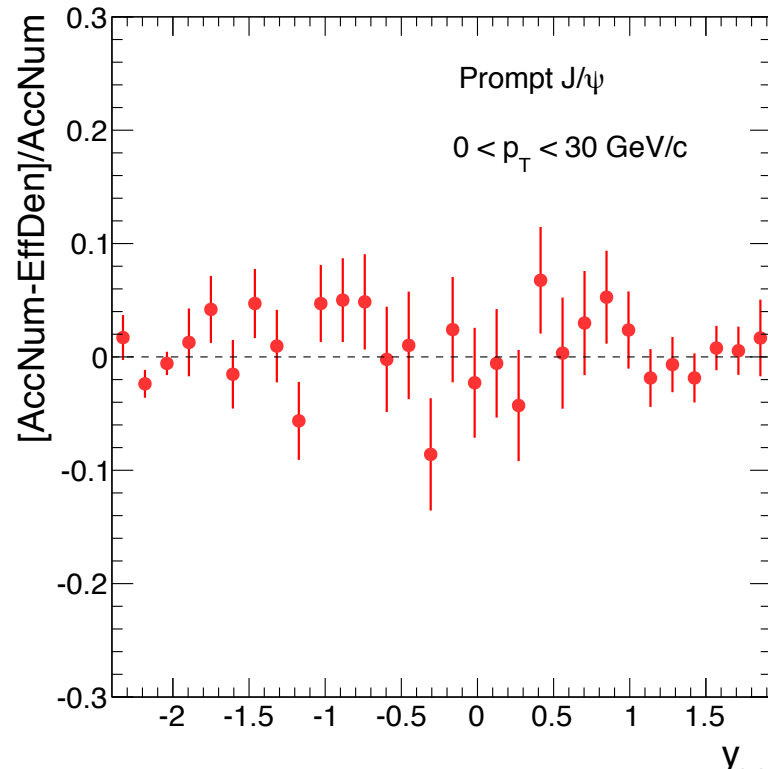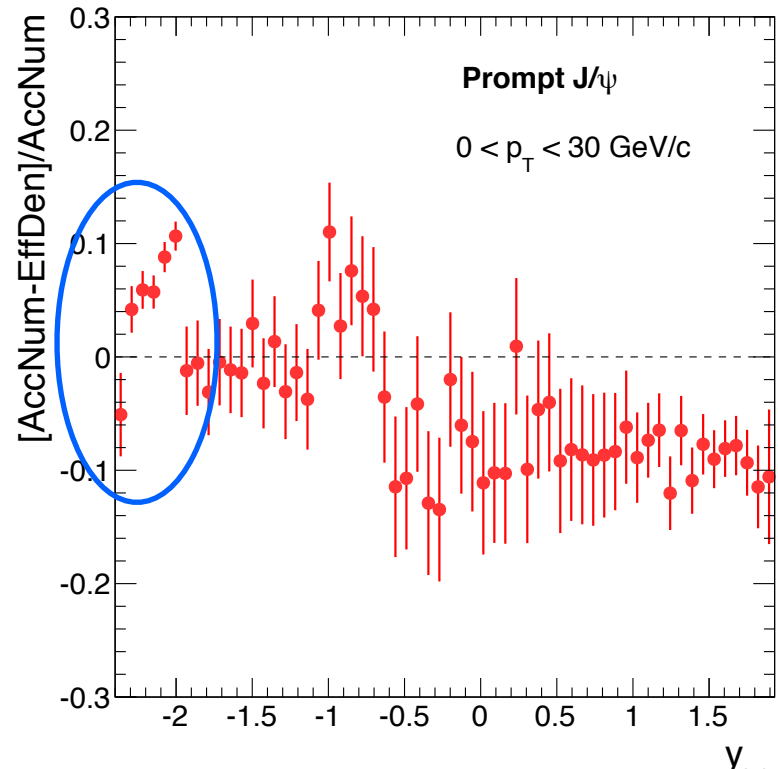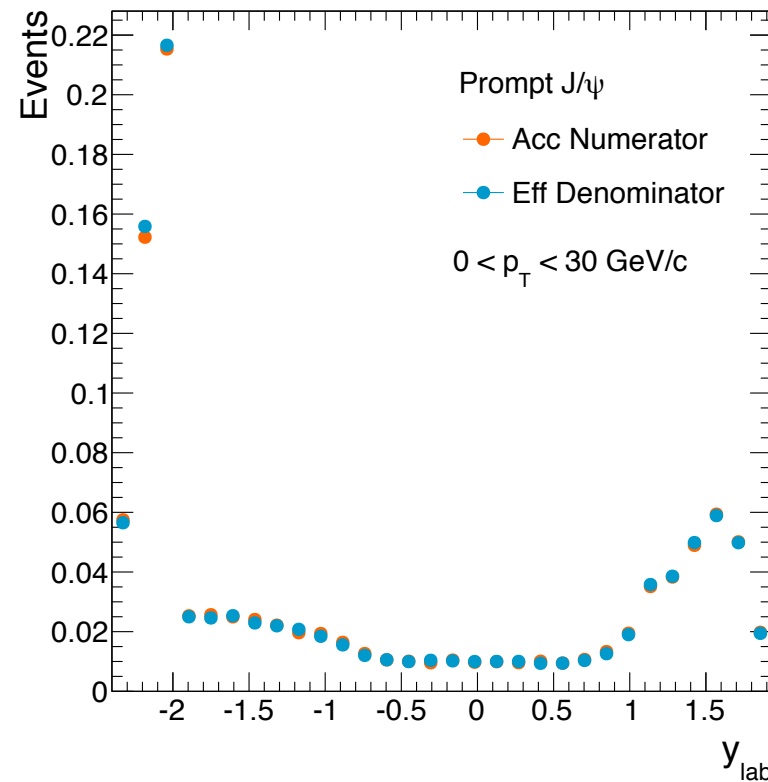



- Discrepancies removed
- Details are on back-up

Single muons : p_T distributions

- Old official sample (~2M)

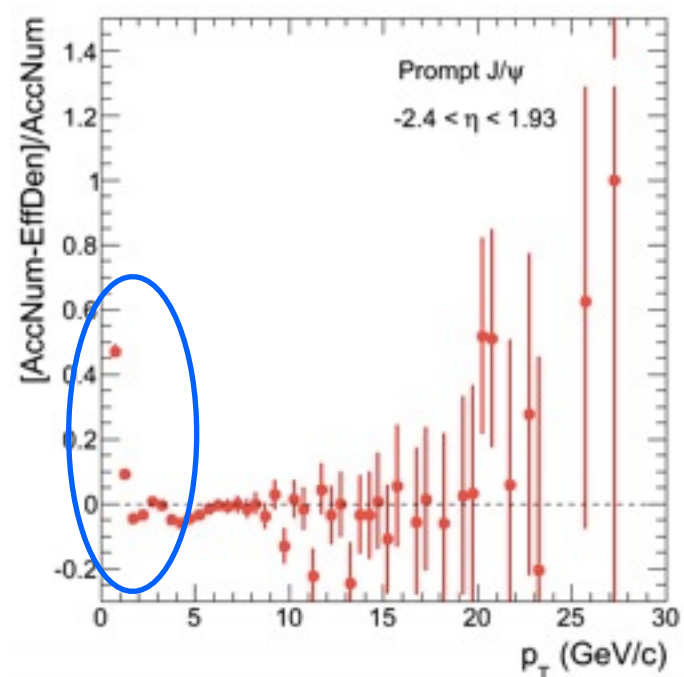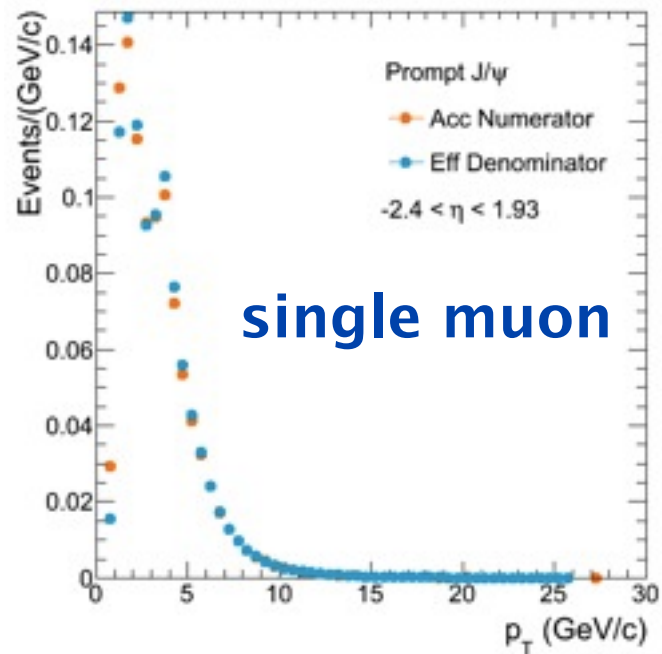



- New sample with correct filter (~1M)

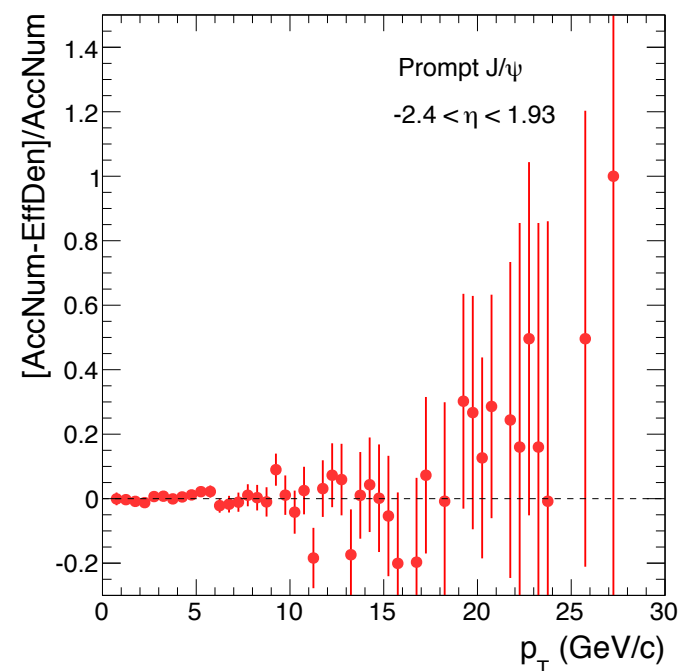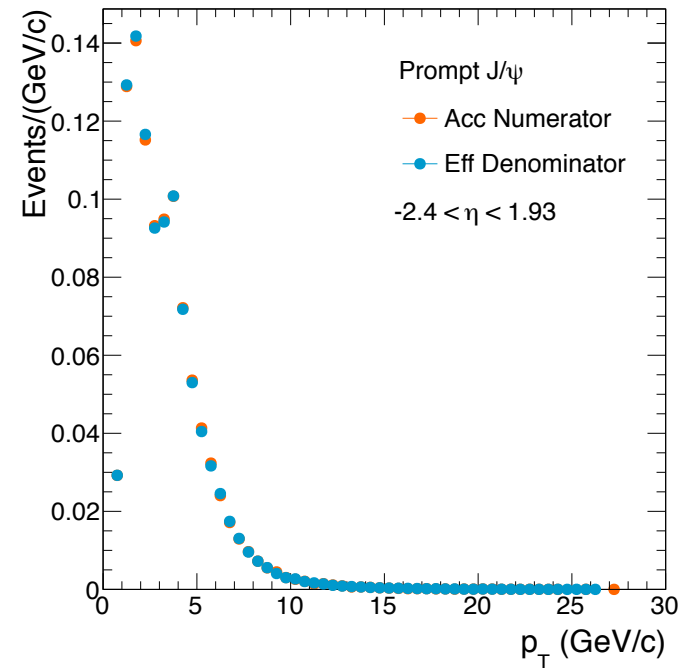



- Discrepancies removed
- Details are on back-up

Single muons' : η_{lab} distributions

Old official sample (~2M)

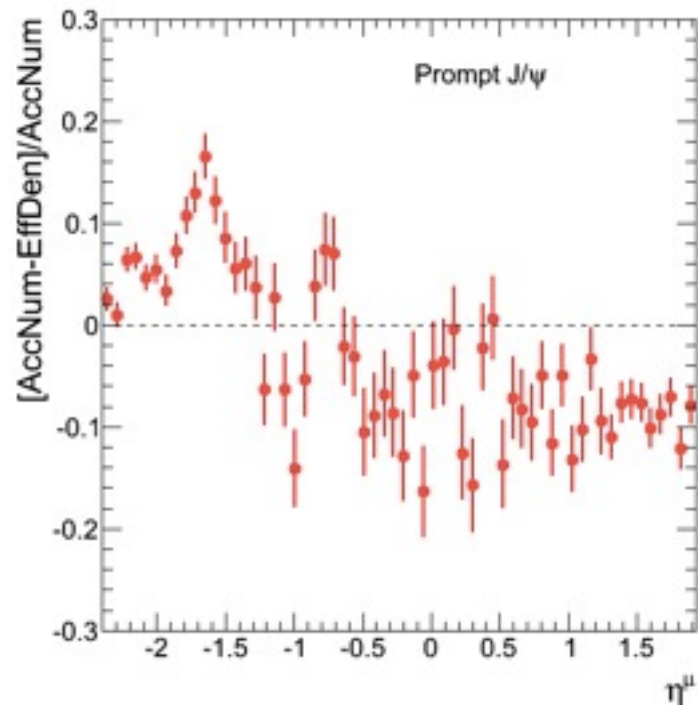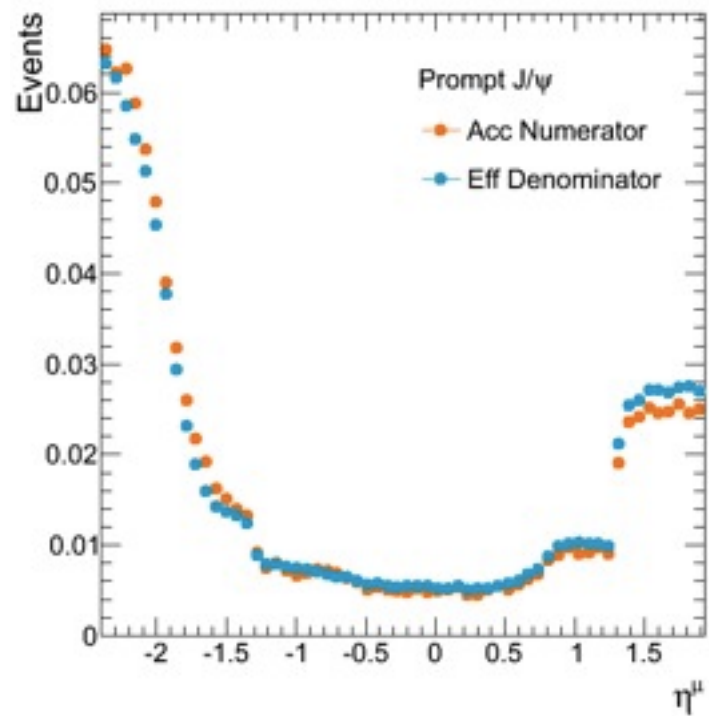

New sample with correct filter (~1M)

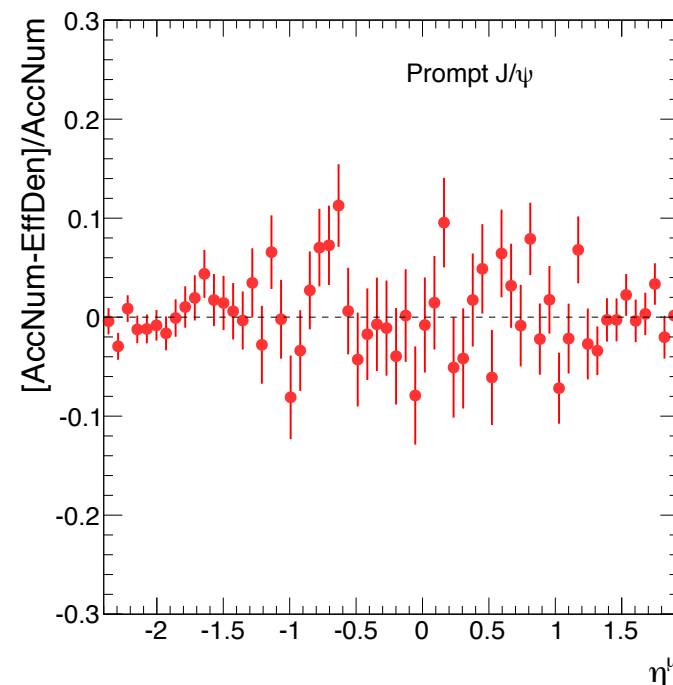
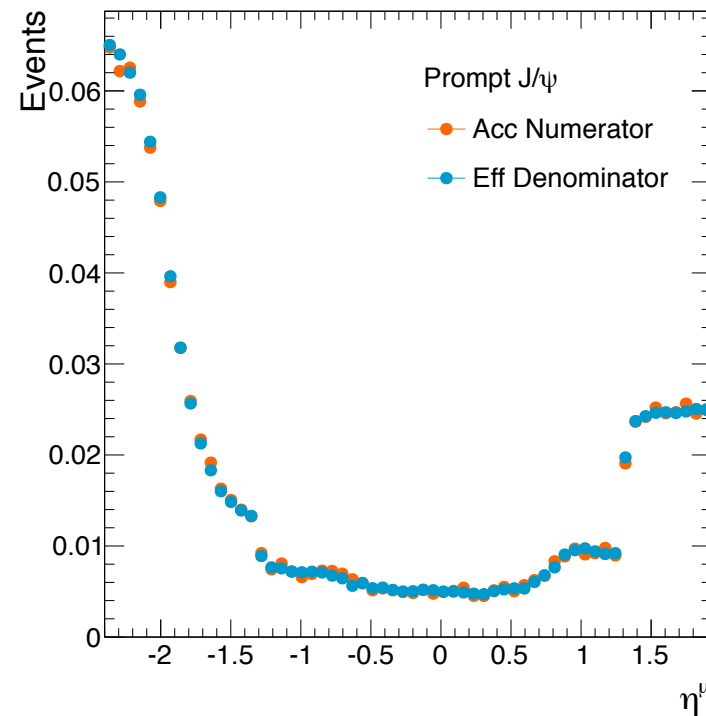


- Discrepancies removed
- Details are on back-up

Efficiency values

Old official sample (~2M)


New sample with correct filter (~1M)

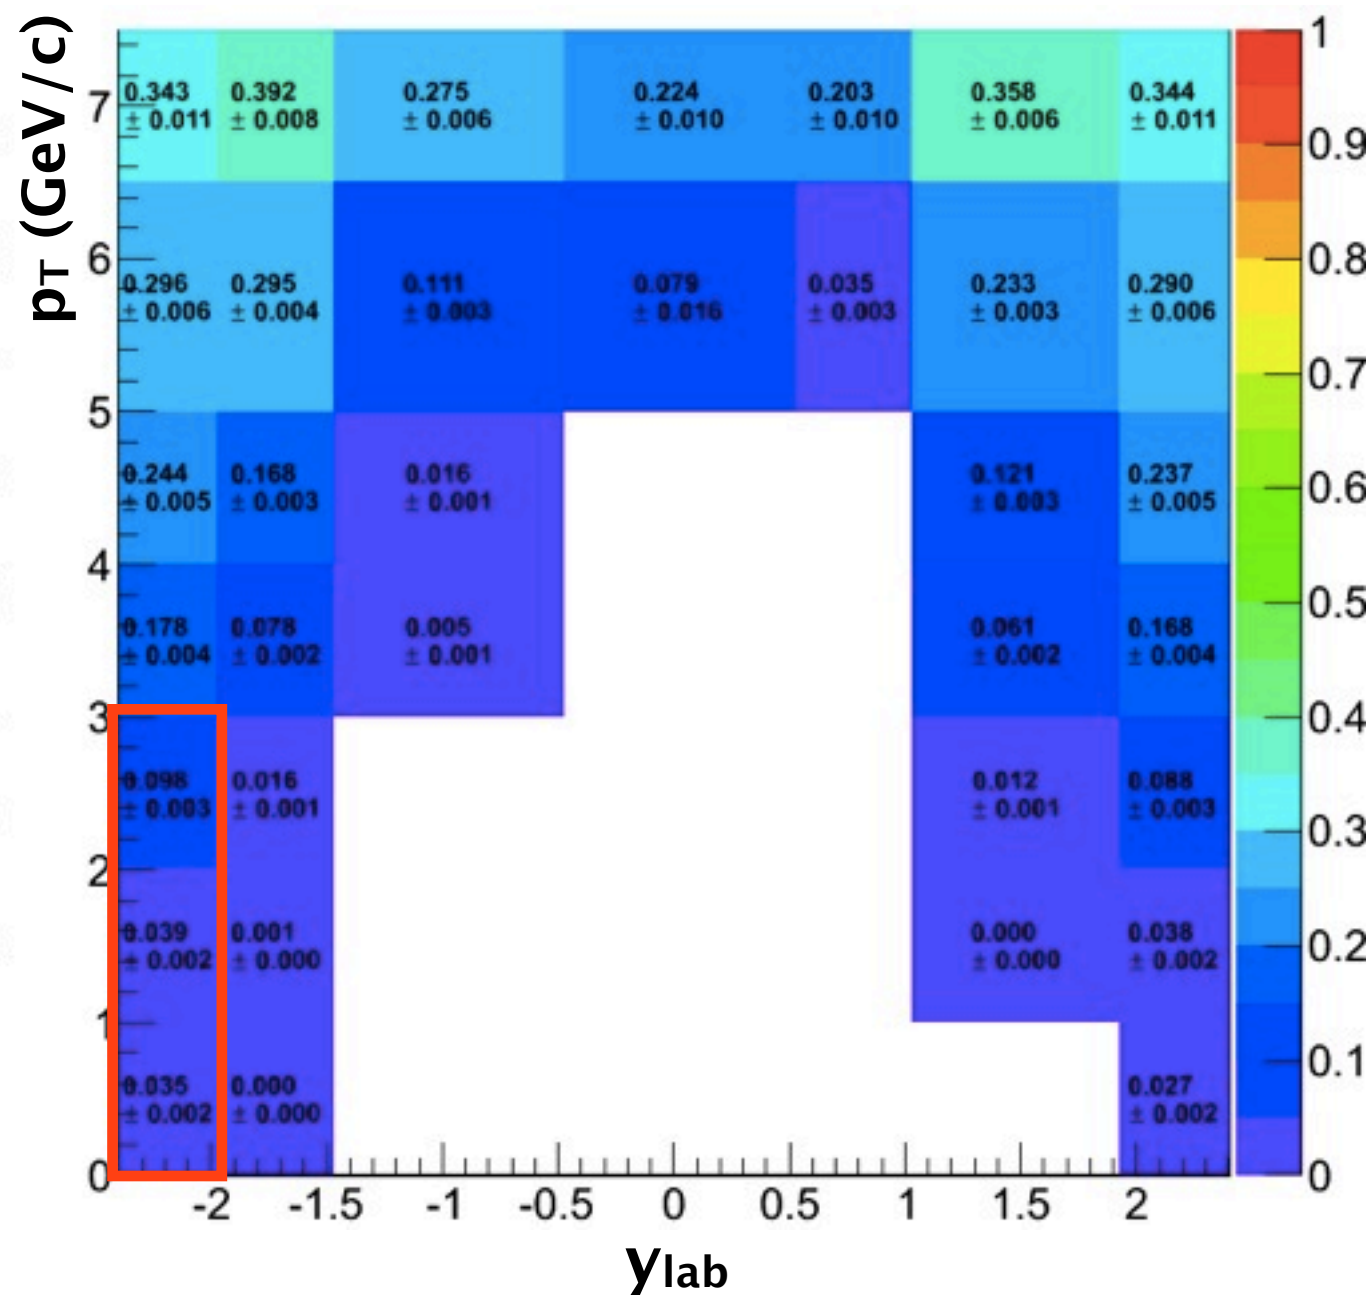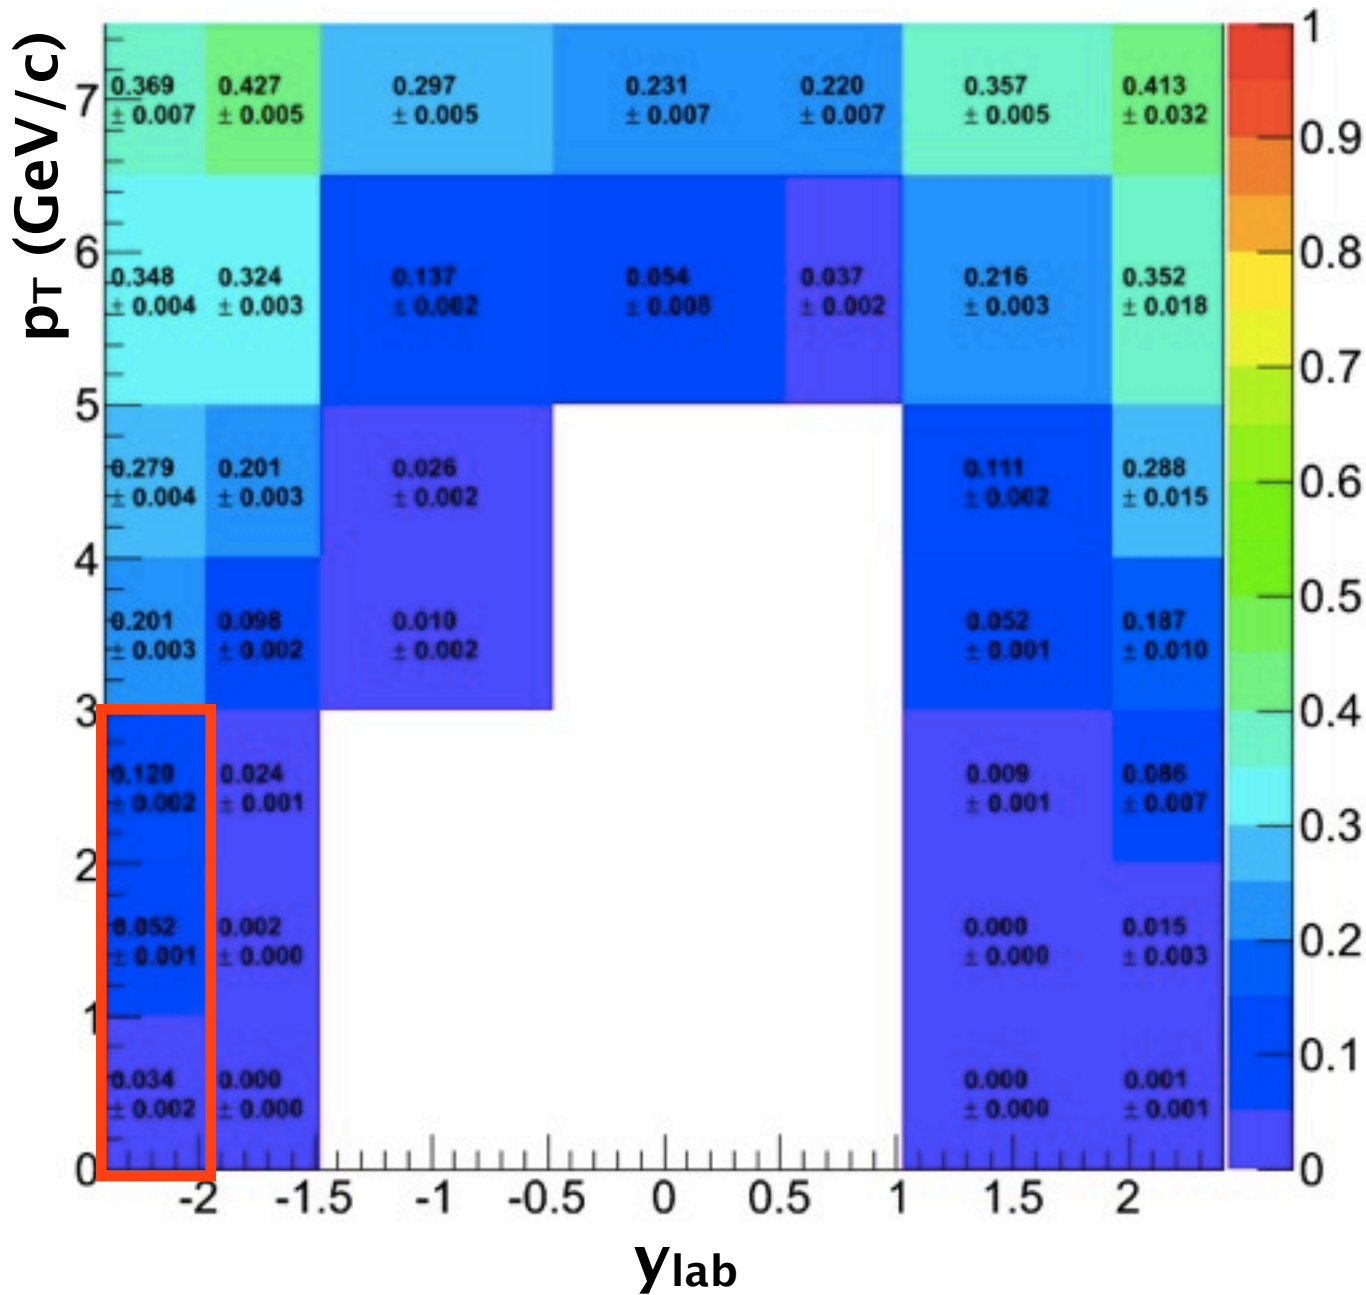




Back up

- ① **single muon momentum distributions (not p_T)**
 - Produce small sample with and without MuMuGen Filter

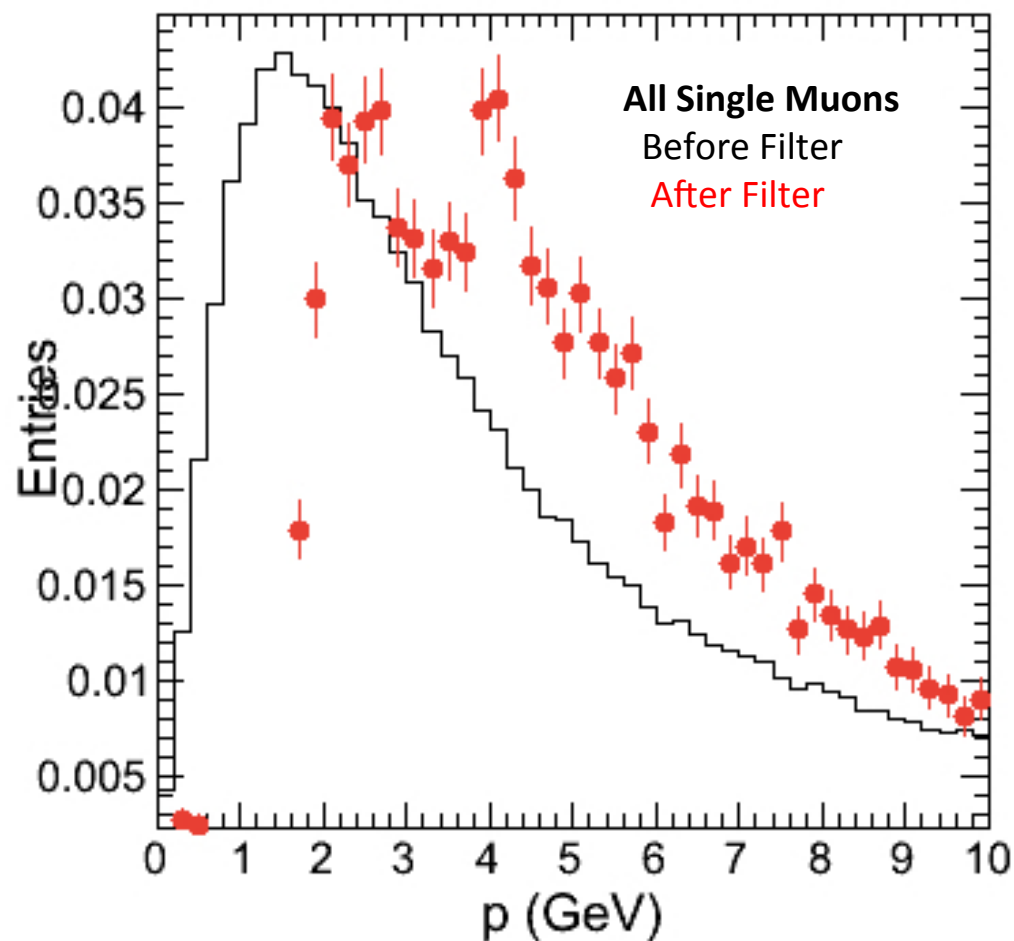

→
acceptance cut

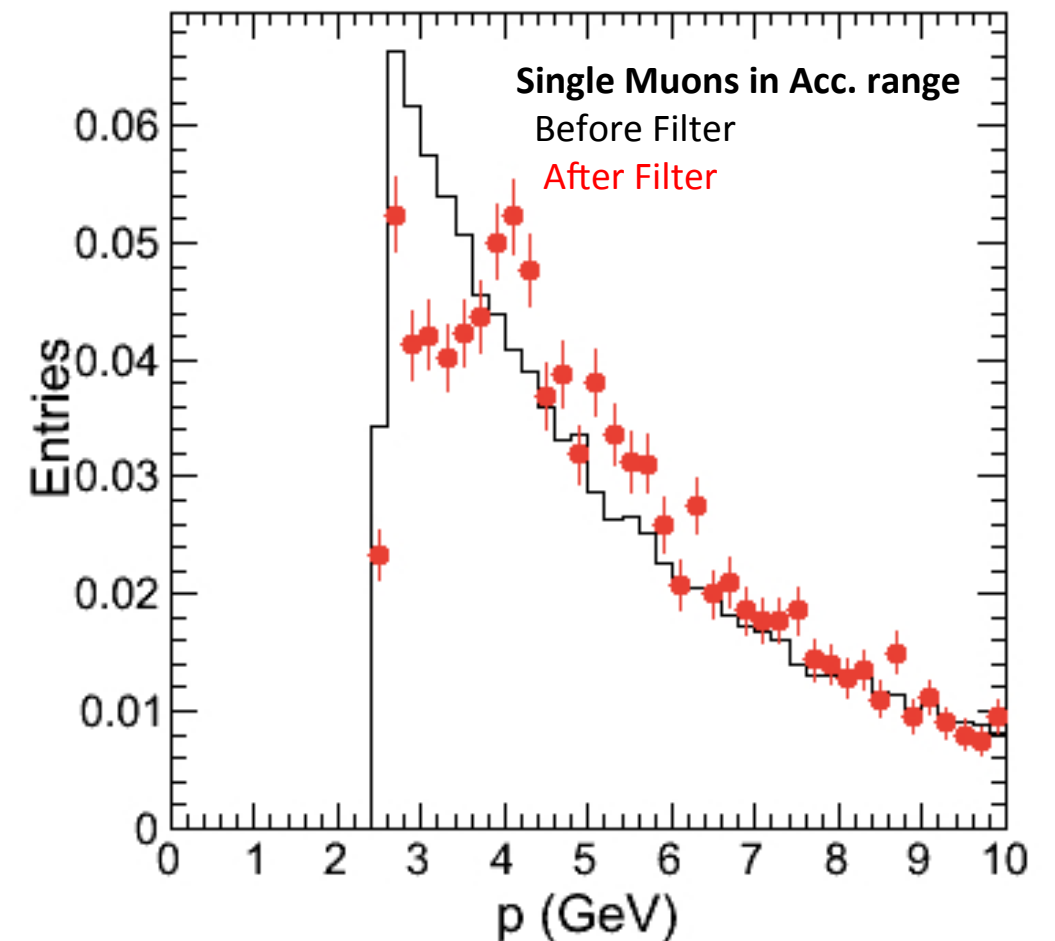

They don't agree!

- ① **Acceptable dimuon pairs can be lost by MuMuGen Filter (Boost order sequence)**
 - filter cuts affects muons up to $p \sim 4$ GeV/c : detailed calculation on backup

Option 1 : change the order of Filter and Boost

Current : generator*filter precedes all sequence



for path in process.paths:

```
getattr(process,path)._seq = process.ProductionFilterSequence*getattr(process,path)._seq
```

After Fix : vtxSmearred located just before filter

```
process.ProductionFilterSequence =
```

```
cms.Sequence(process.generator*process.VtxSmearred*process.oniafilter*process.mumugenfilter)
```

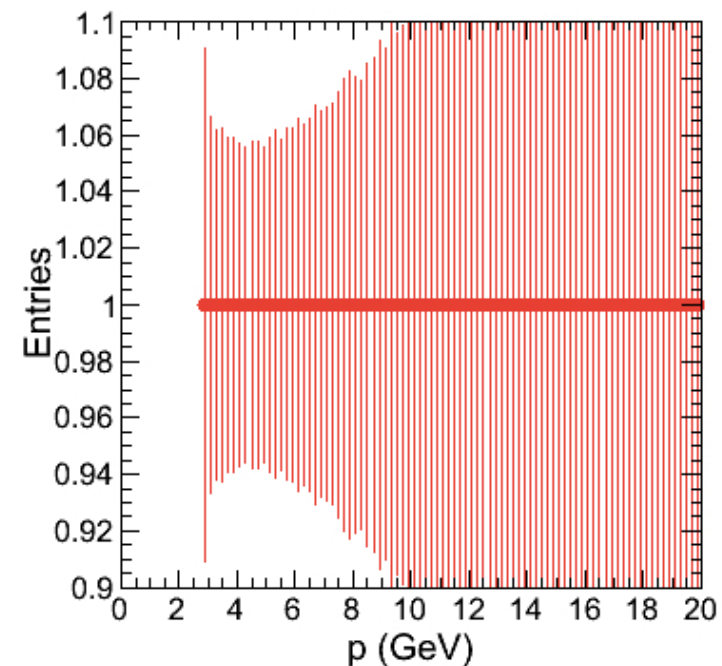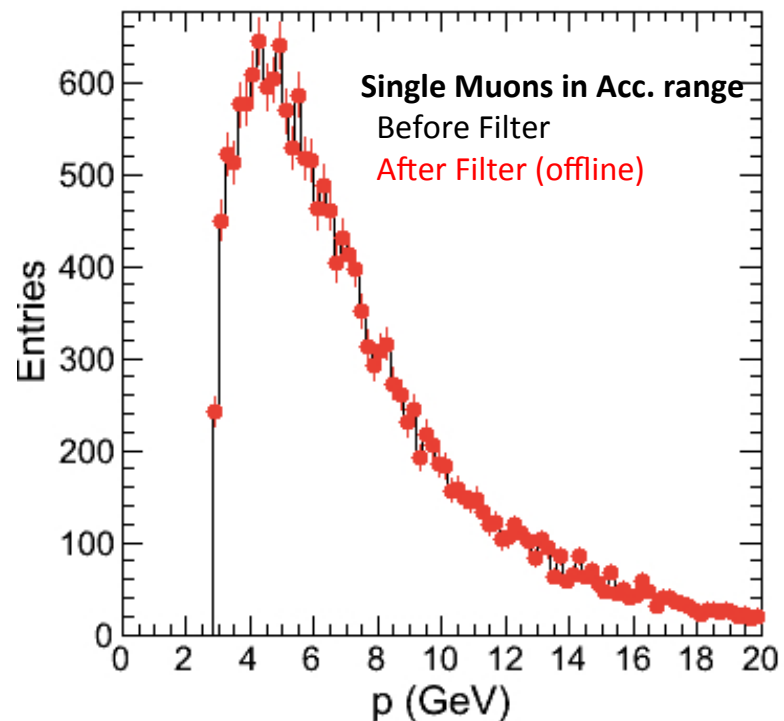

They agree




Option 2 : Loose filter thresholds so all acceptable muons can pass

- $p_T > 0.8$ GeV
- $p > 1.5$ GeV
- $|\eta| < 3.0$




- Request New MC samples
 - Configuration fragments (cfi) will be ready soon to be used for cmsDriver command
- PYTHIA + HIJING embedding (8M in total)

 - Prompt J/psi + Minbias HIJING (2M in pPb, 2M in Pbp)
 - Non-prompt J/psi + MinBias HIJING (2M in pPB, 2M in Pbp)
- Fitting study
 - No serious problem in the current fitting method, but we would like to study further and improve the quality. (next slides)
 - extend the rapidity range from to $-2.4 < y_{\text{lab}} < 1.93$ to $-2.87 < y_{\text{CM}} < 1.93$
- TNP result validation
 - should be done with new MC sample
 - Cross check every step




Reco

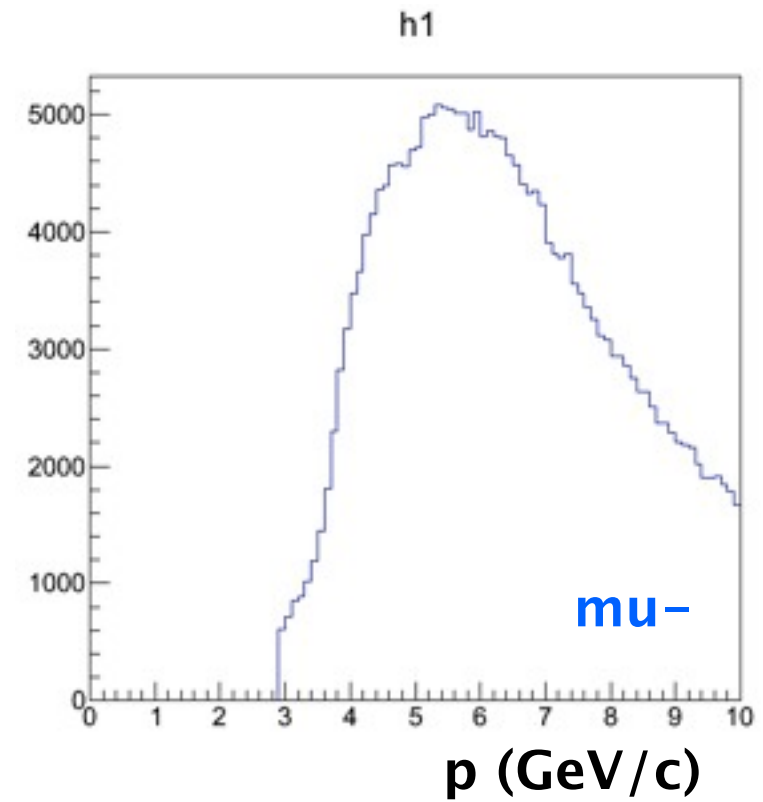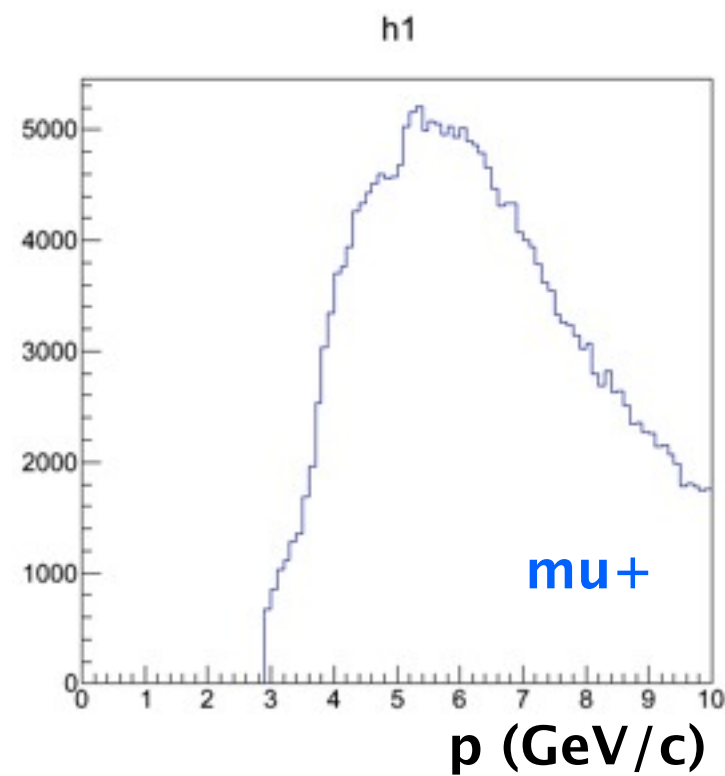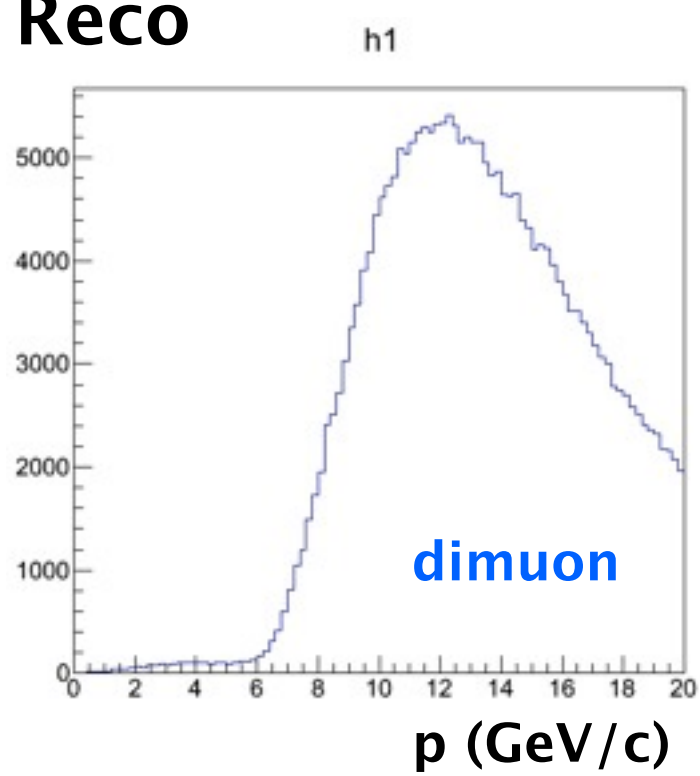




Gen (acc. cut NOT applied)

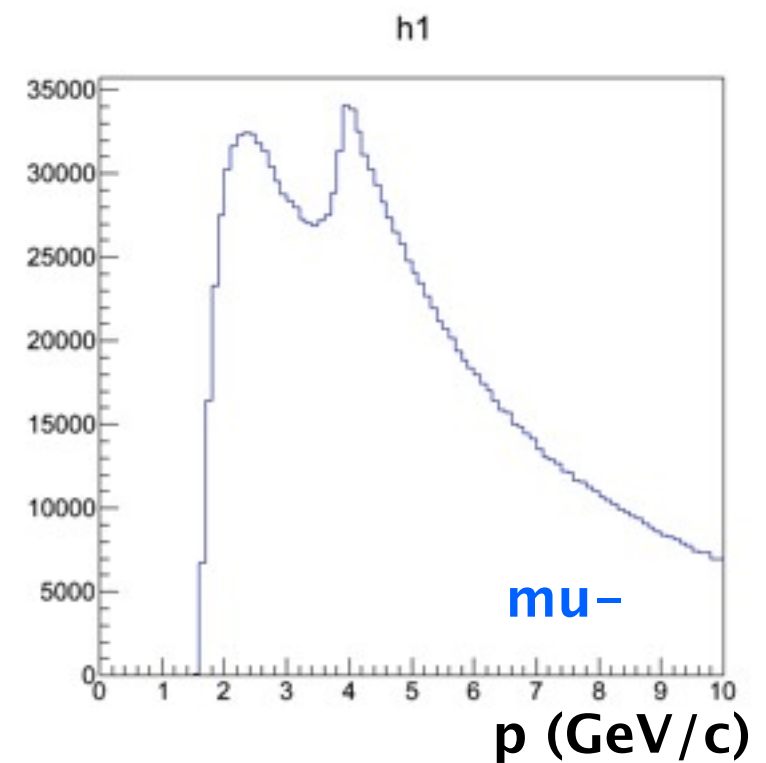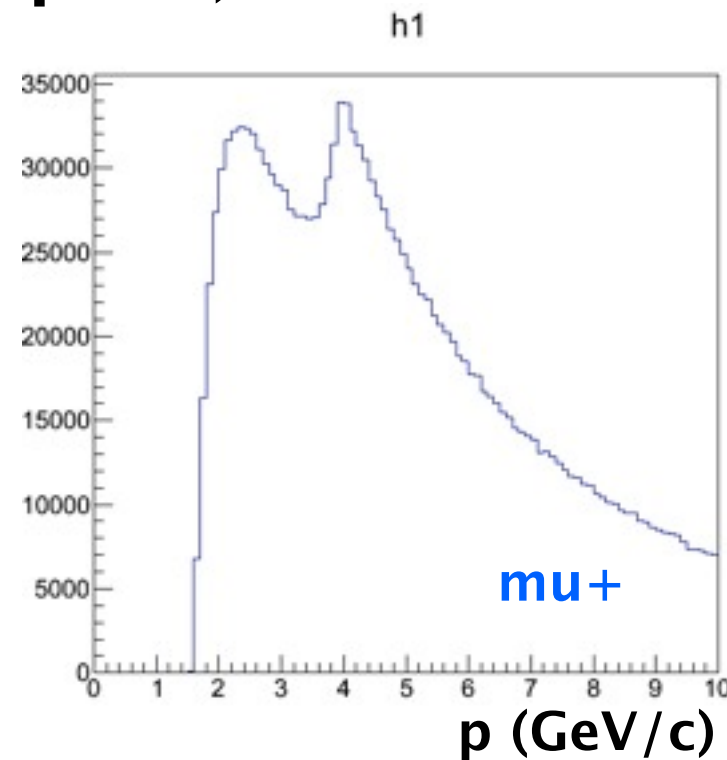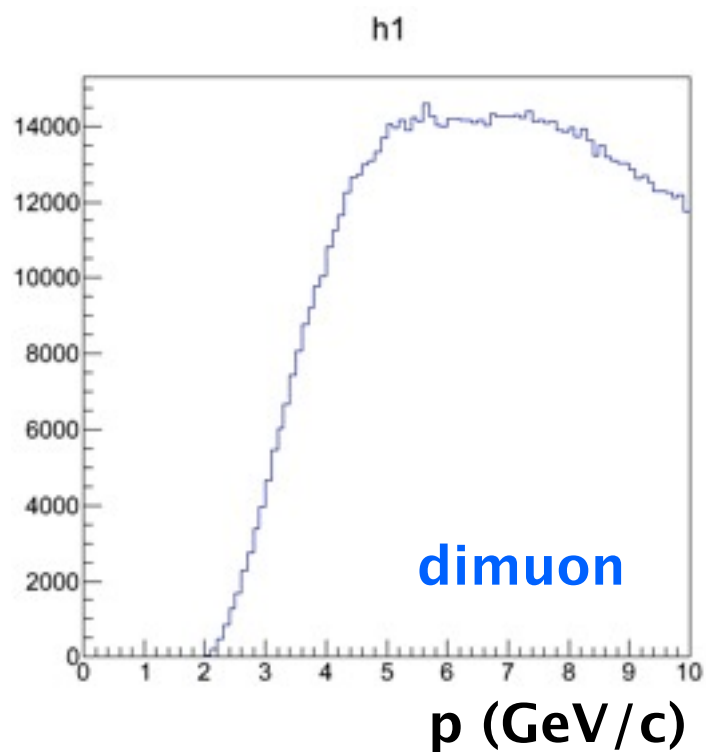




⊗ **Reco**

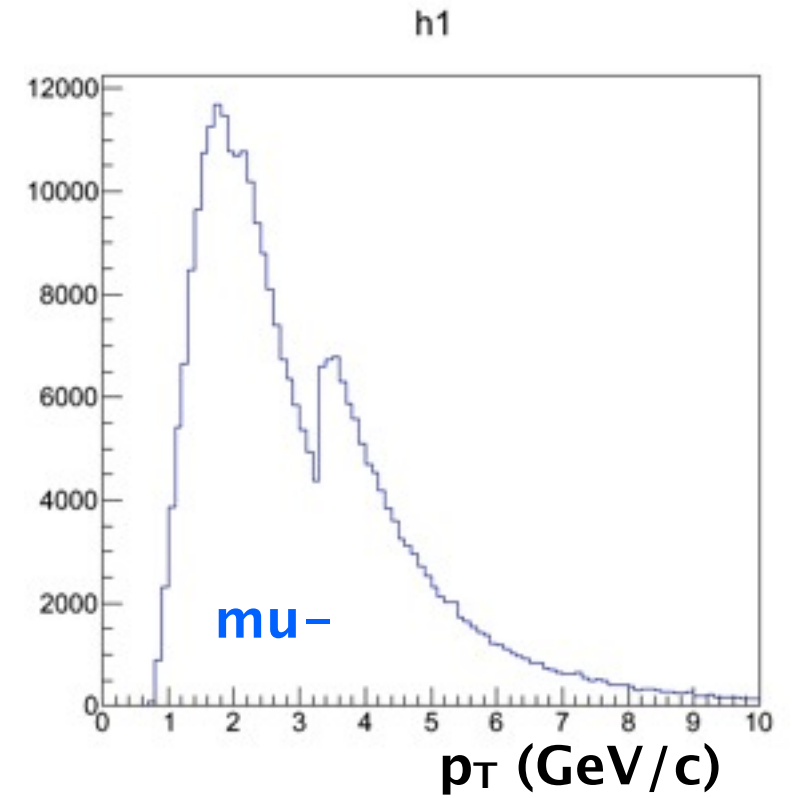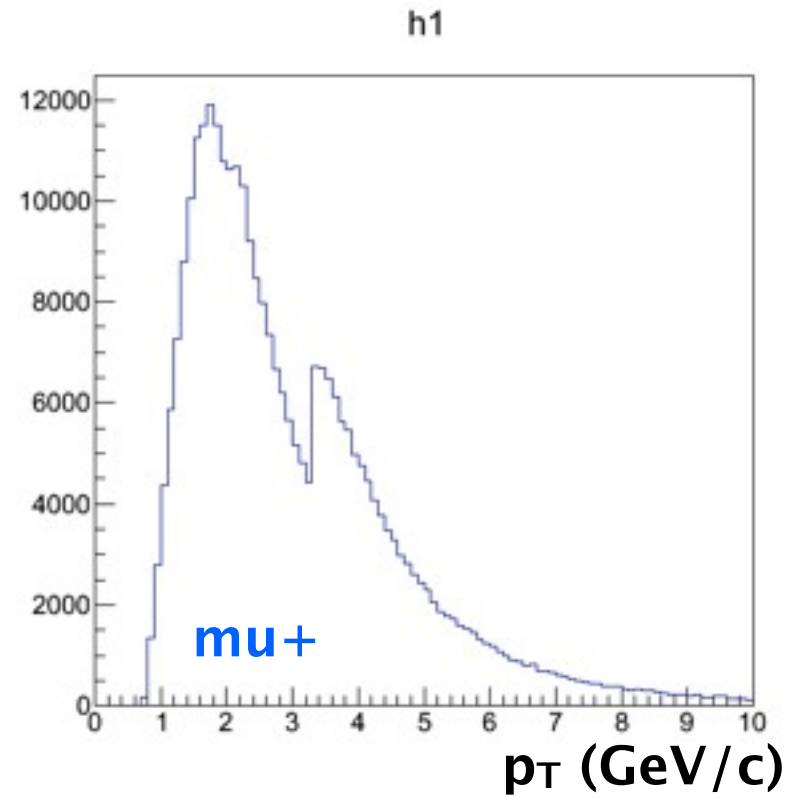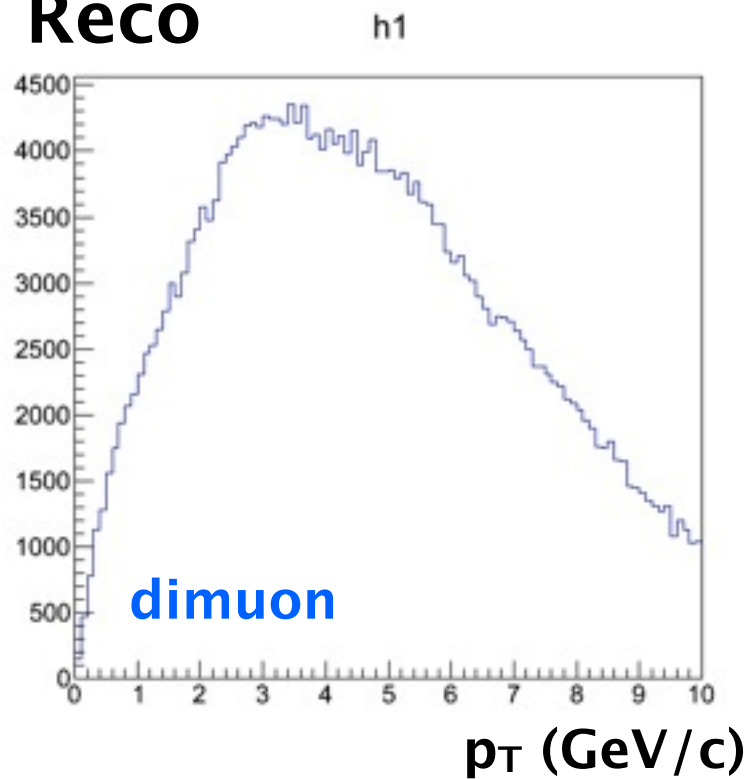




⊗ **Gen (acc. cut NOT applied)**

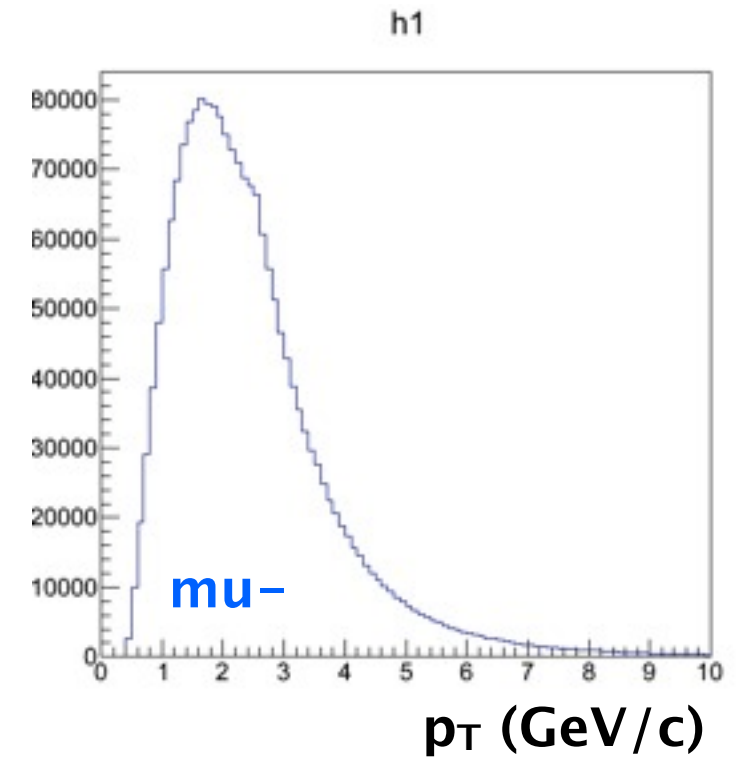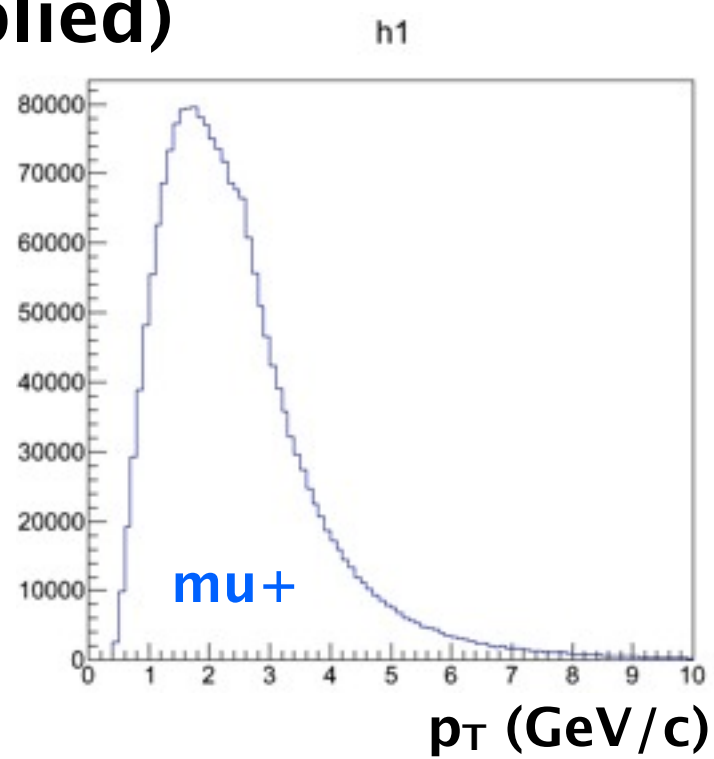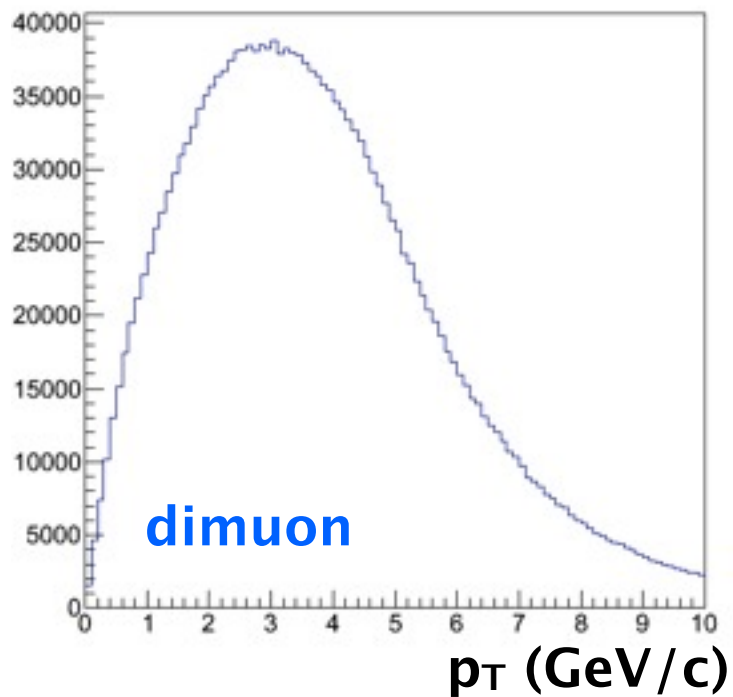




Ⓜ **Reco**

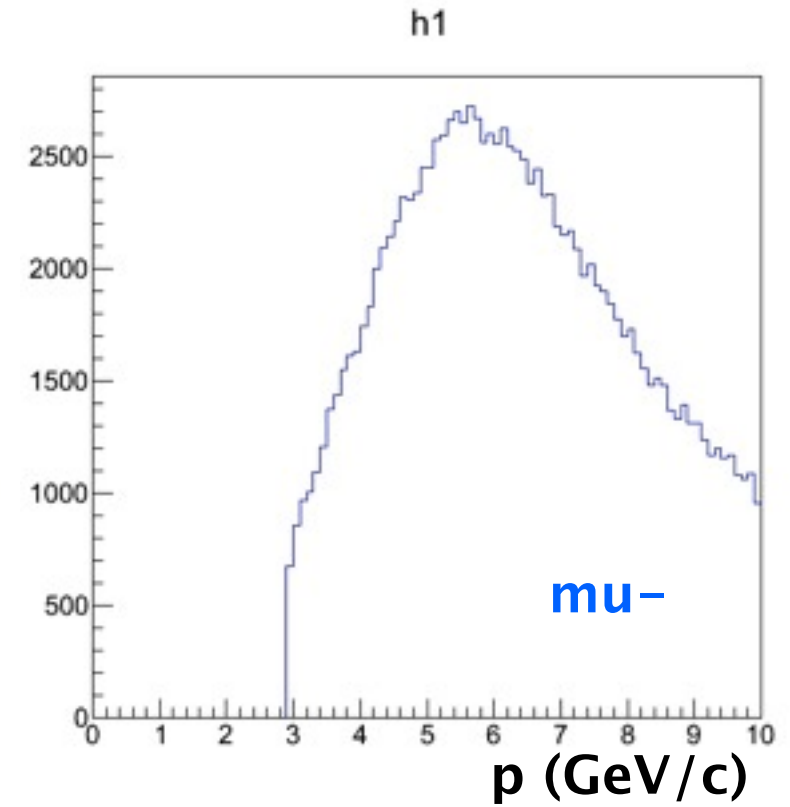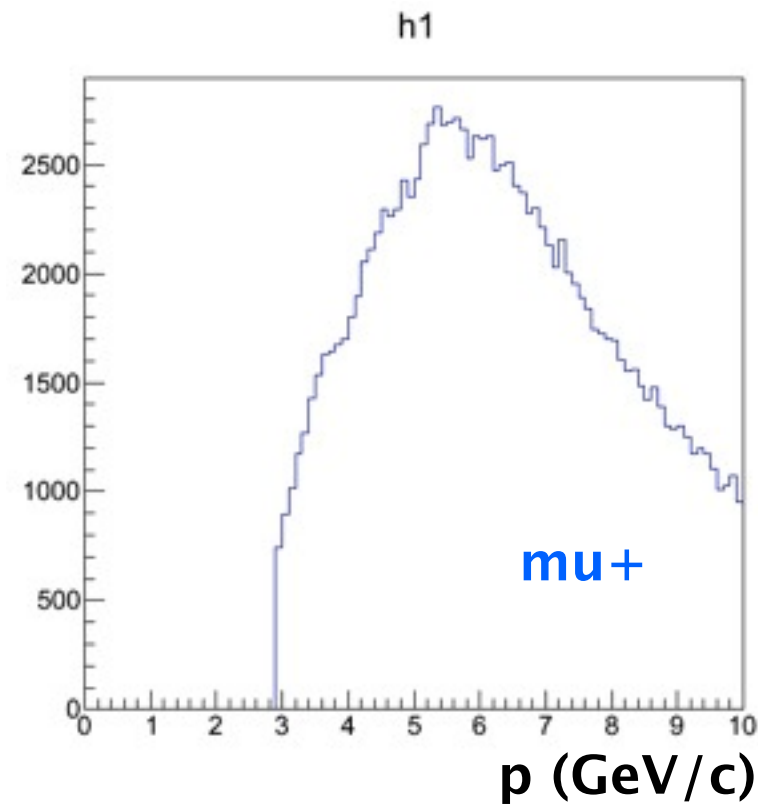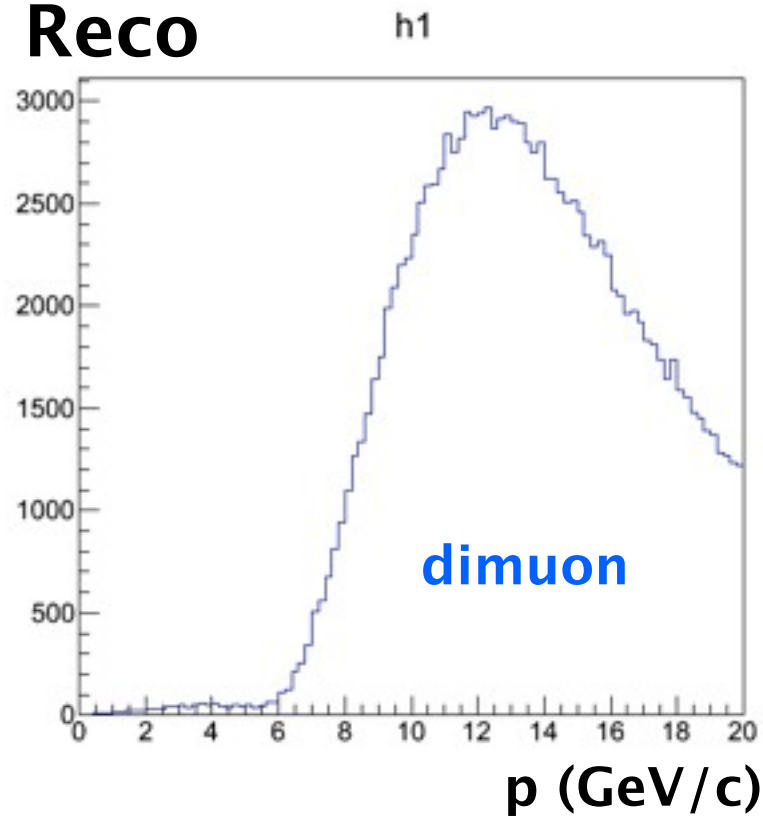




Ⓜ **Gen (acc. cut NOT applied)**

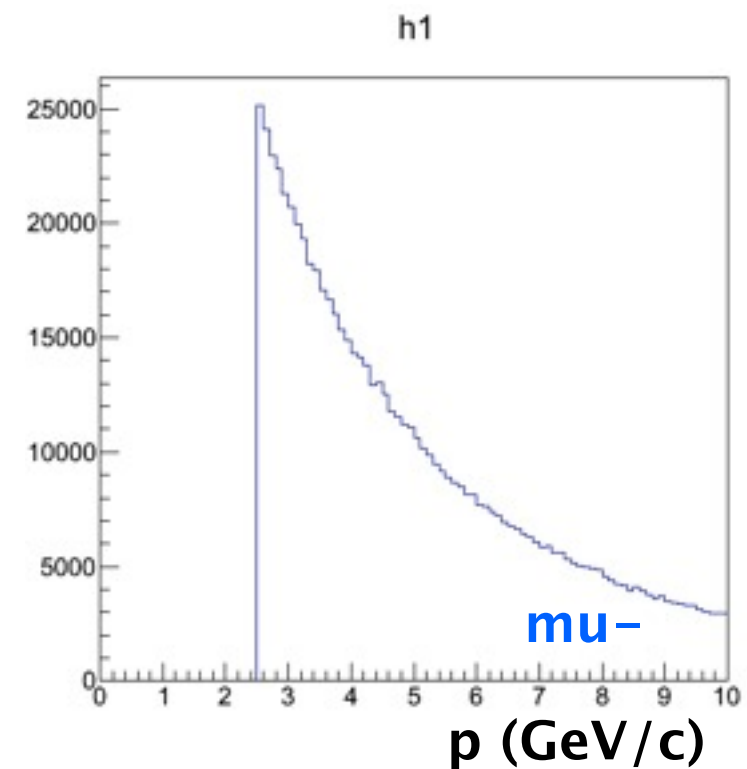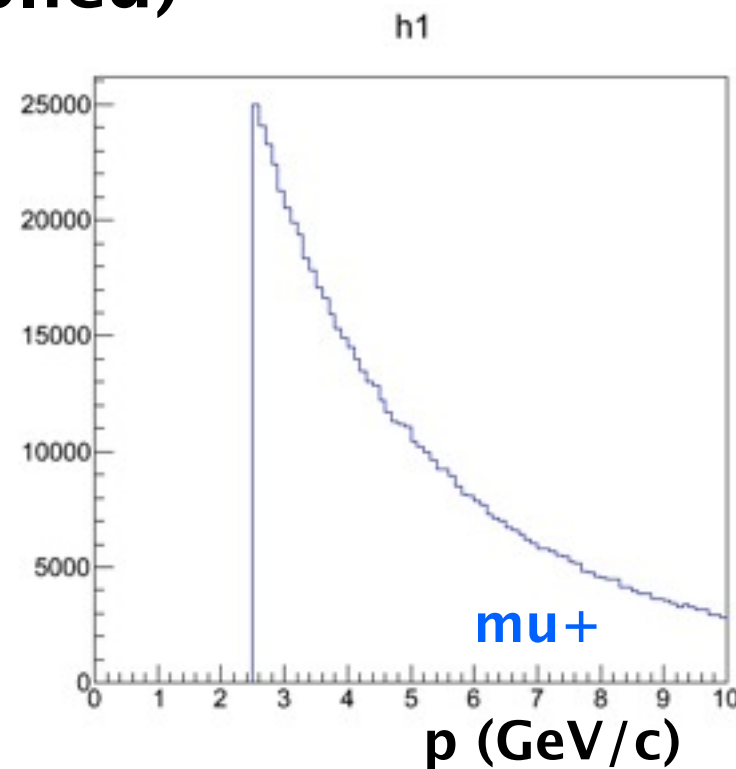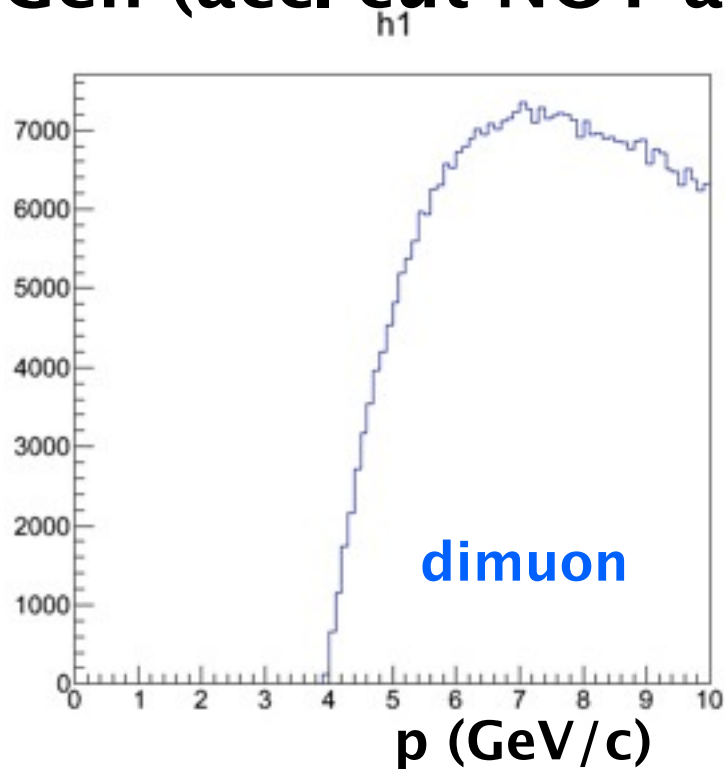



⊕ **Reco**

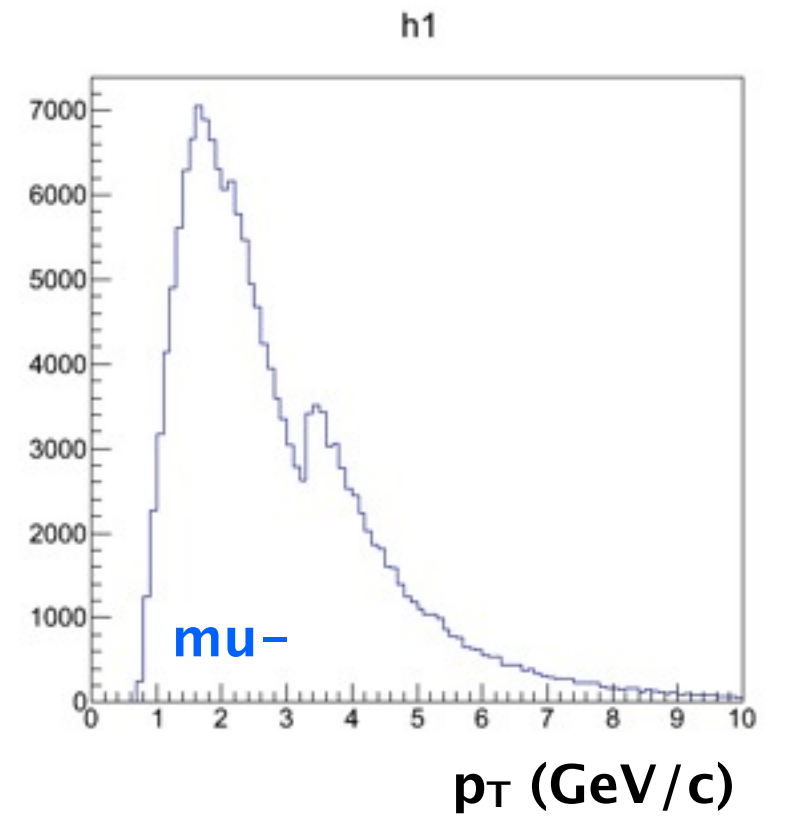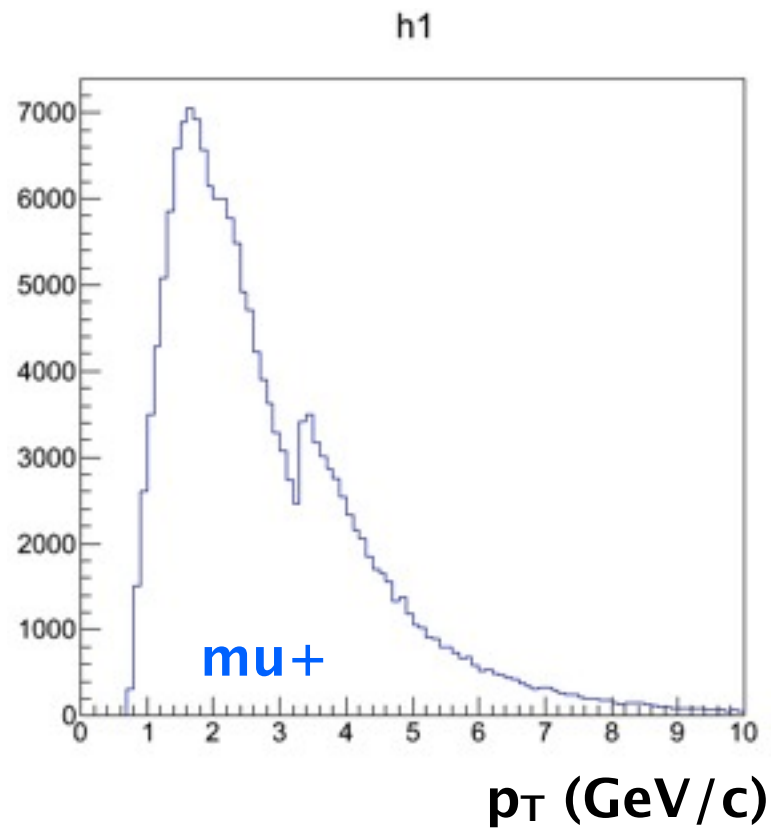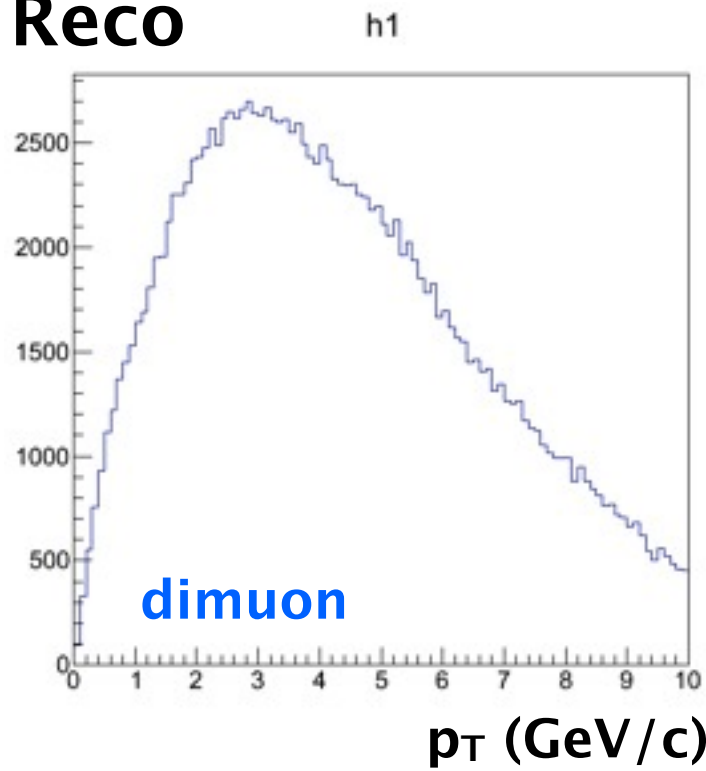





⊕ **Gen (acc. cut NOT applied)**

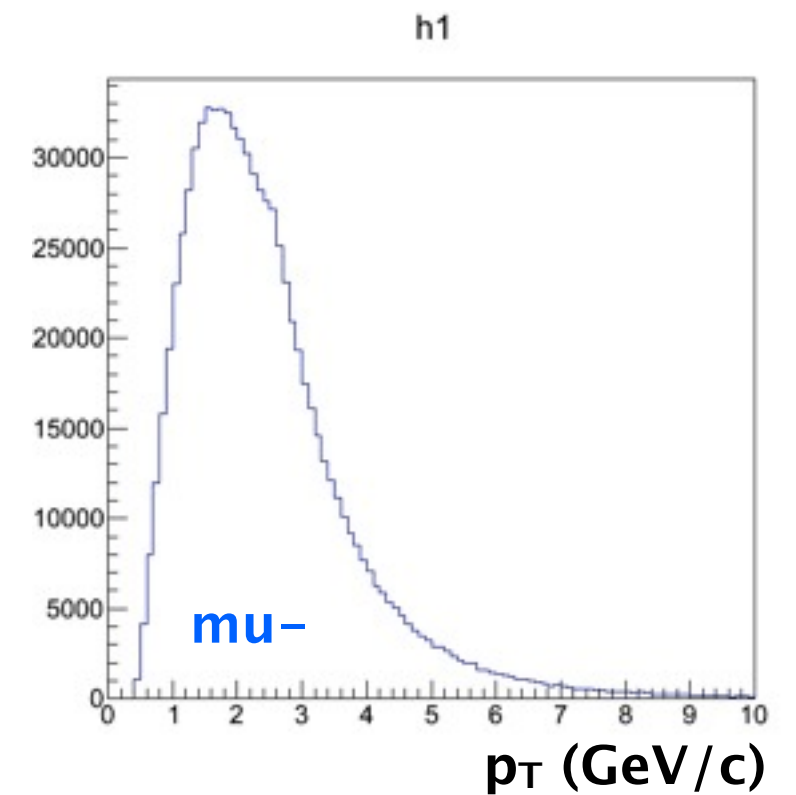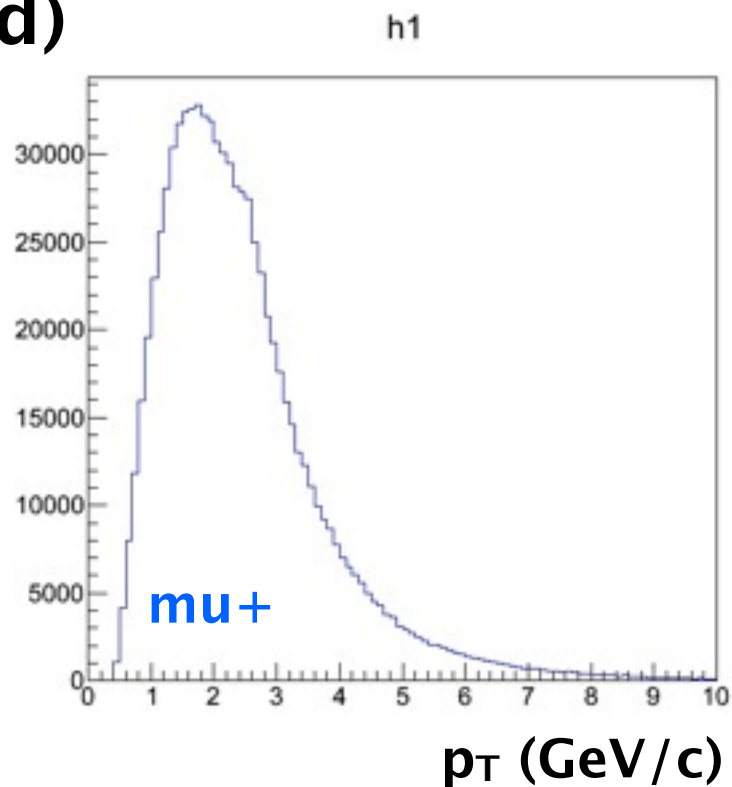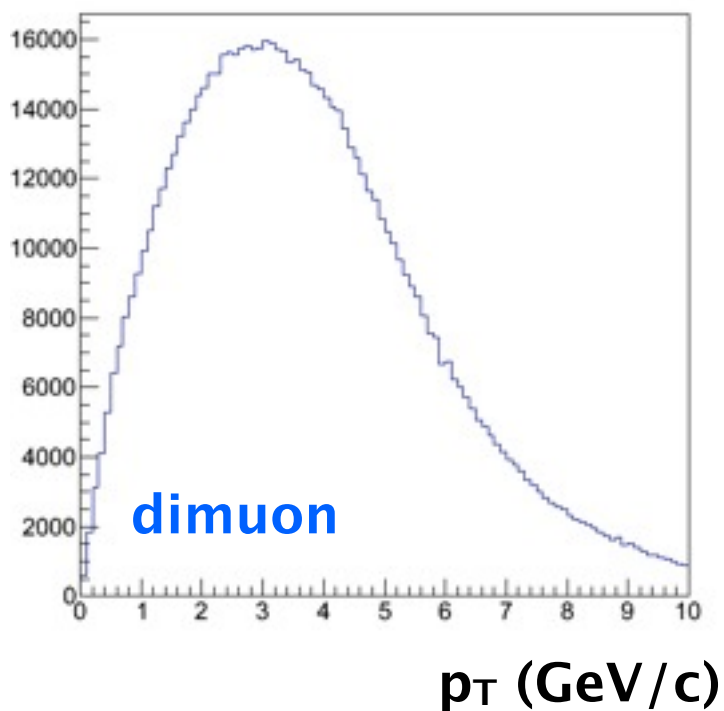







⊗ dimuon p_T

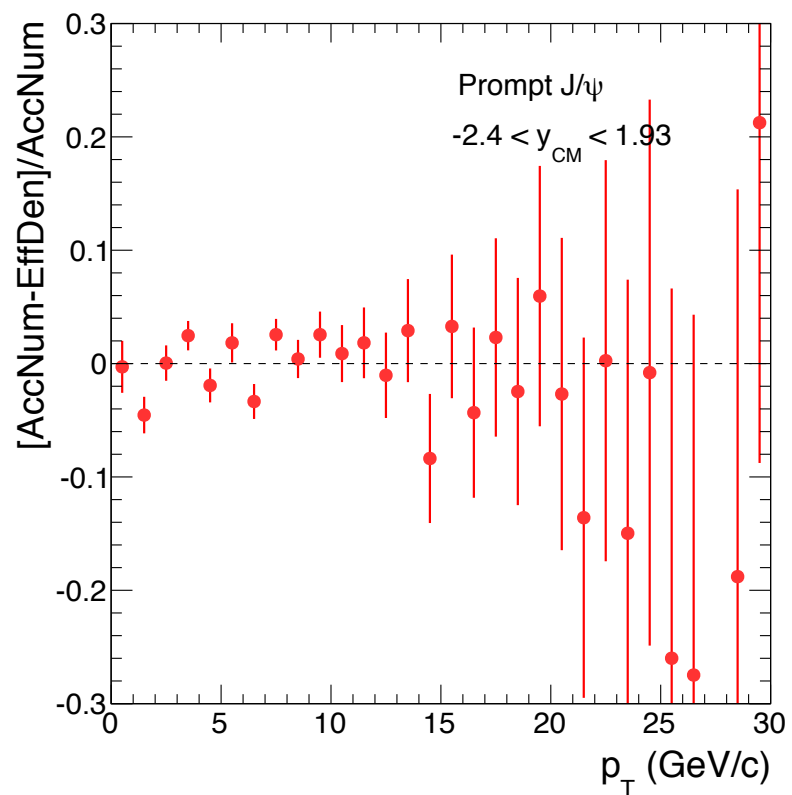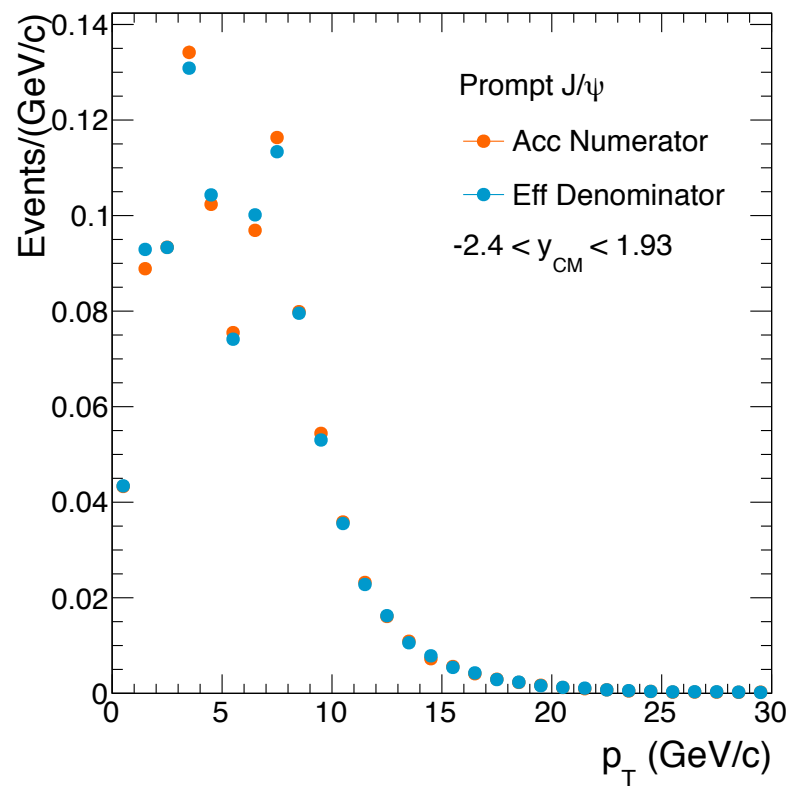







⊗ dimuon rapidity

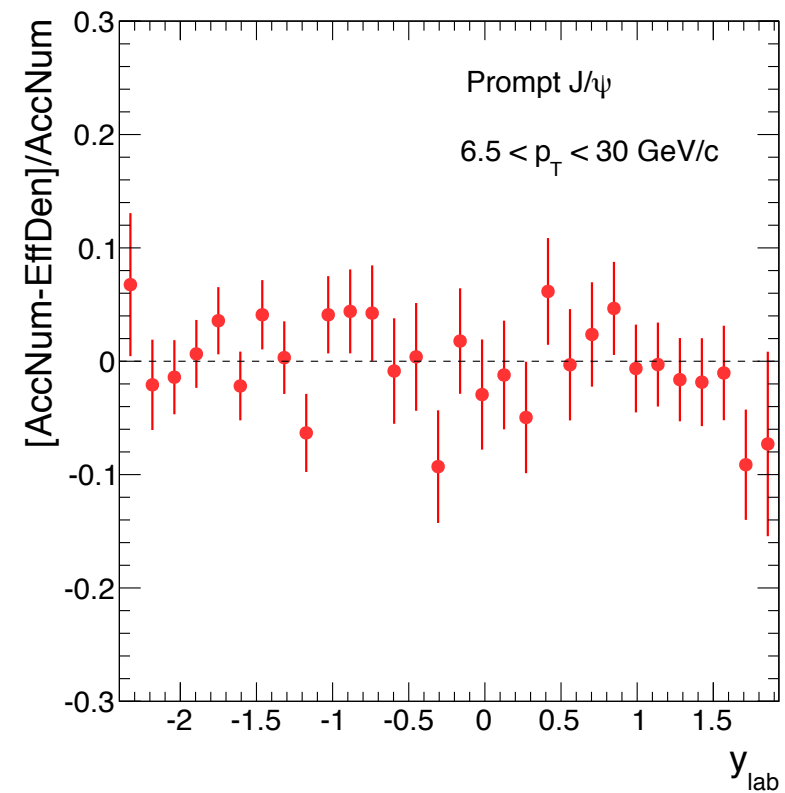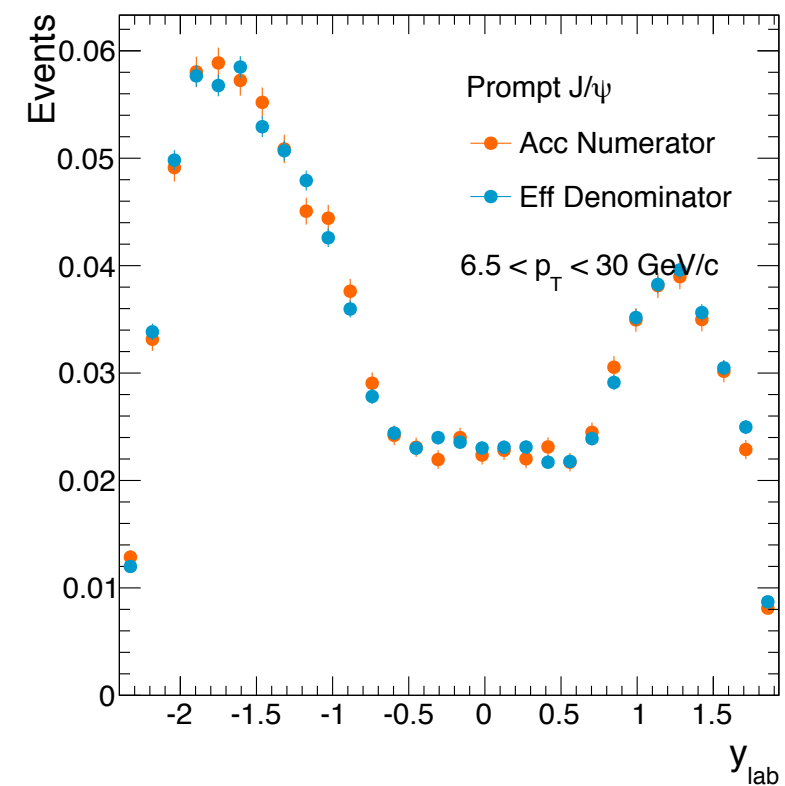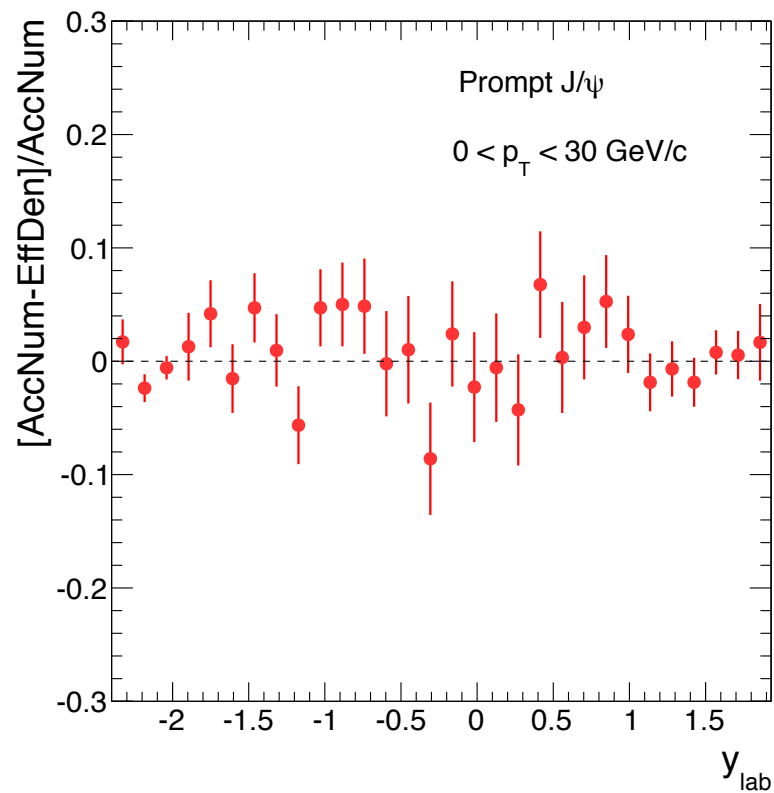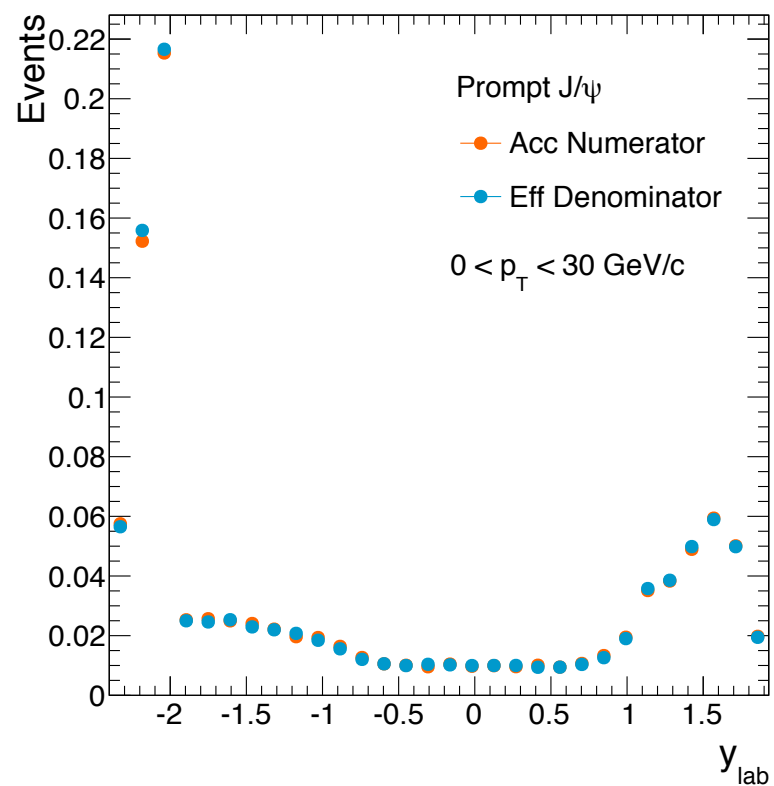





dimuon

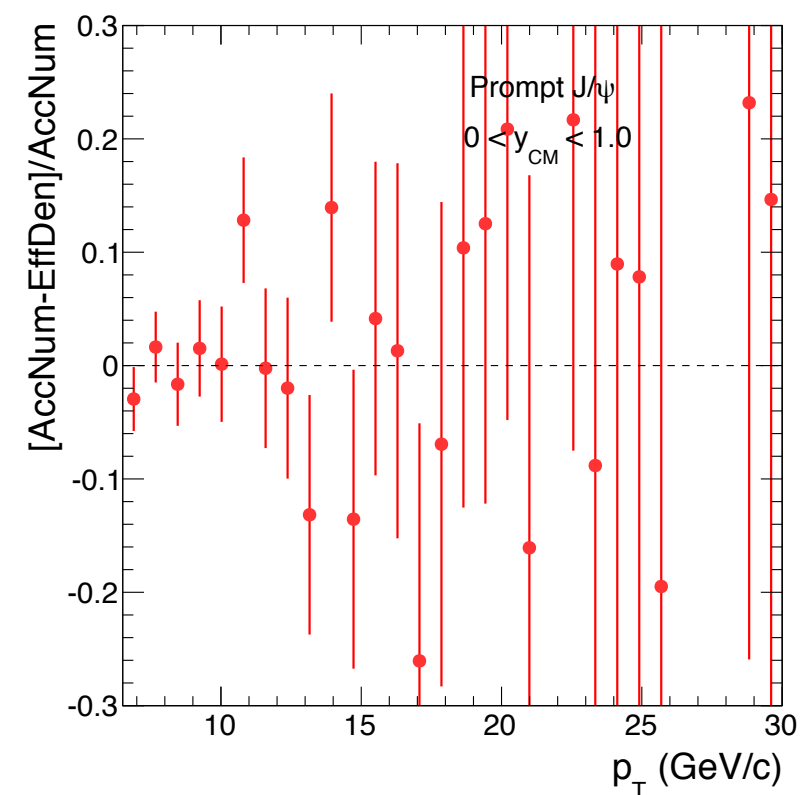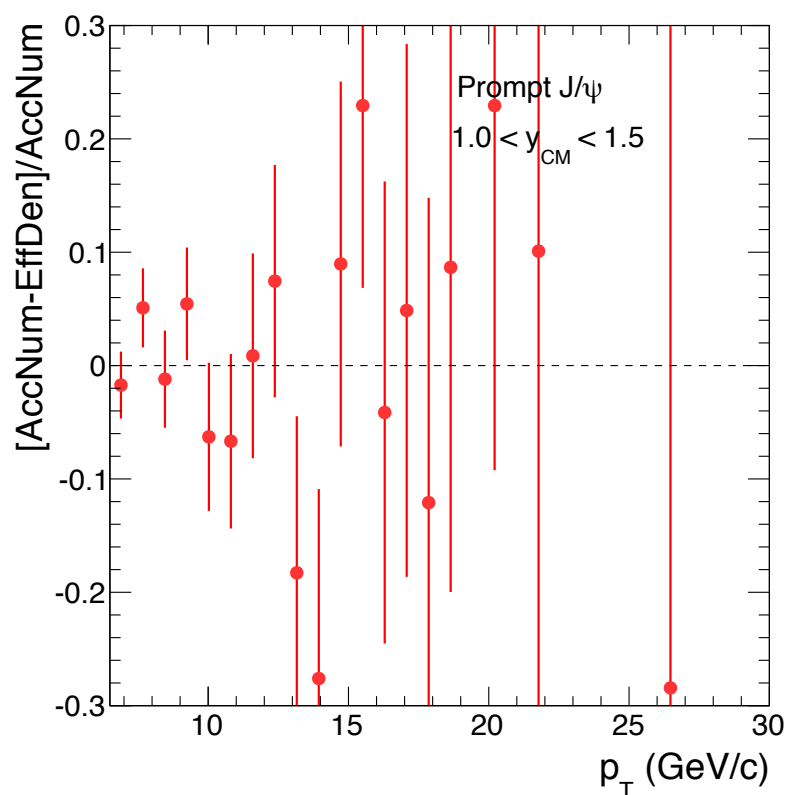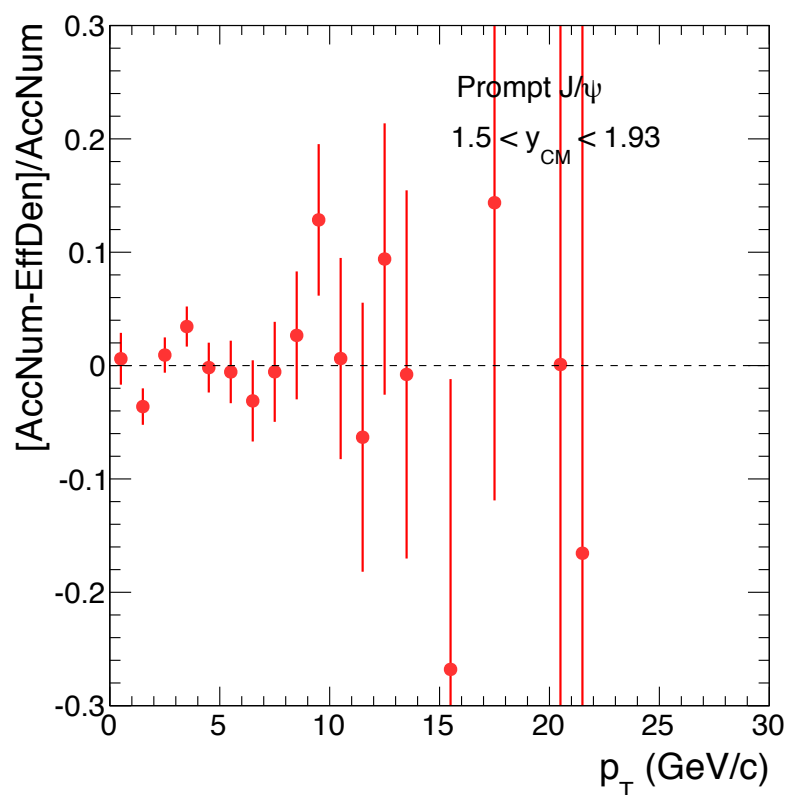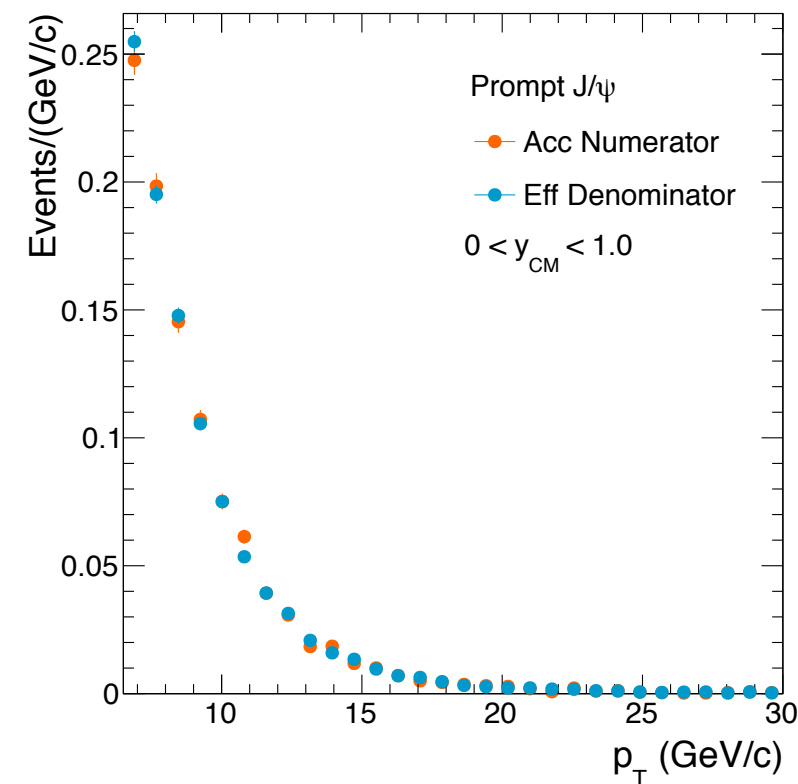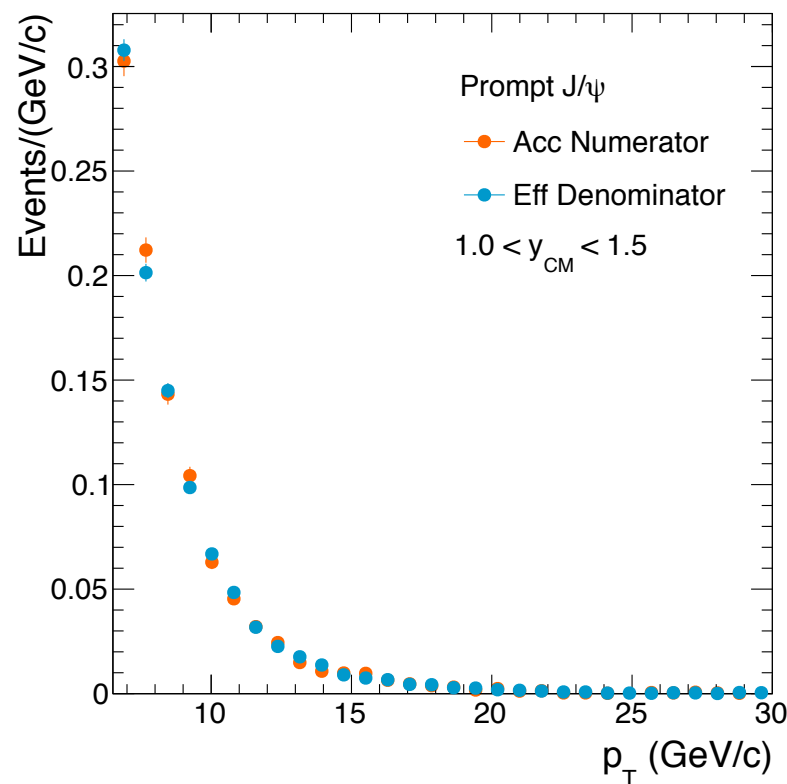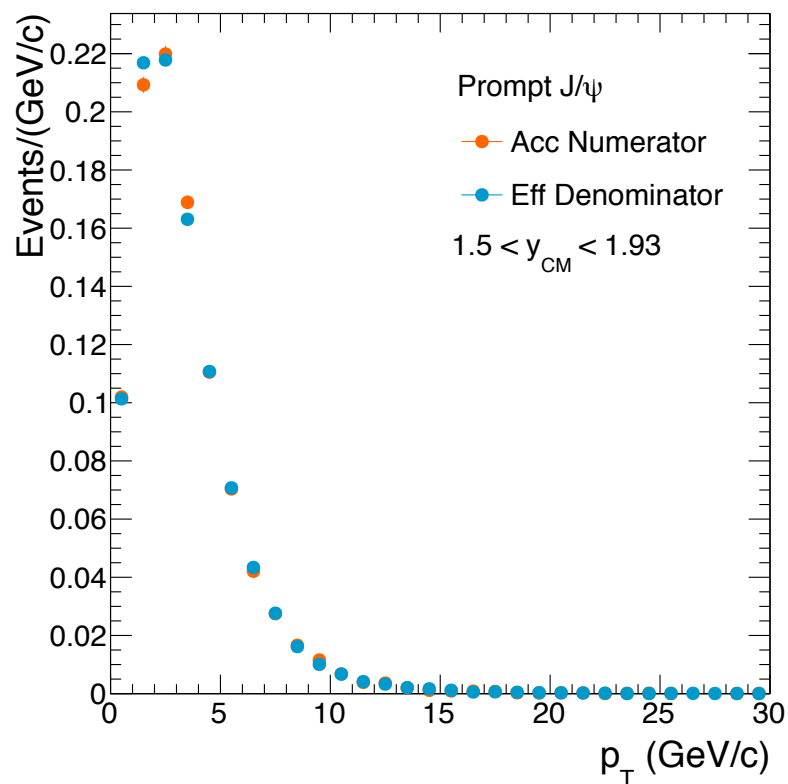







dimuon

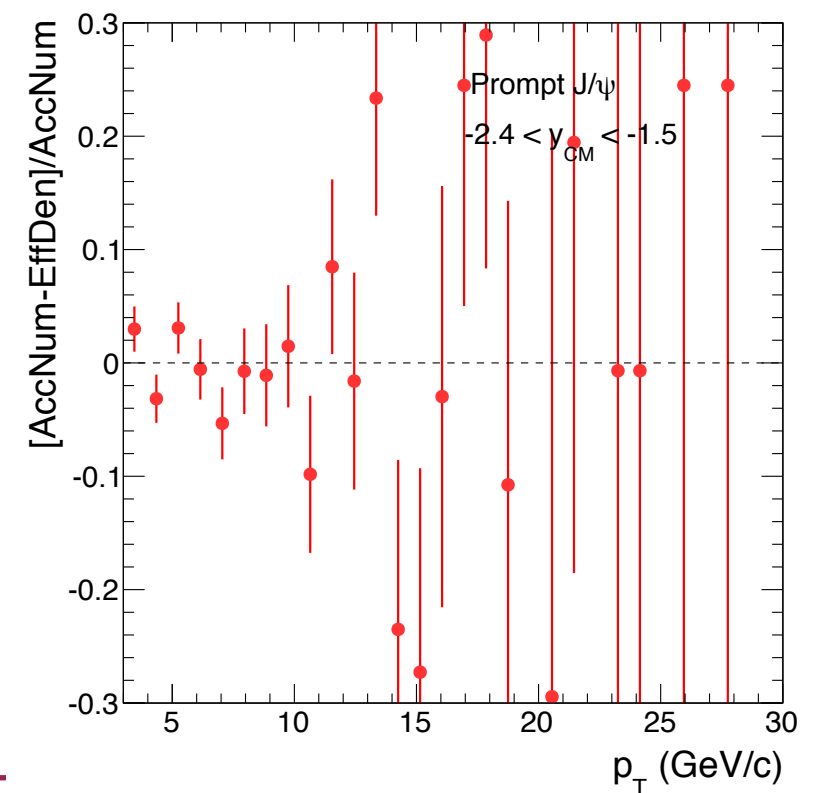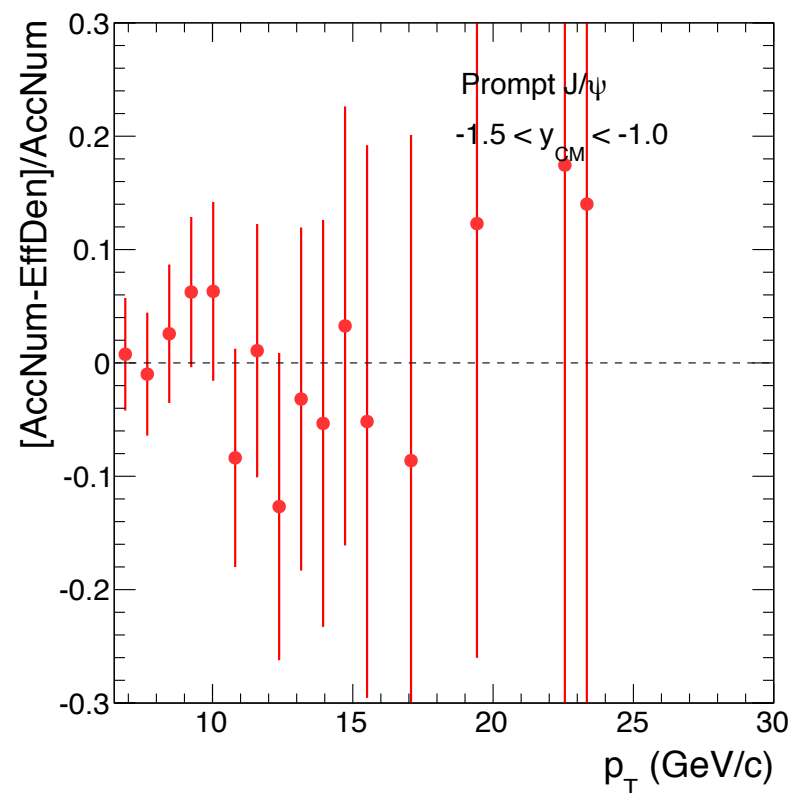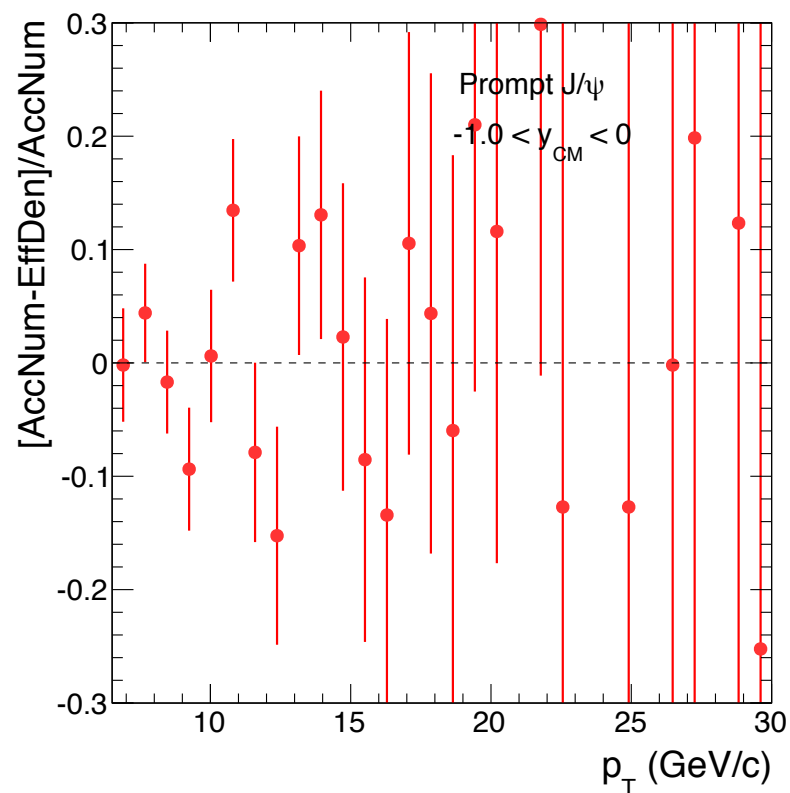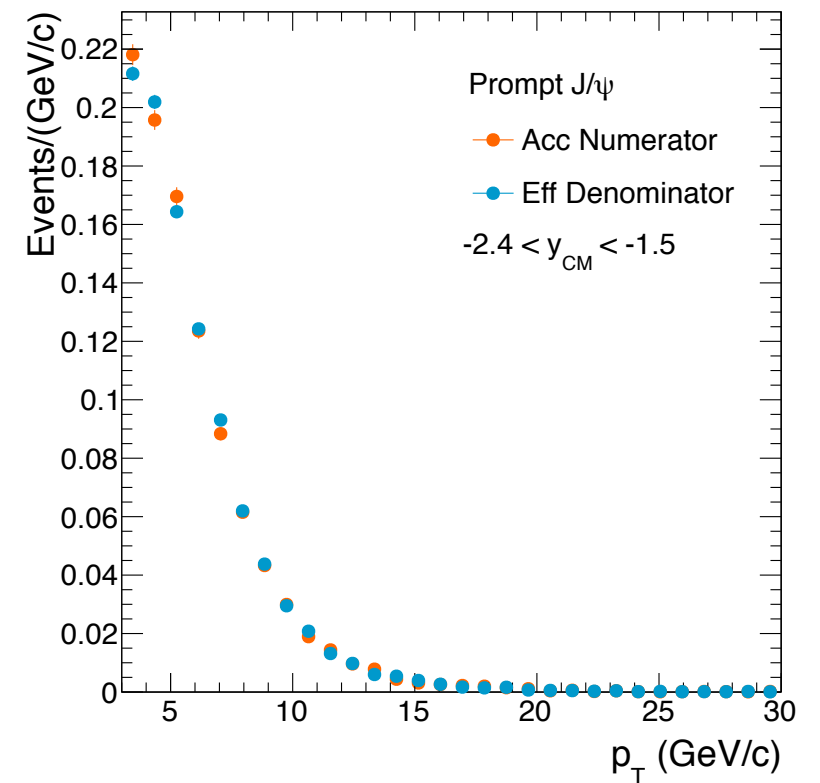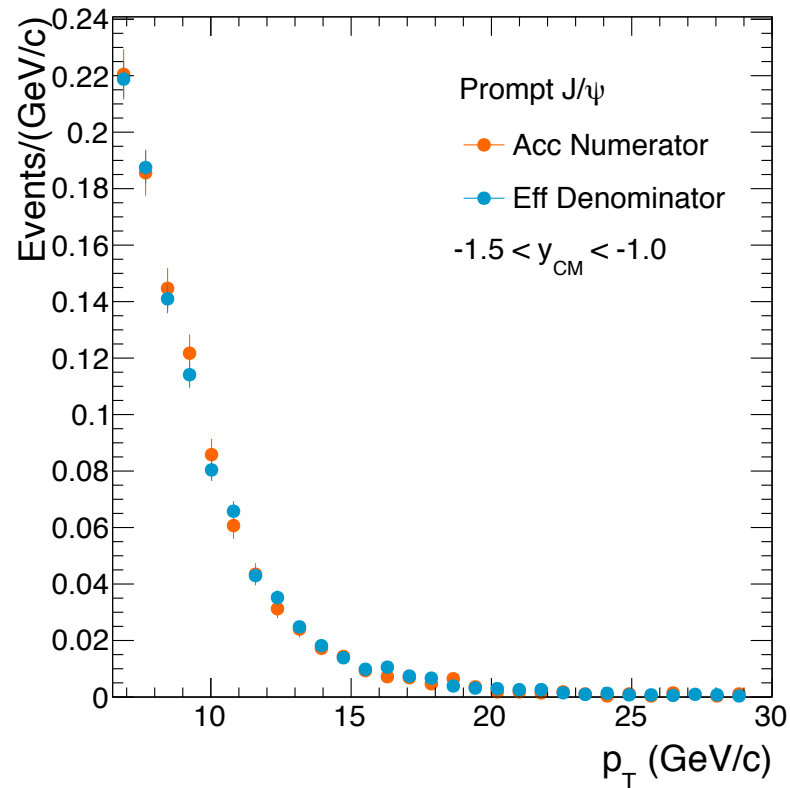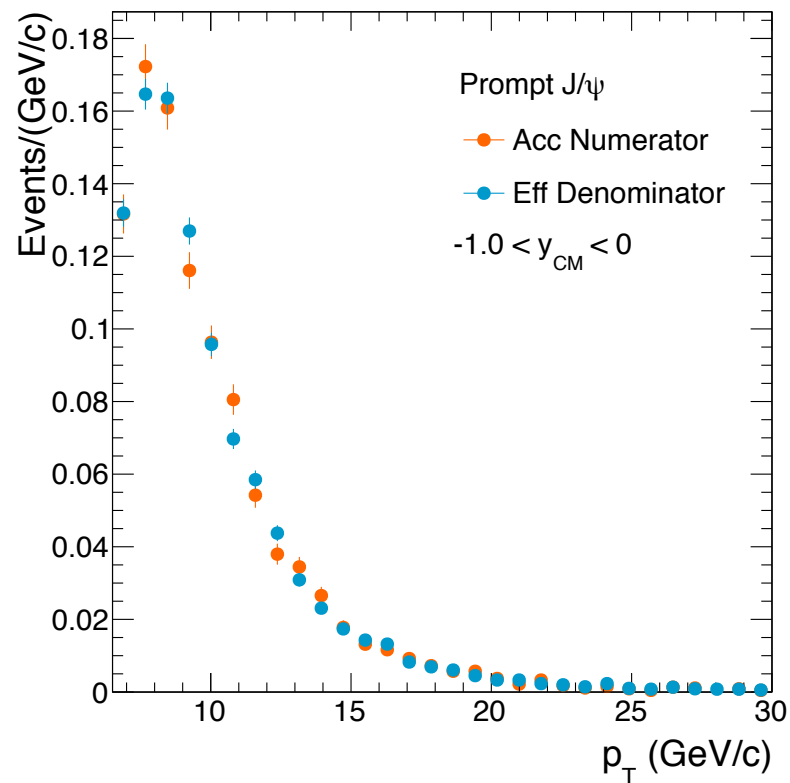







⊕ single muons p_T & η

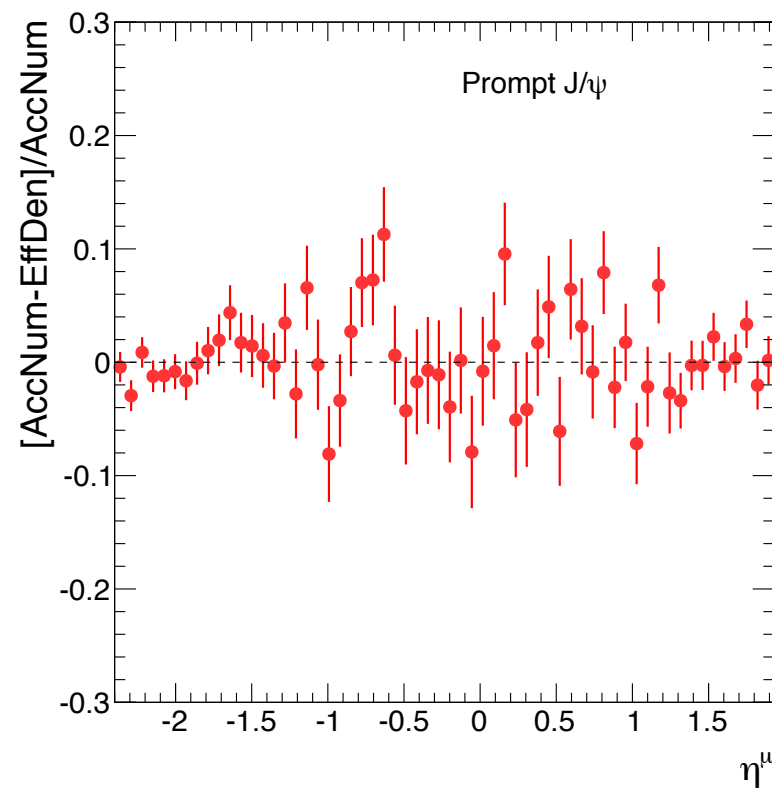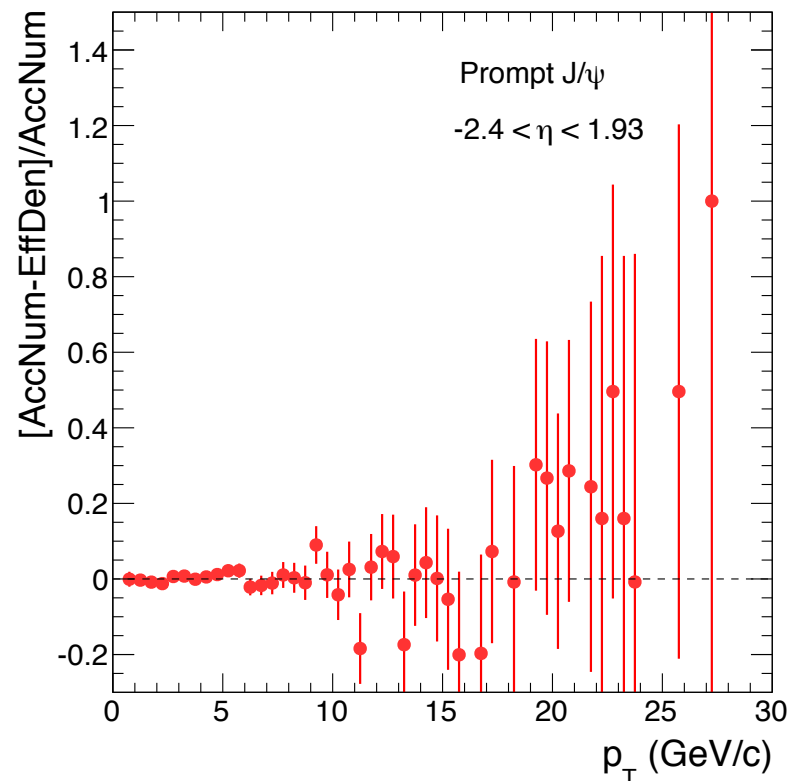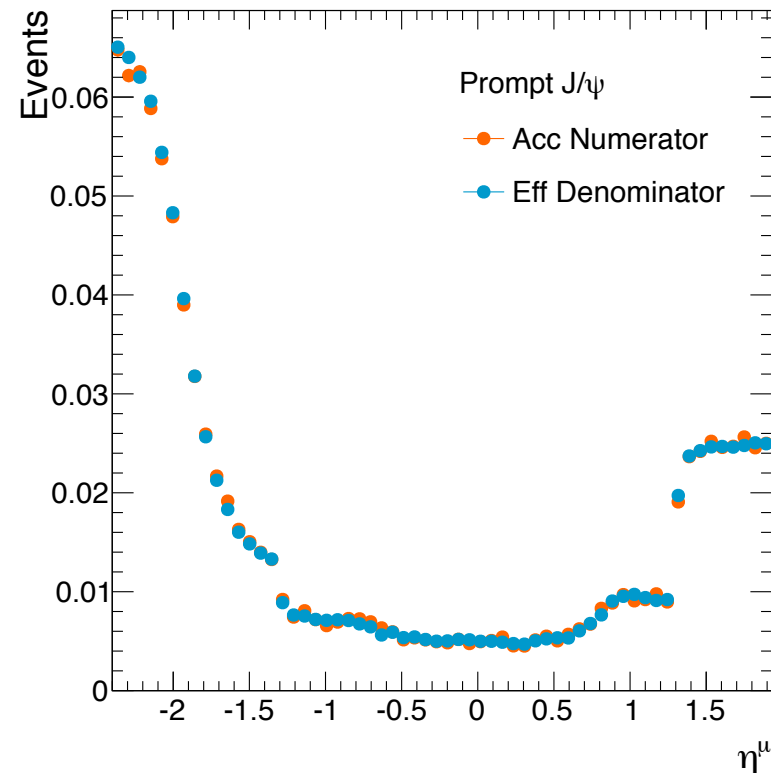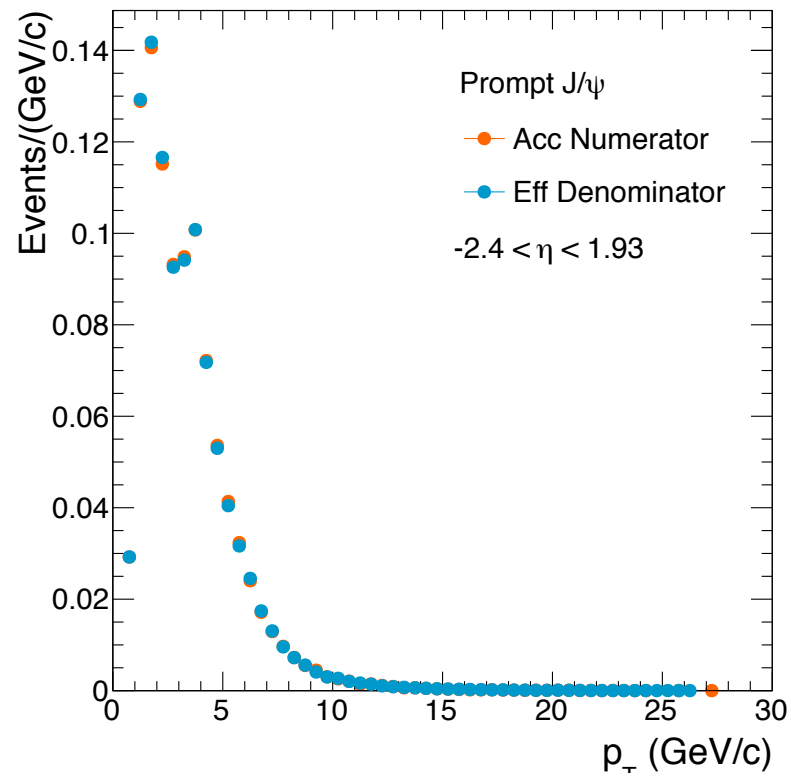







single muons

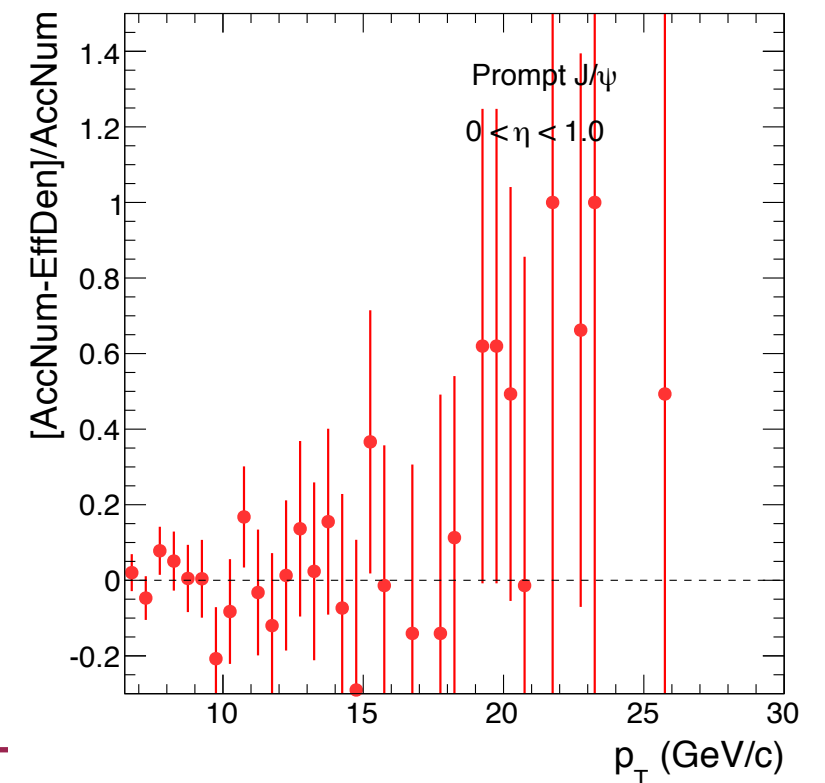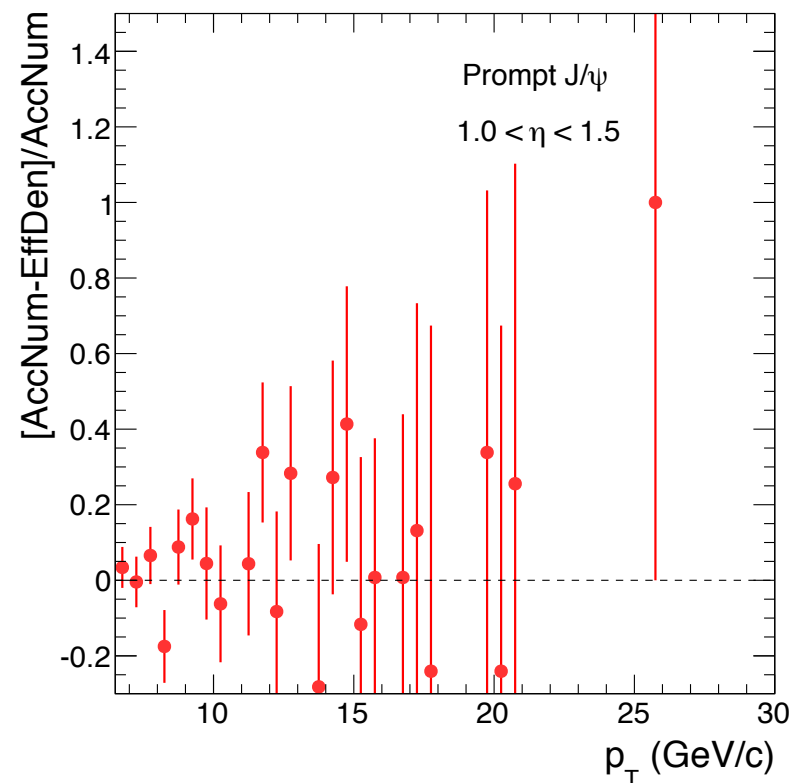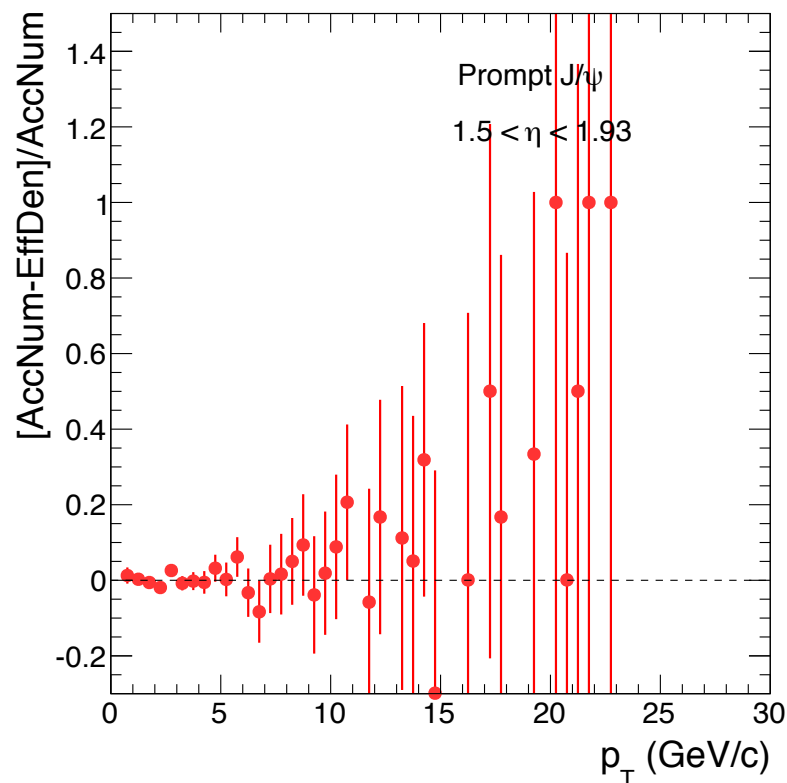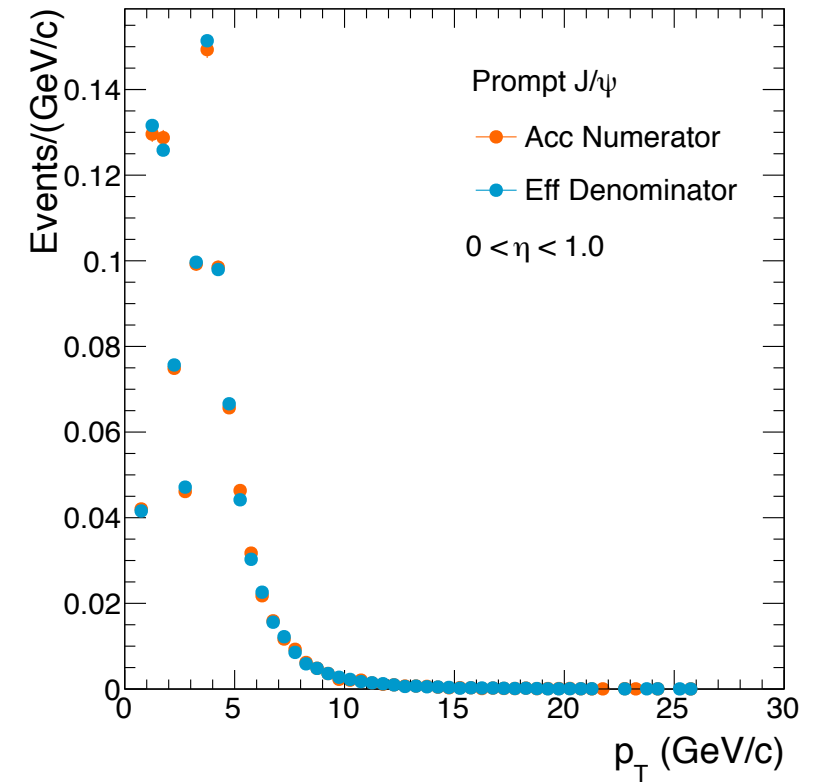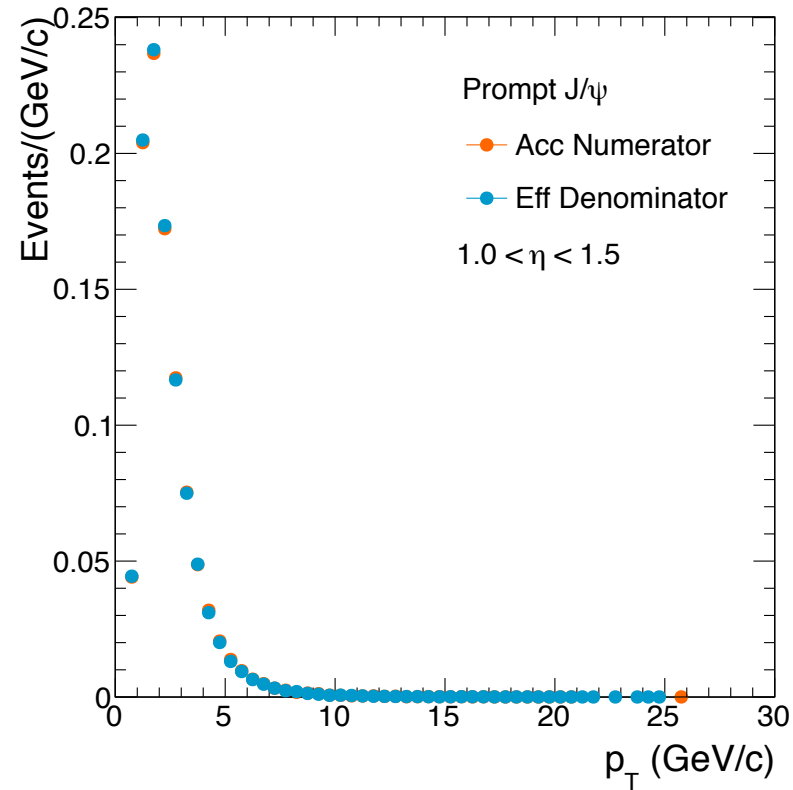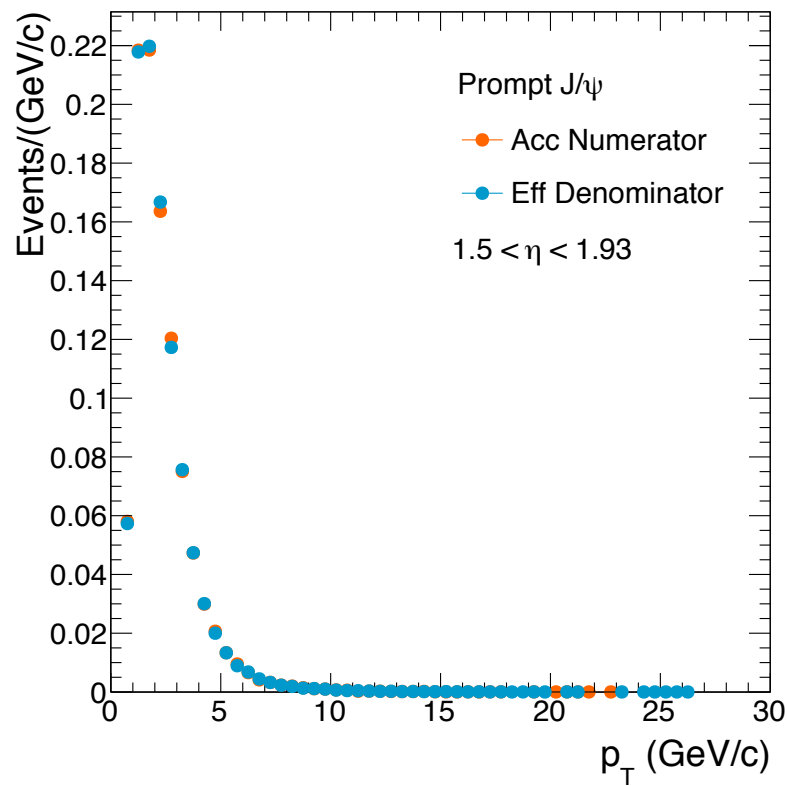



single muons

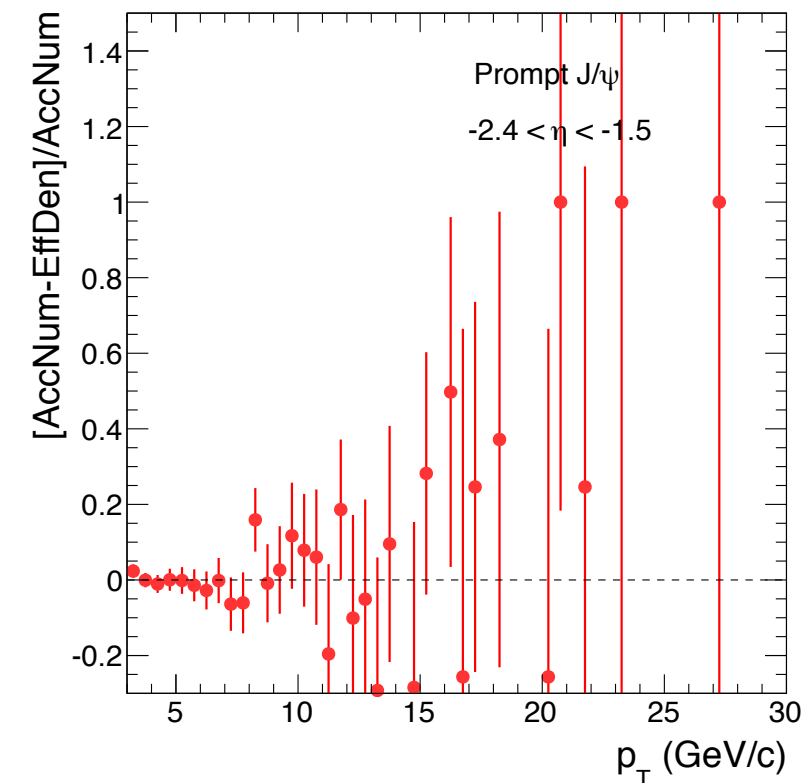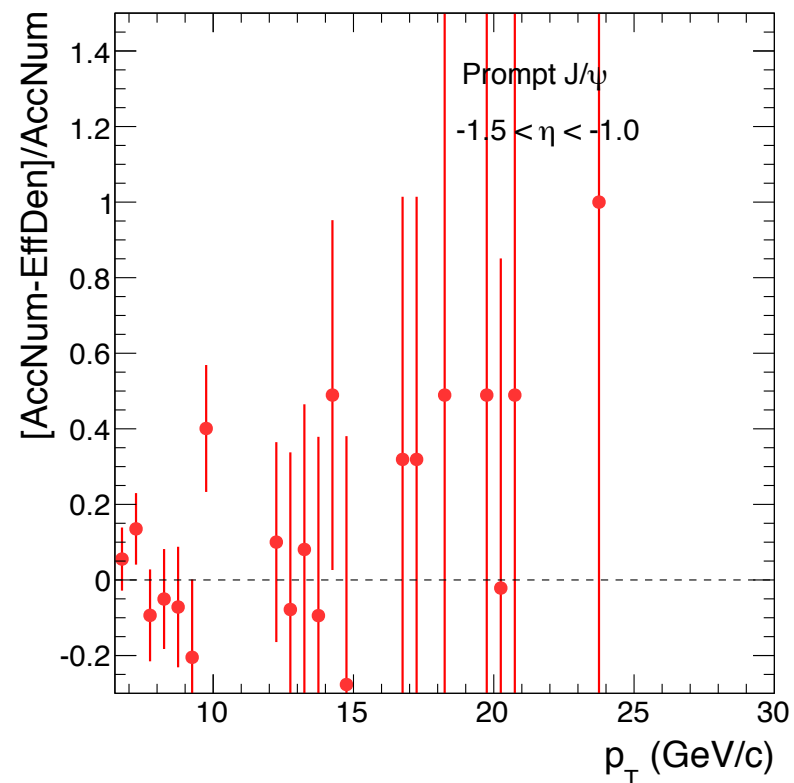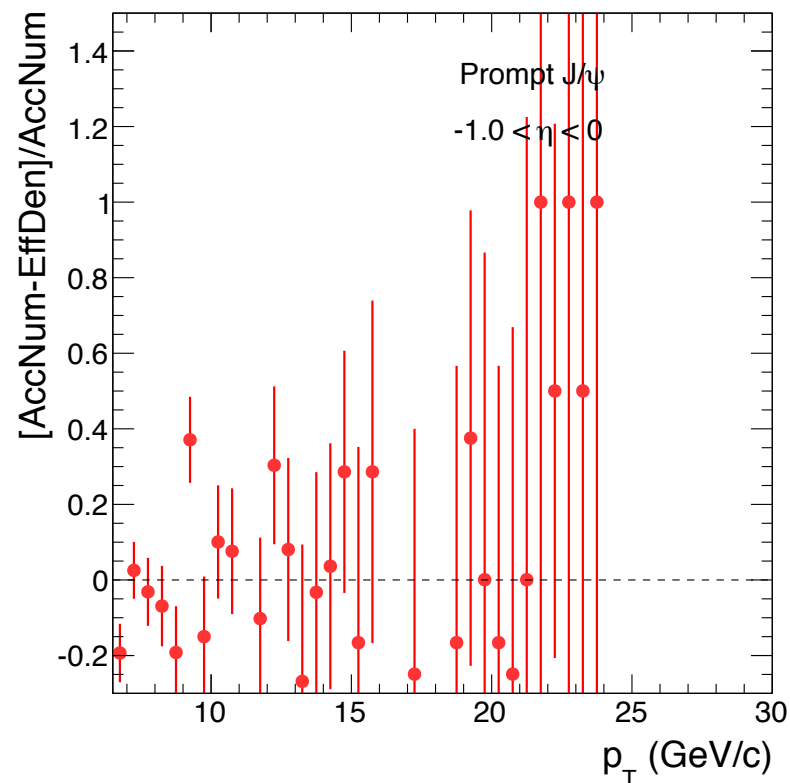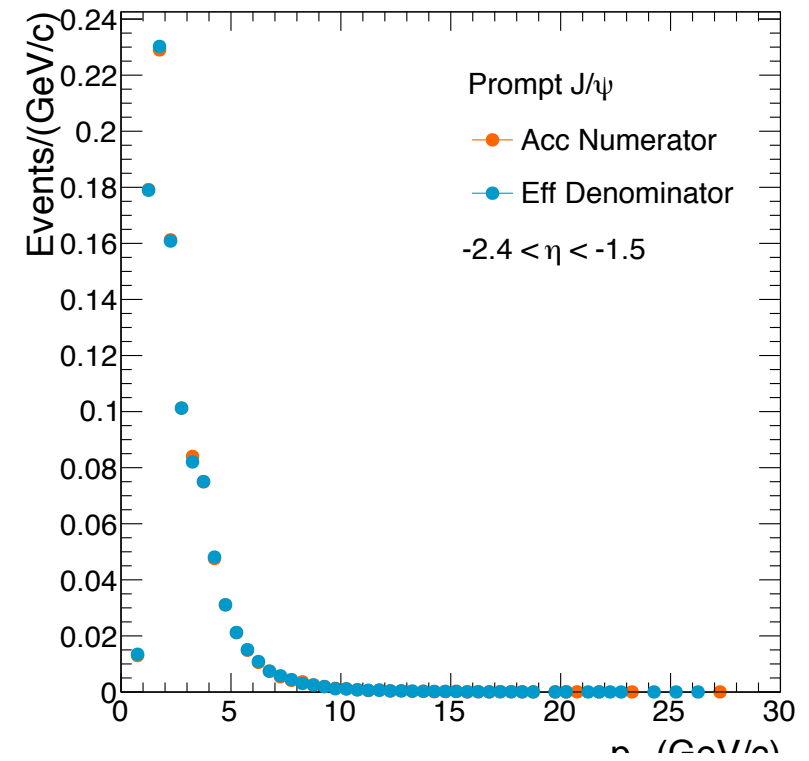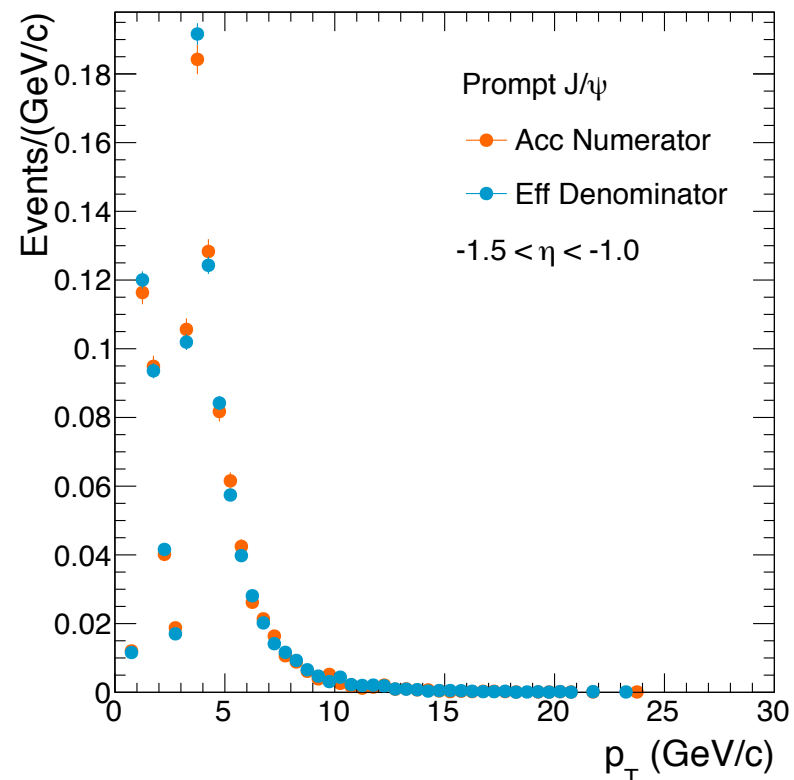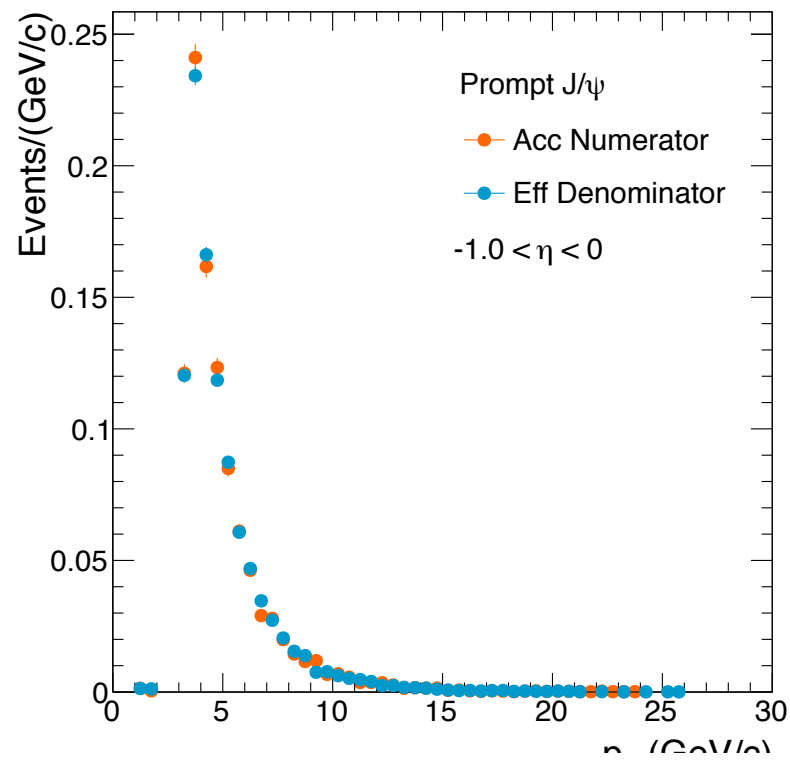

single muons

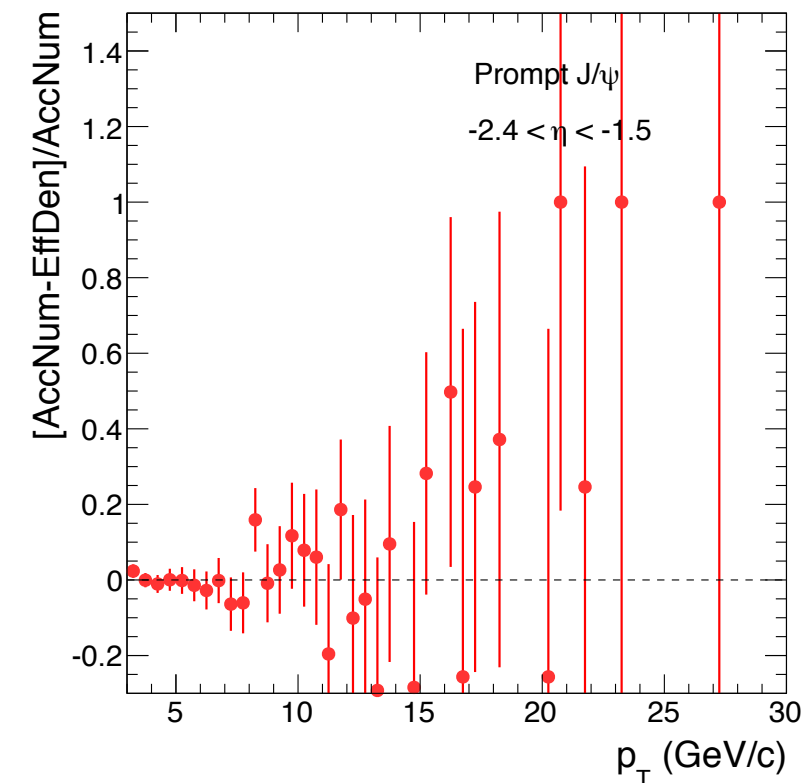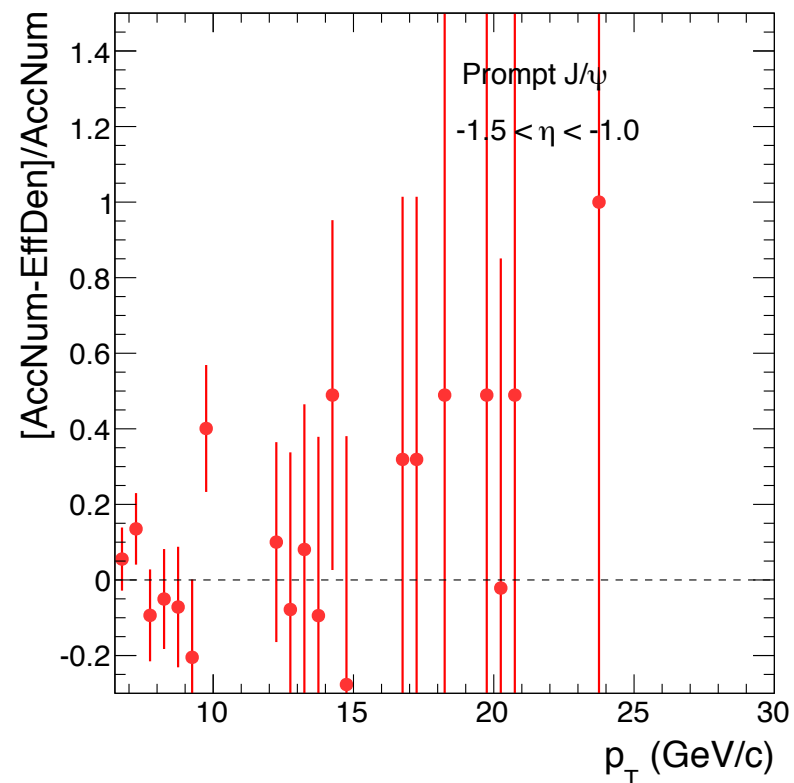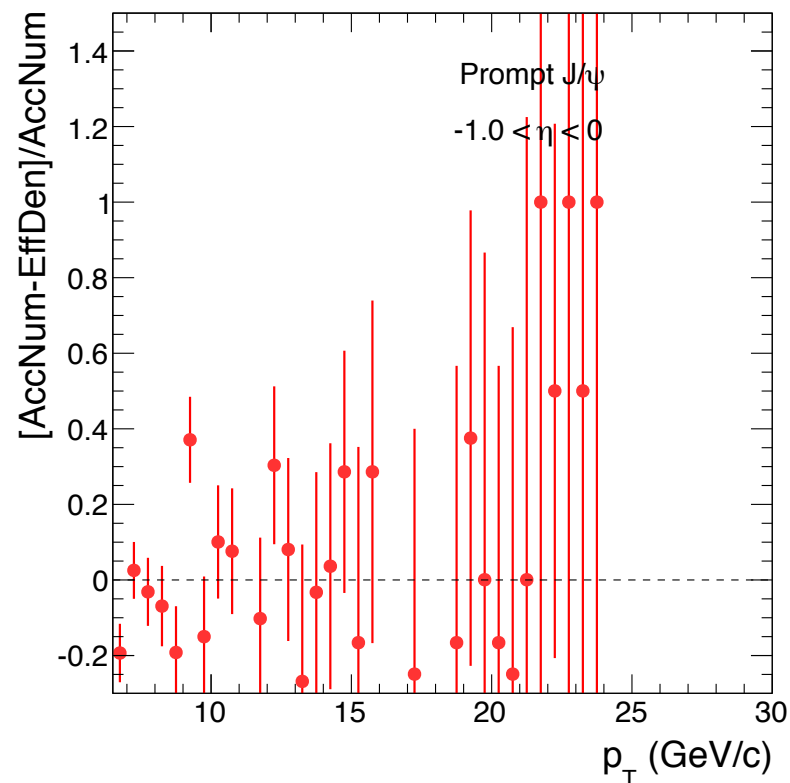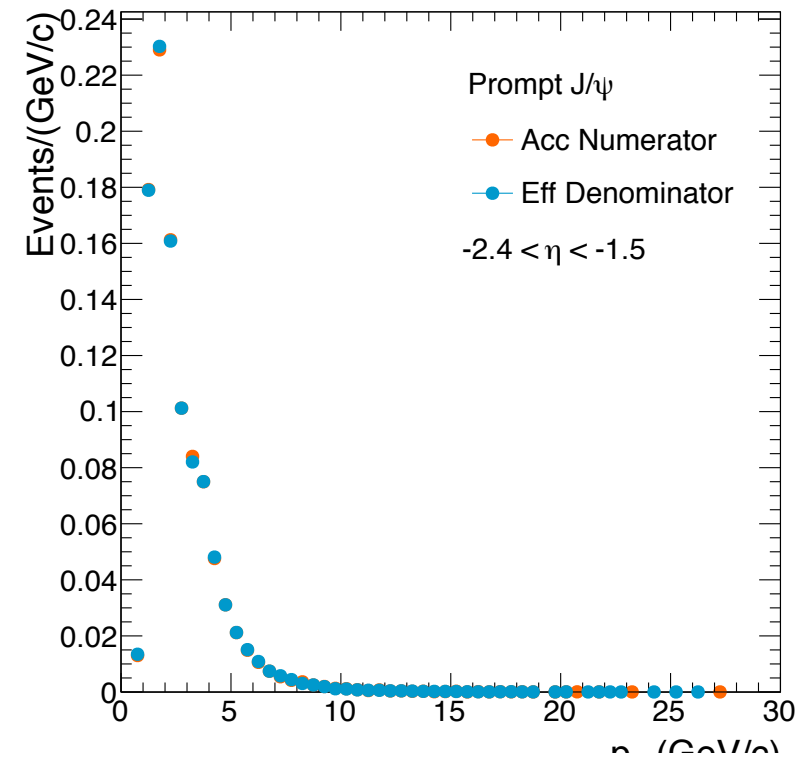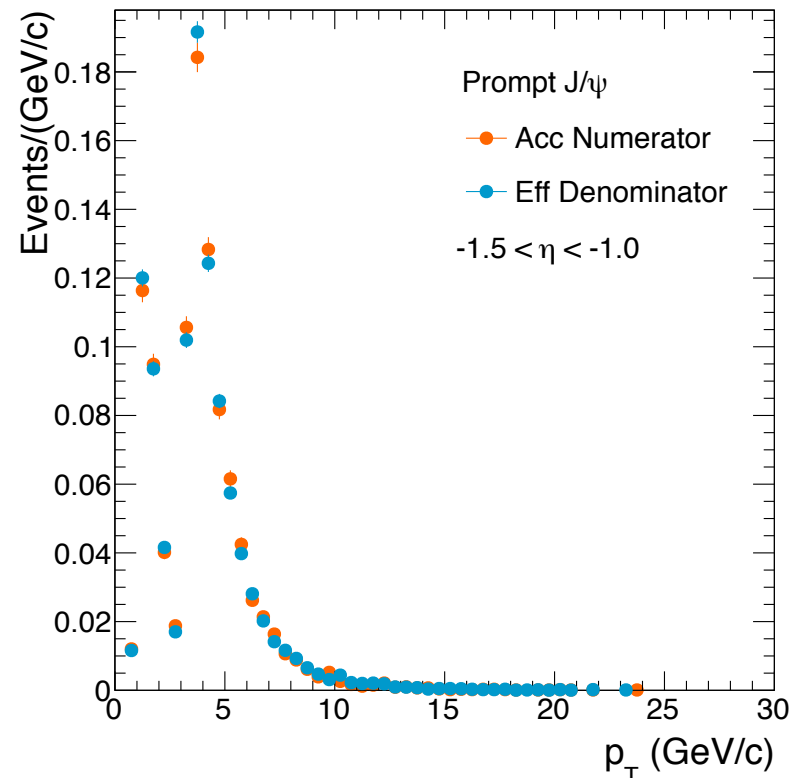
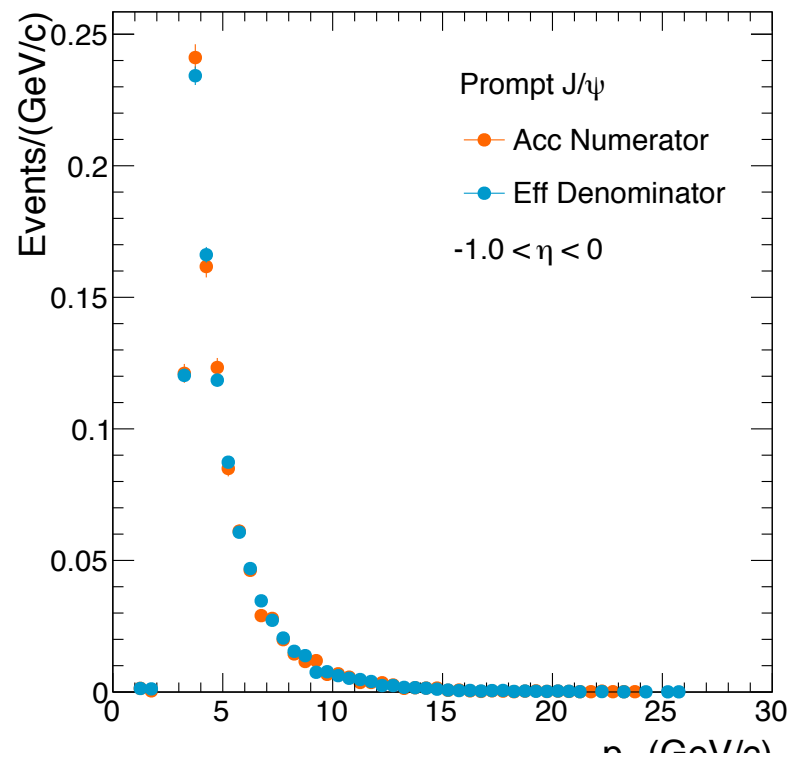


⊕ mass

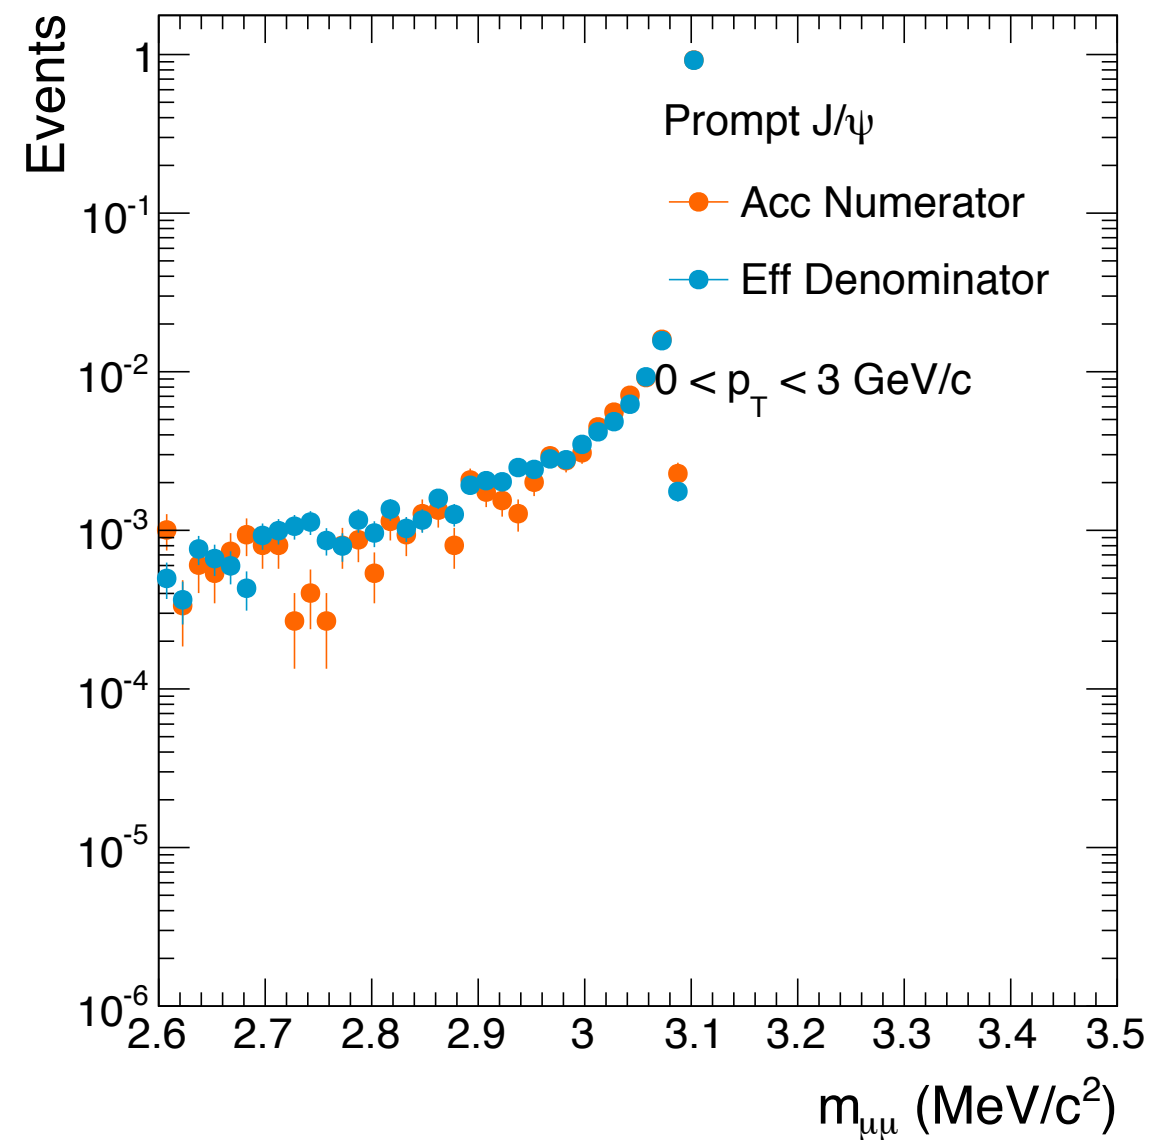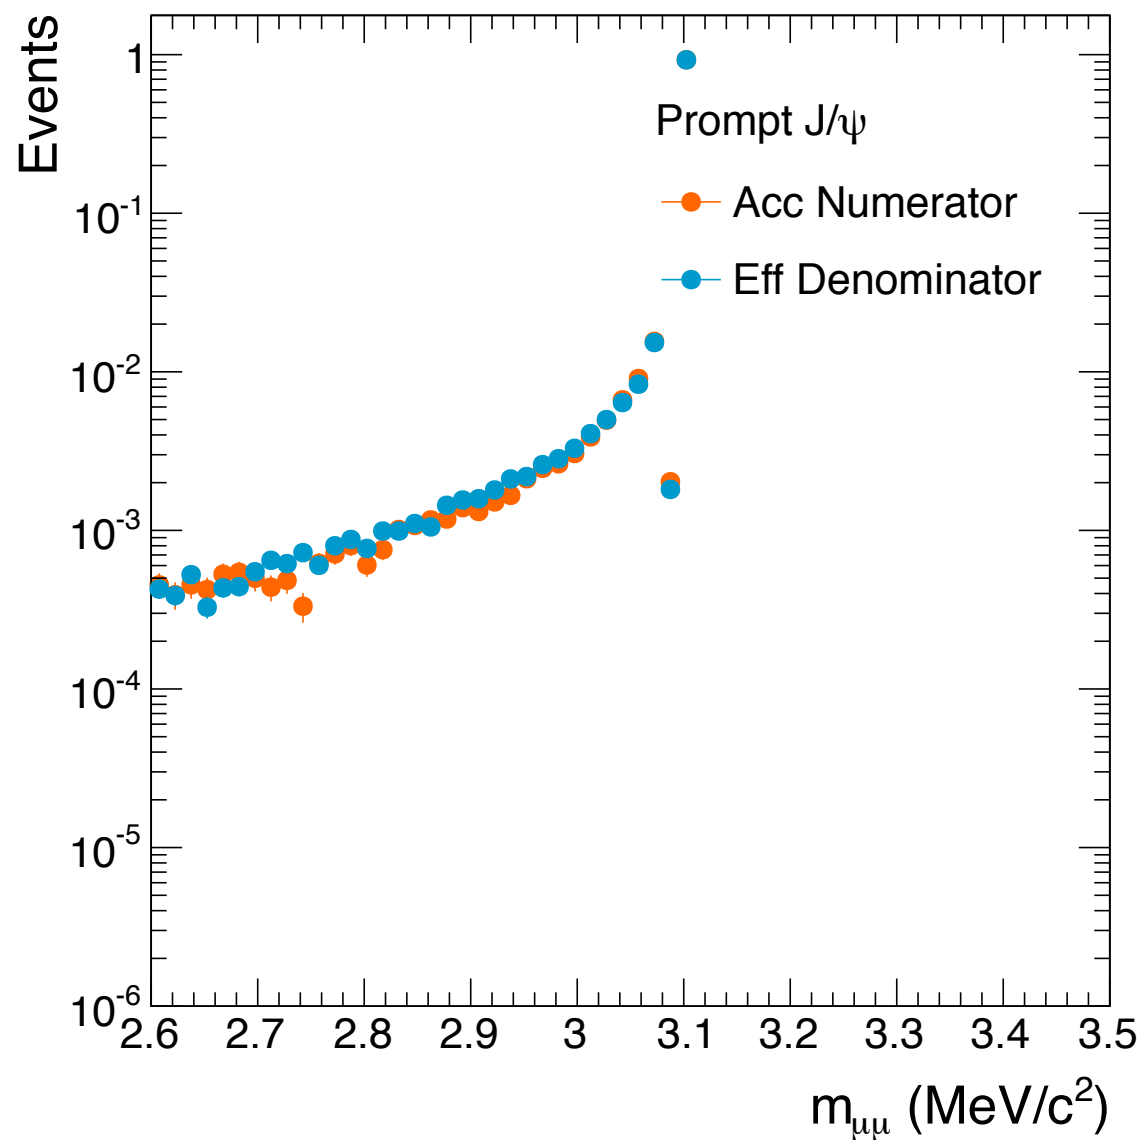


⊗ Eff Den


⊗ Eff Num

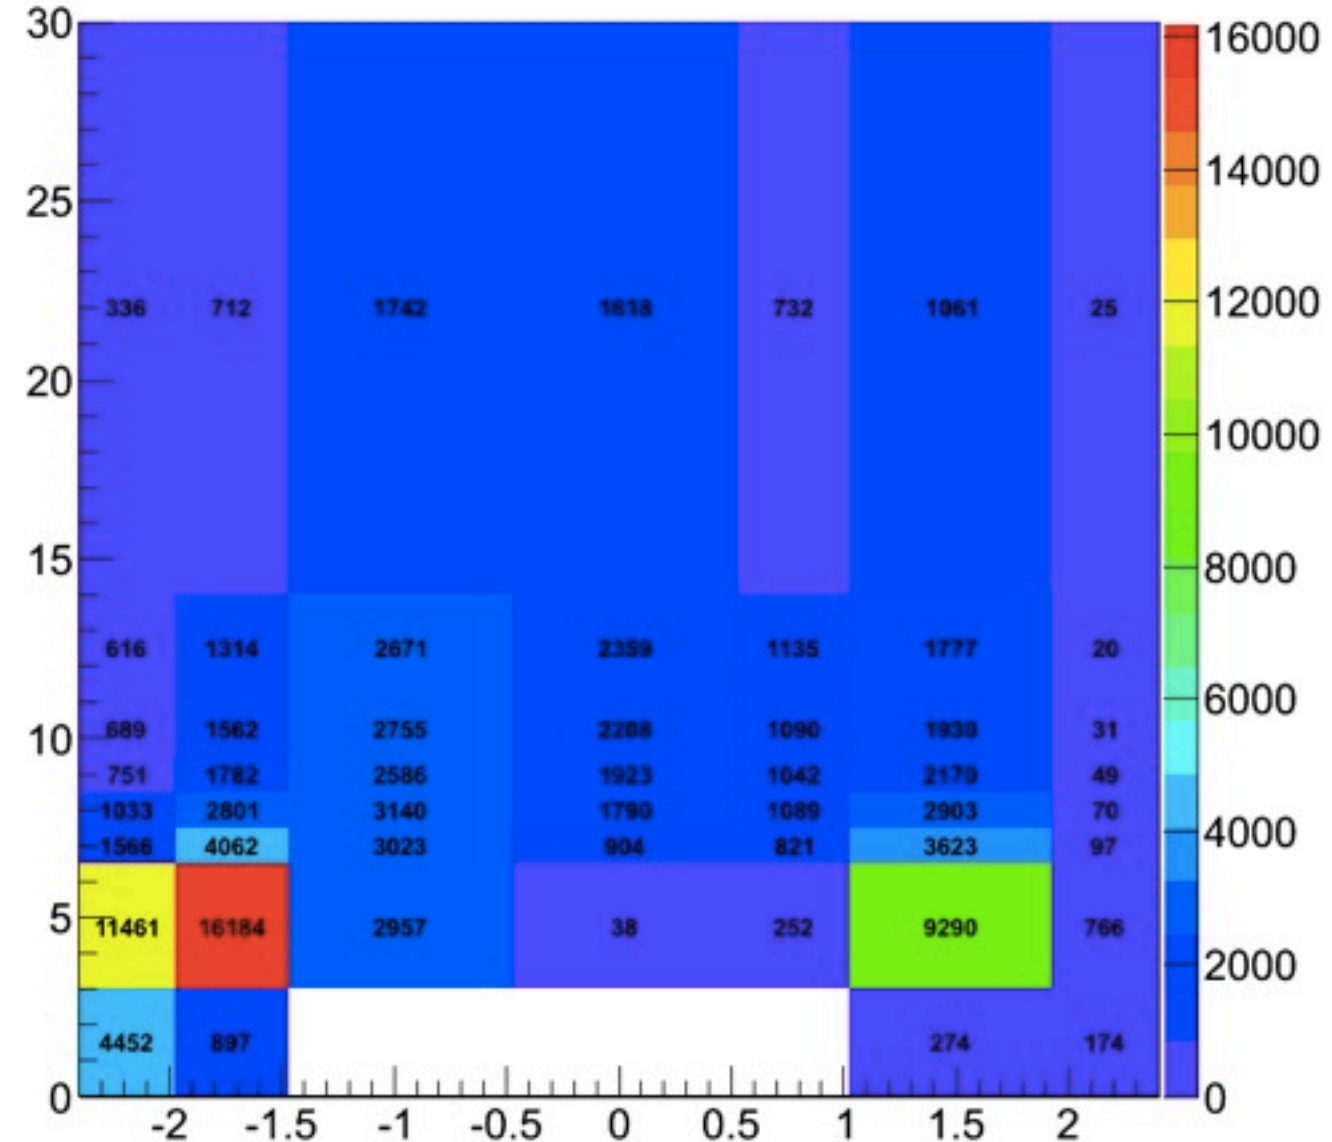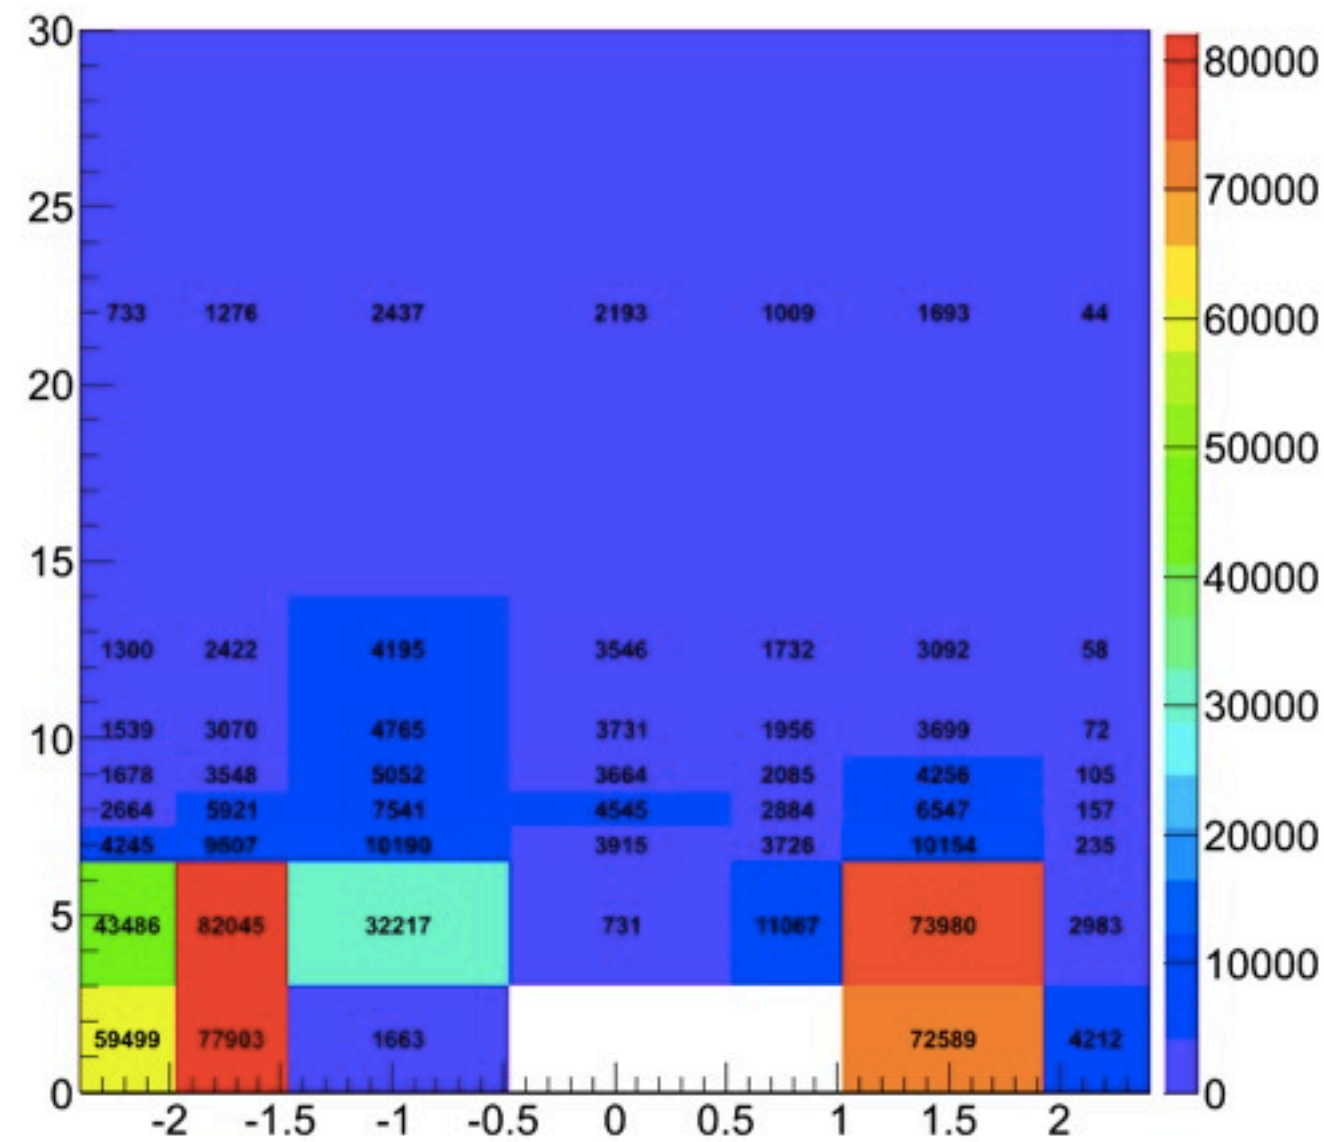

Efficiency


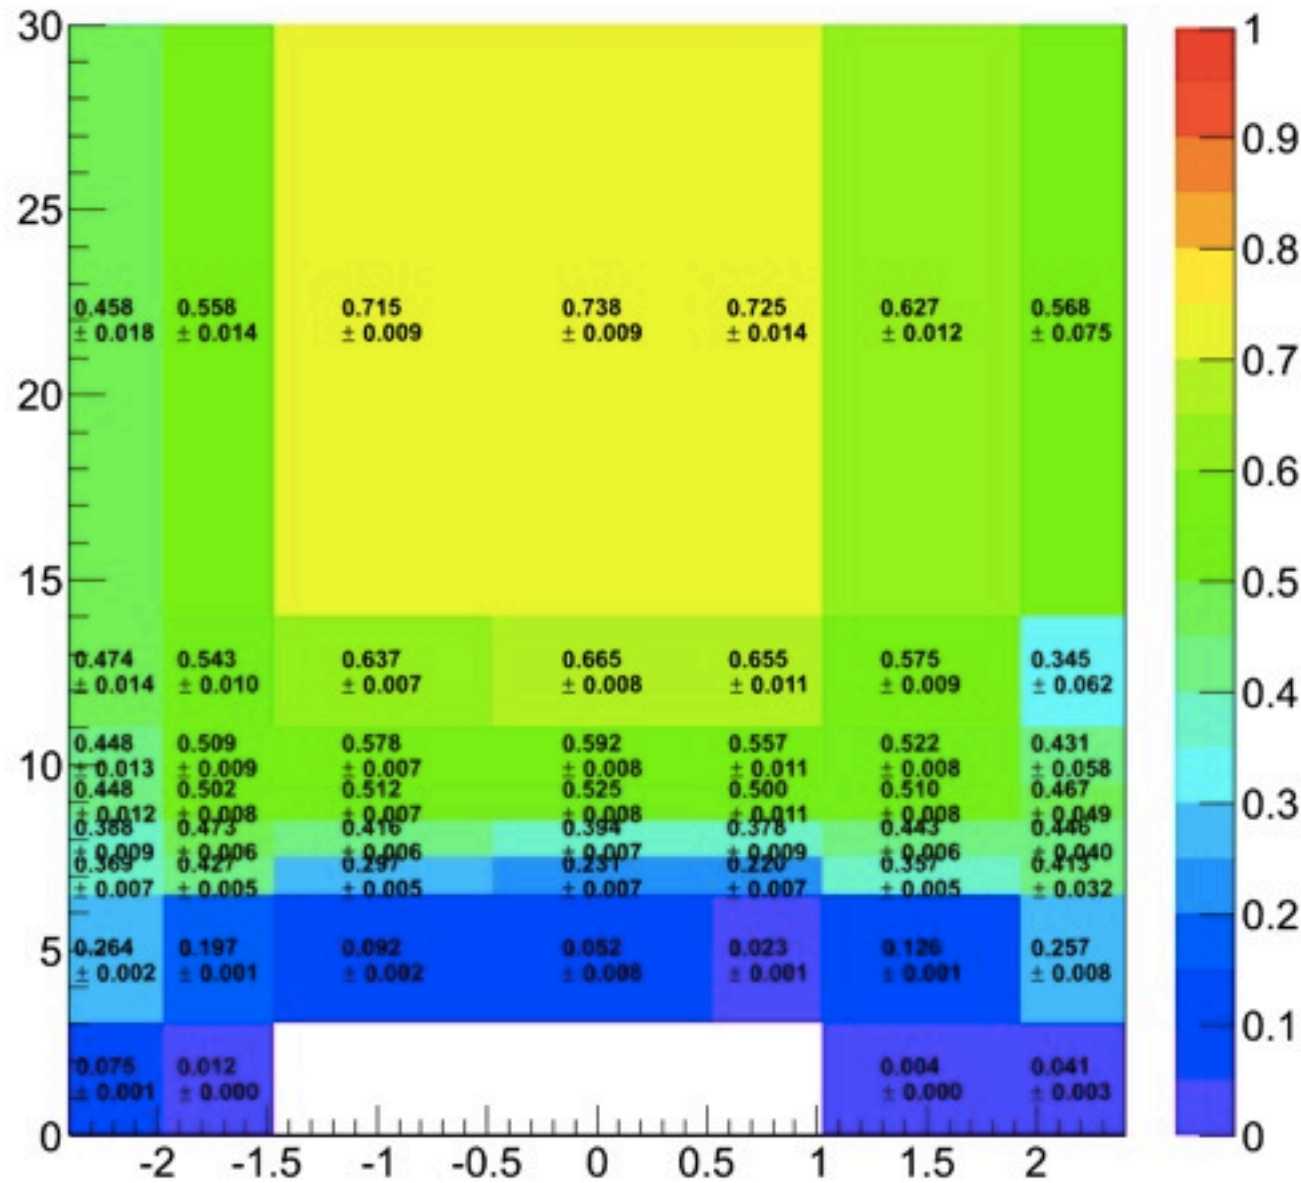


zoomed in

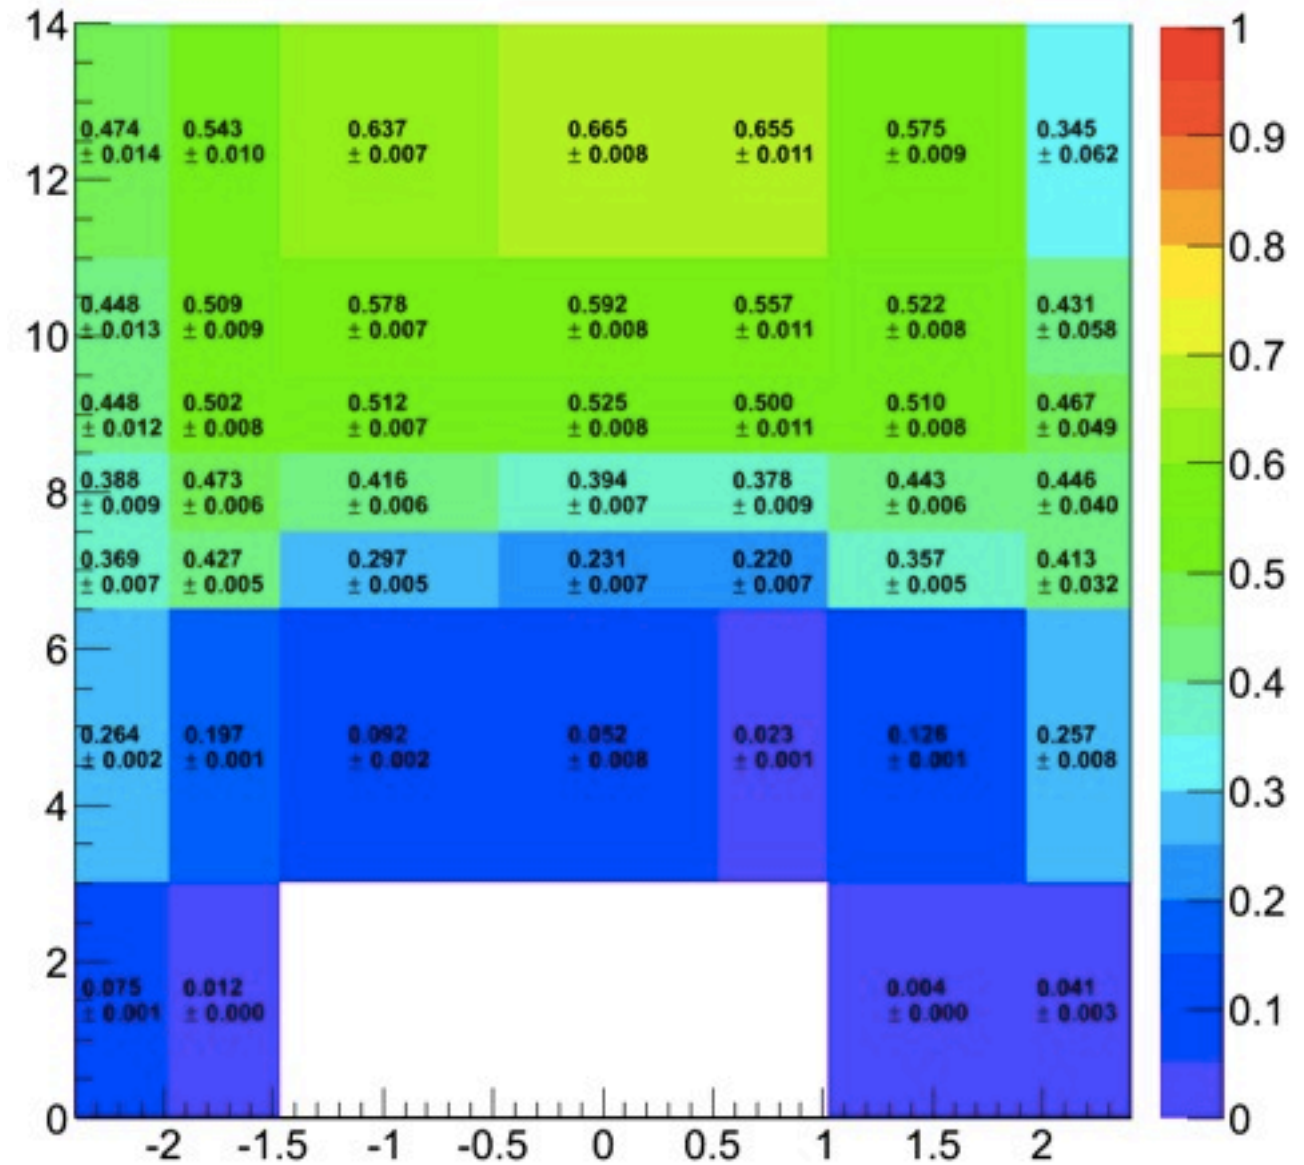


Eff Den


Eff Num

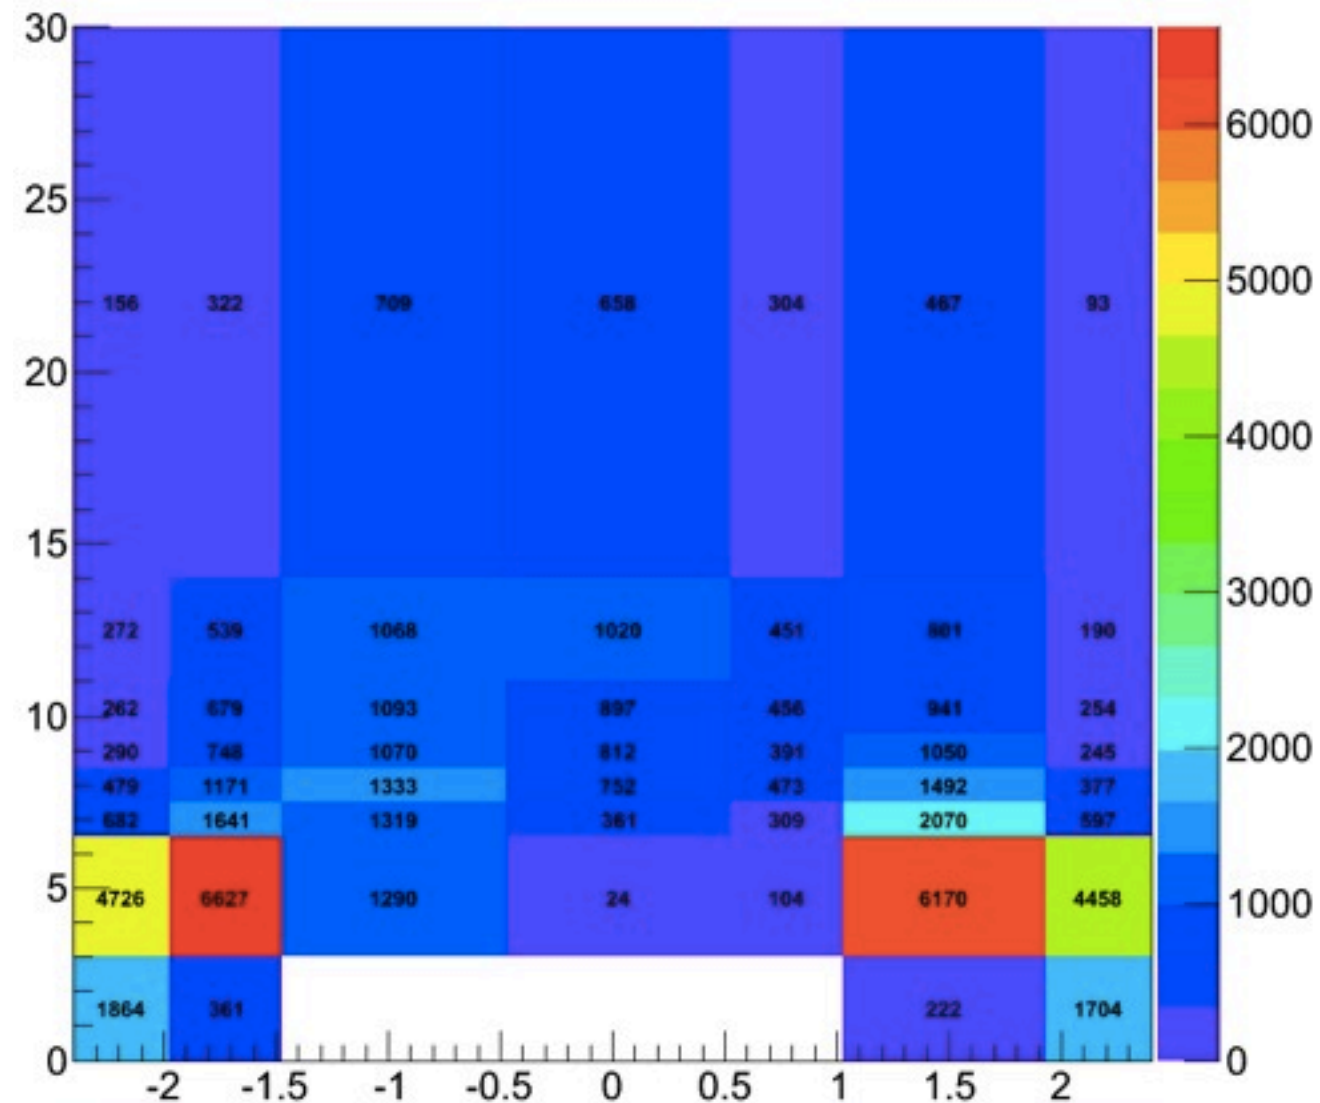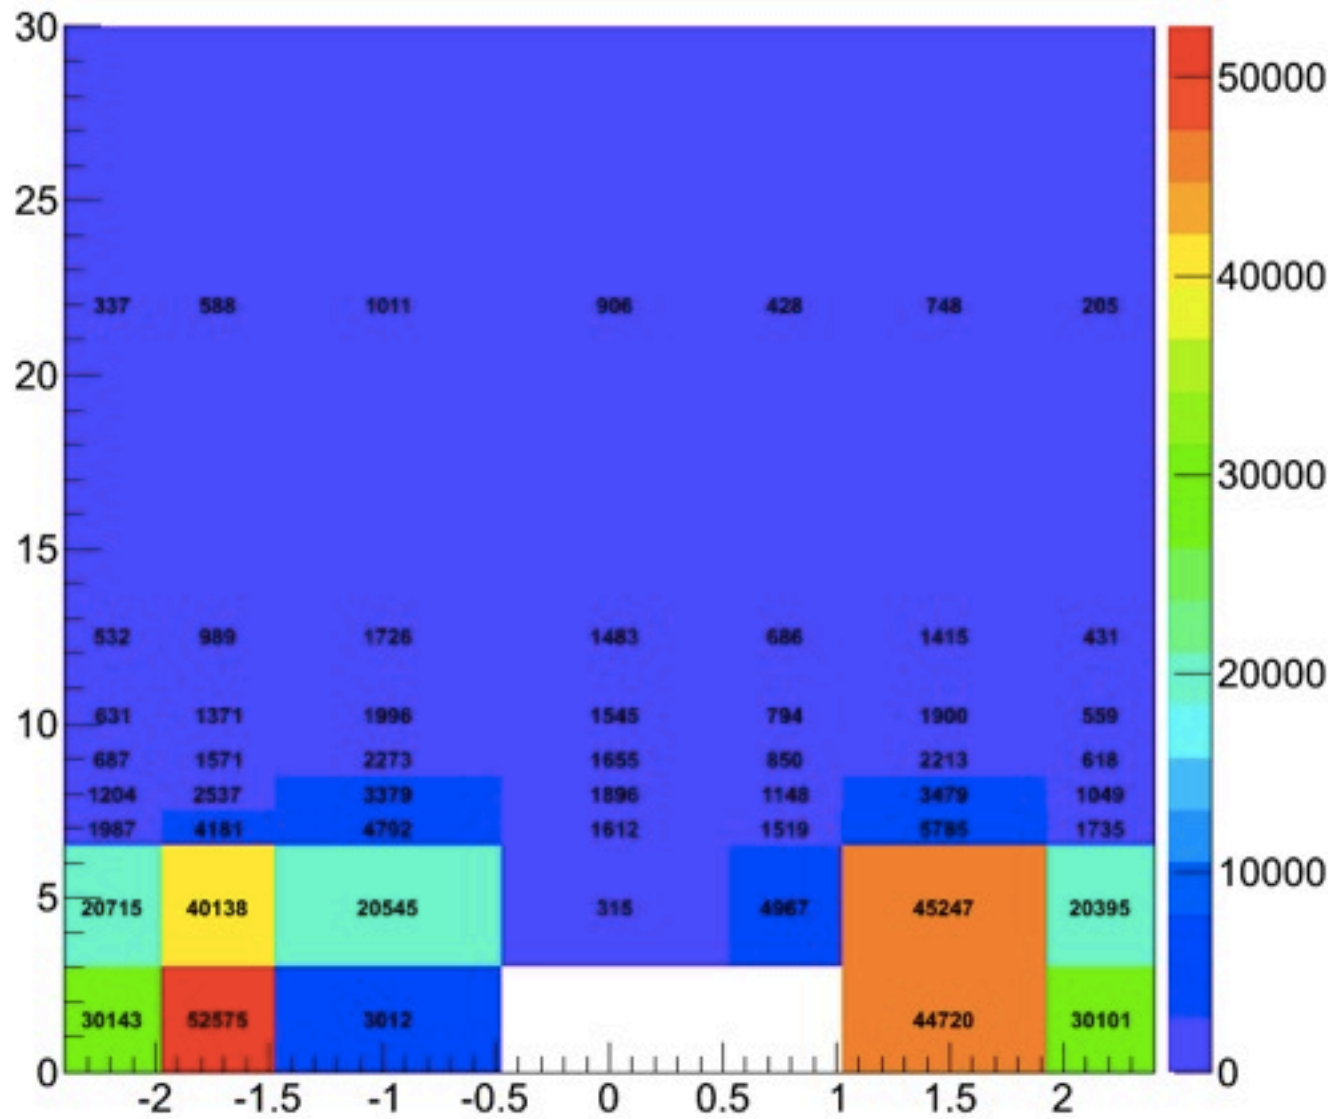

Efficiency

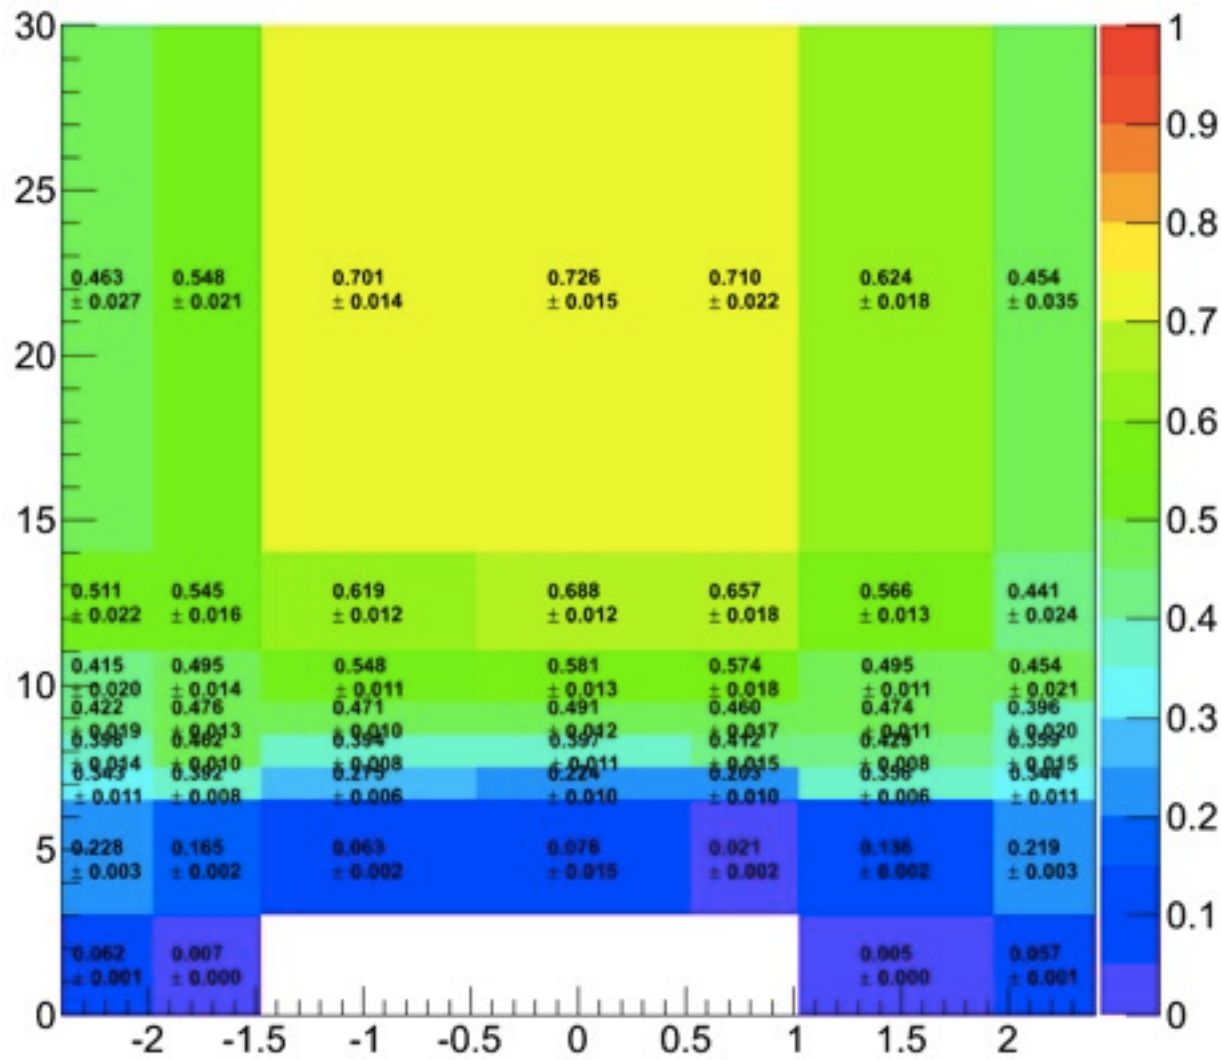

zoomed in

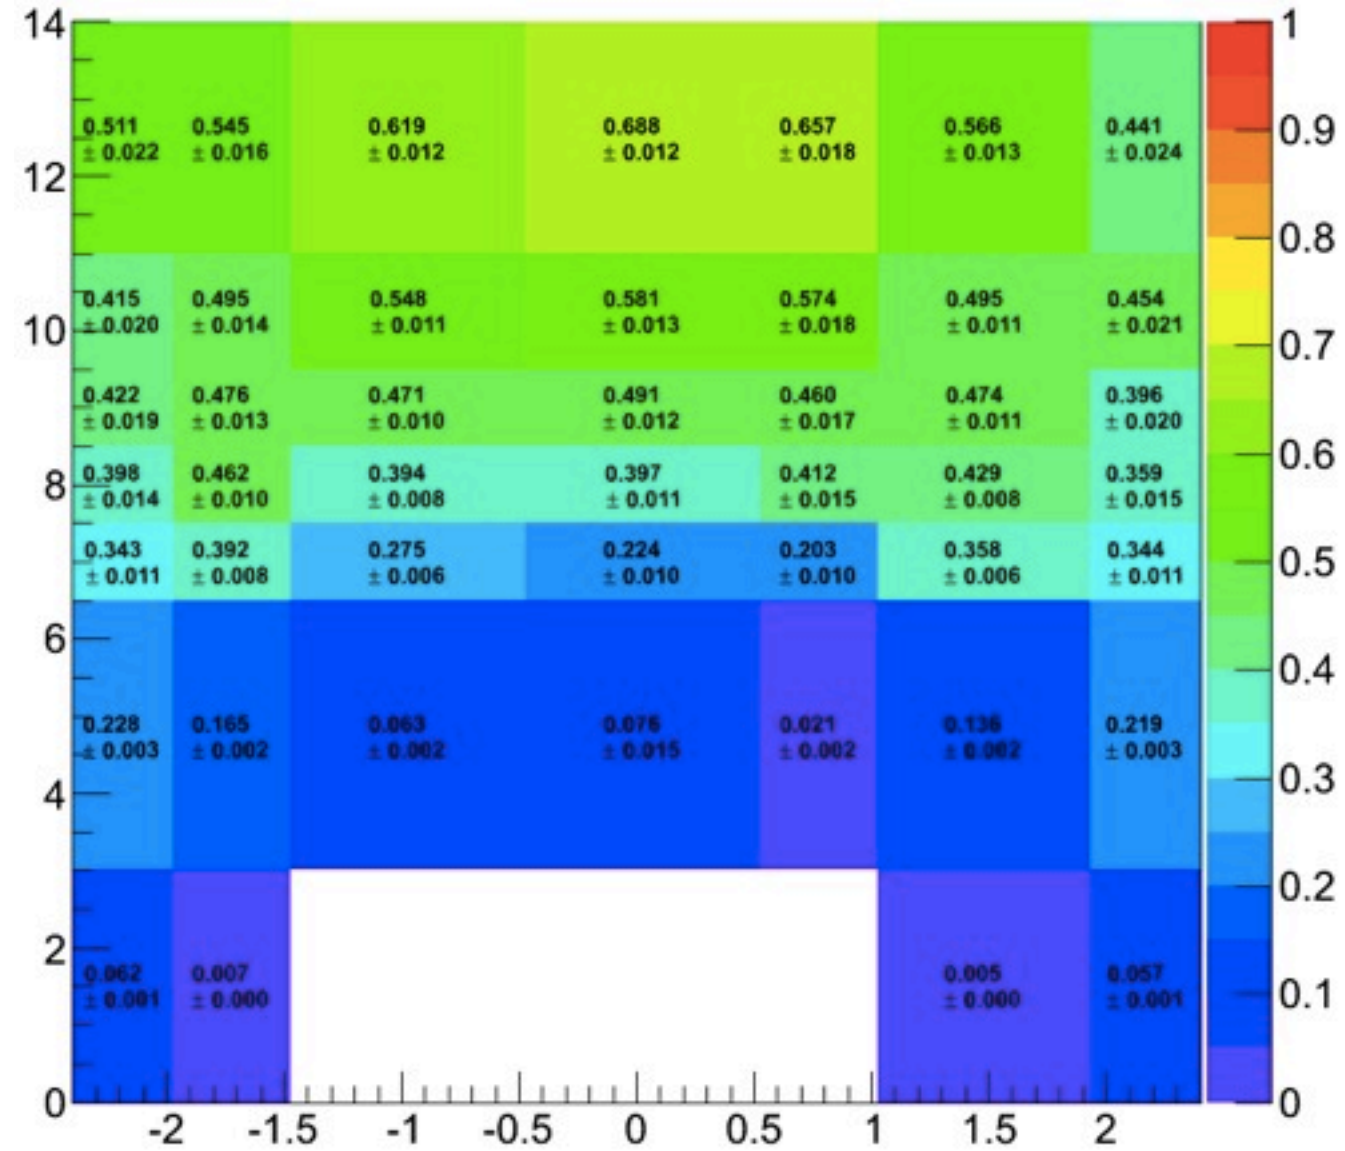



⊕ old sample

0,1,2,3,4,5,6.5 GeV/c

Entries = 8237319

⊕ Eff Den

⊕ Eff Num

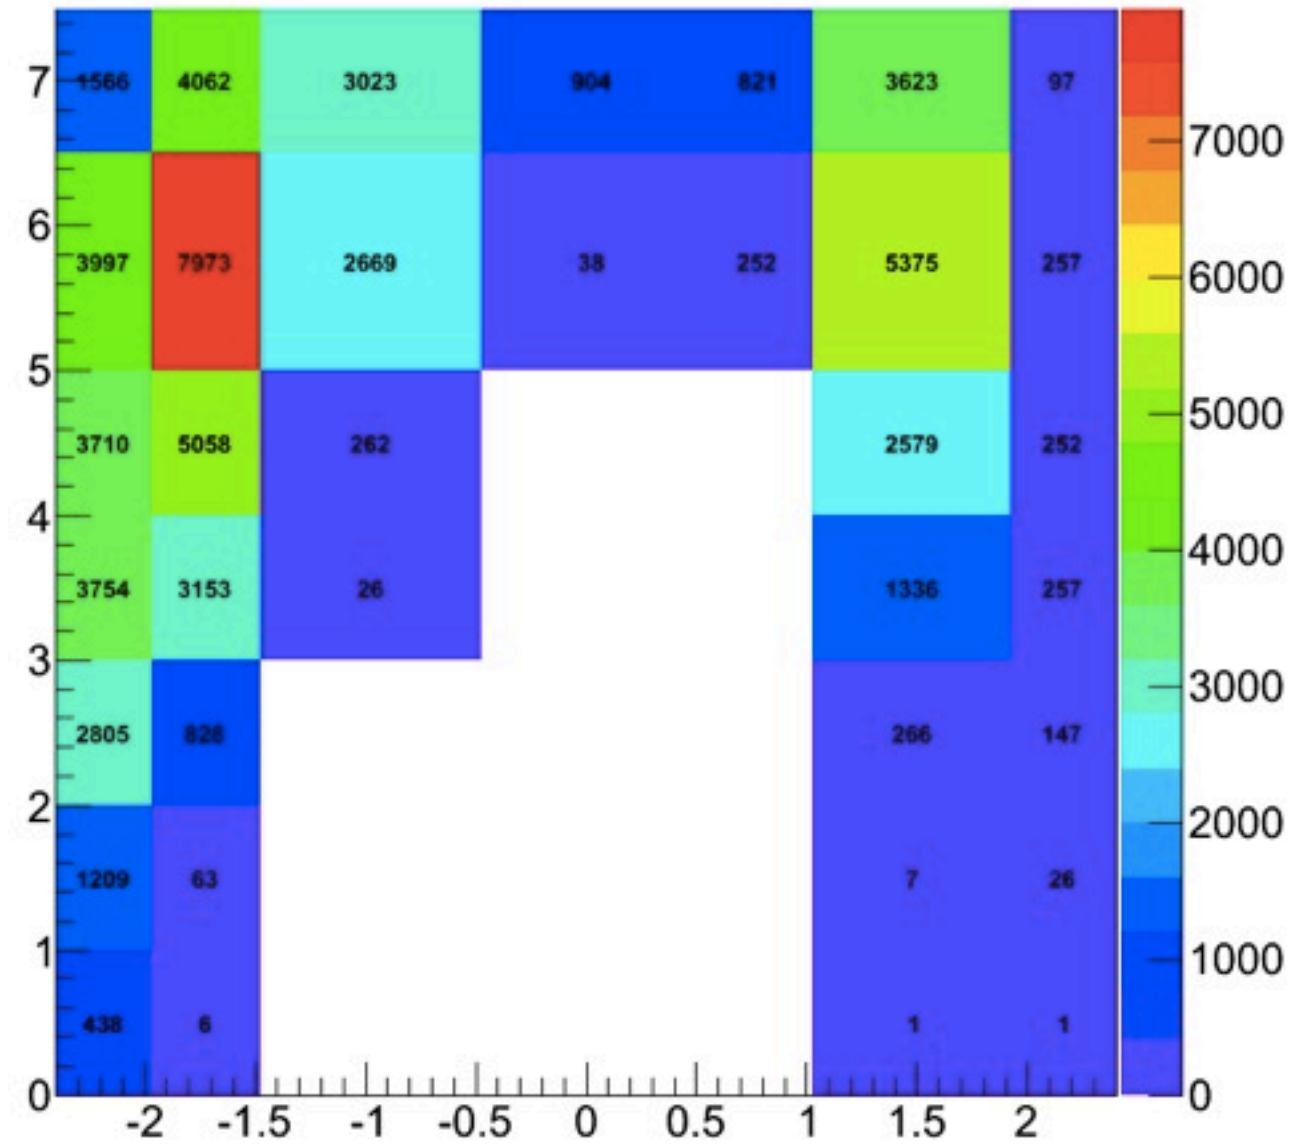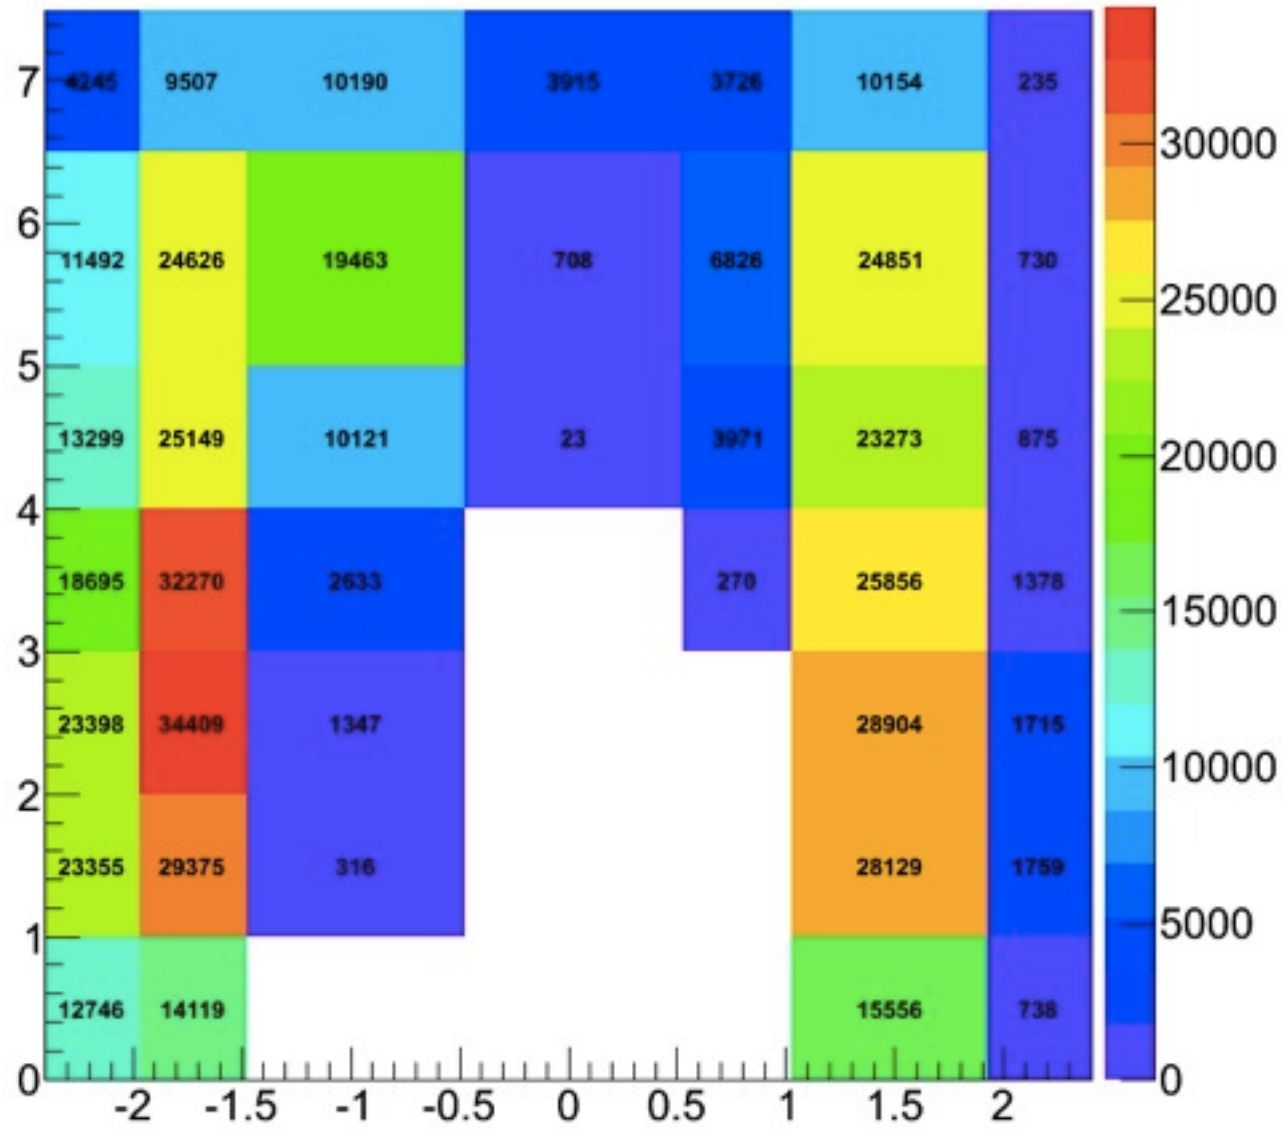


⊕ old sample

0,1,2,3,4,5,6.5 GeV/c

Entries = 8237319

⊕ Efficiency

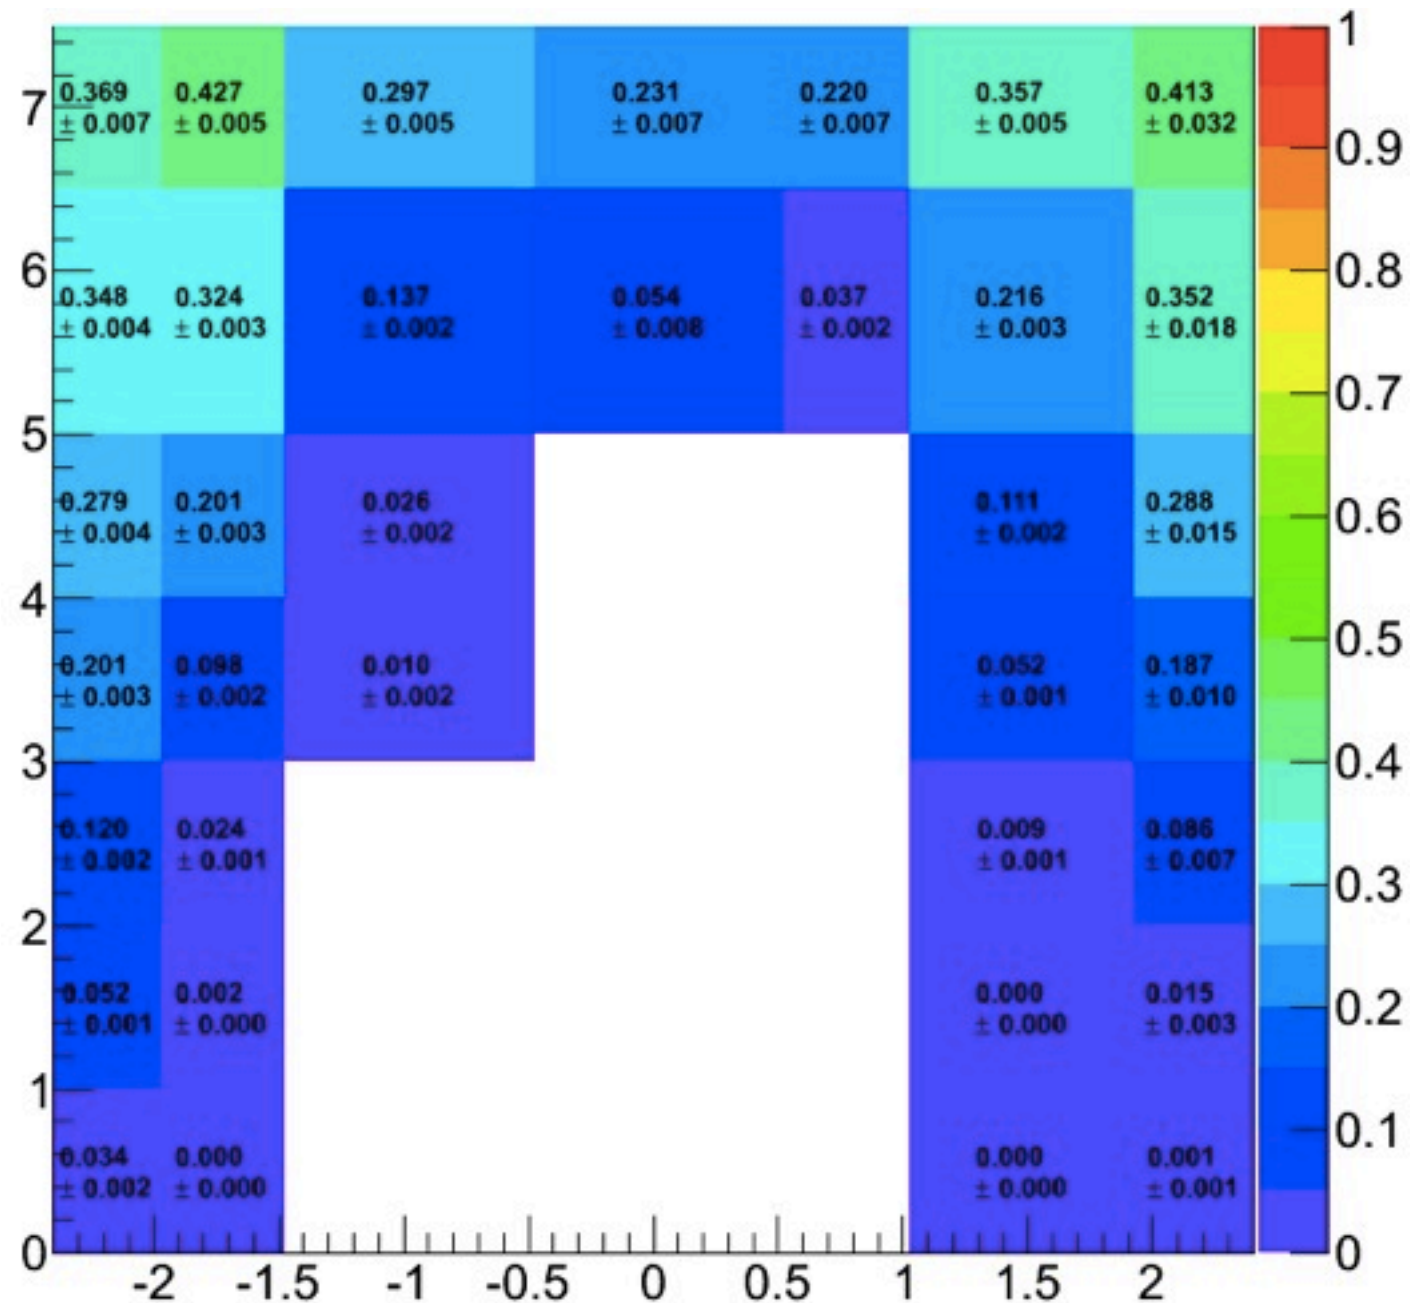


⊕ **New sample**


0,1,2,3,4,5,6.5 GeV/c

Entries = 8237319

⊕ **Eff Den**

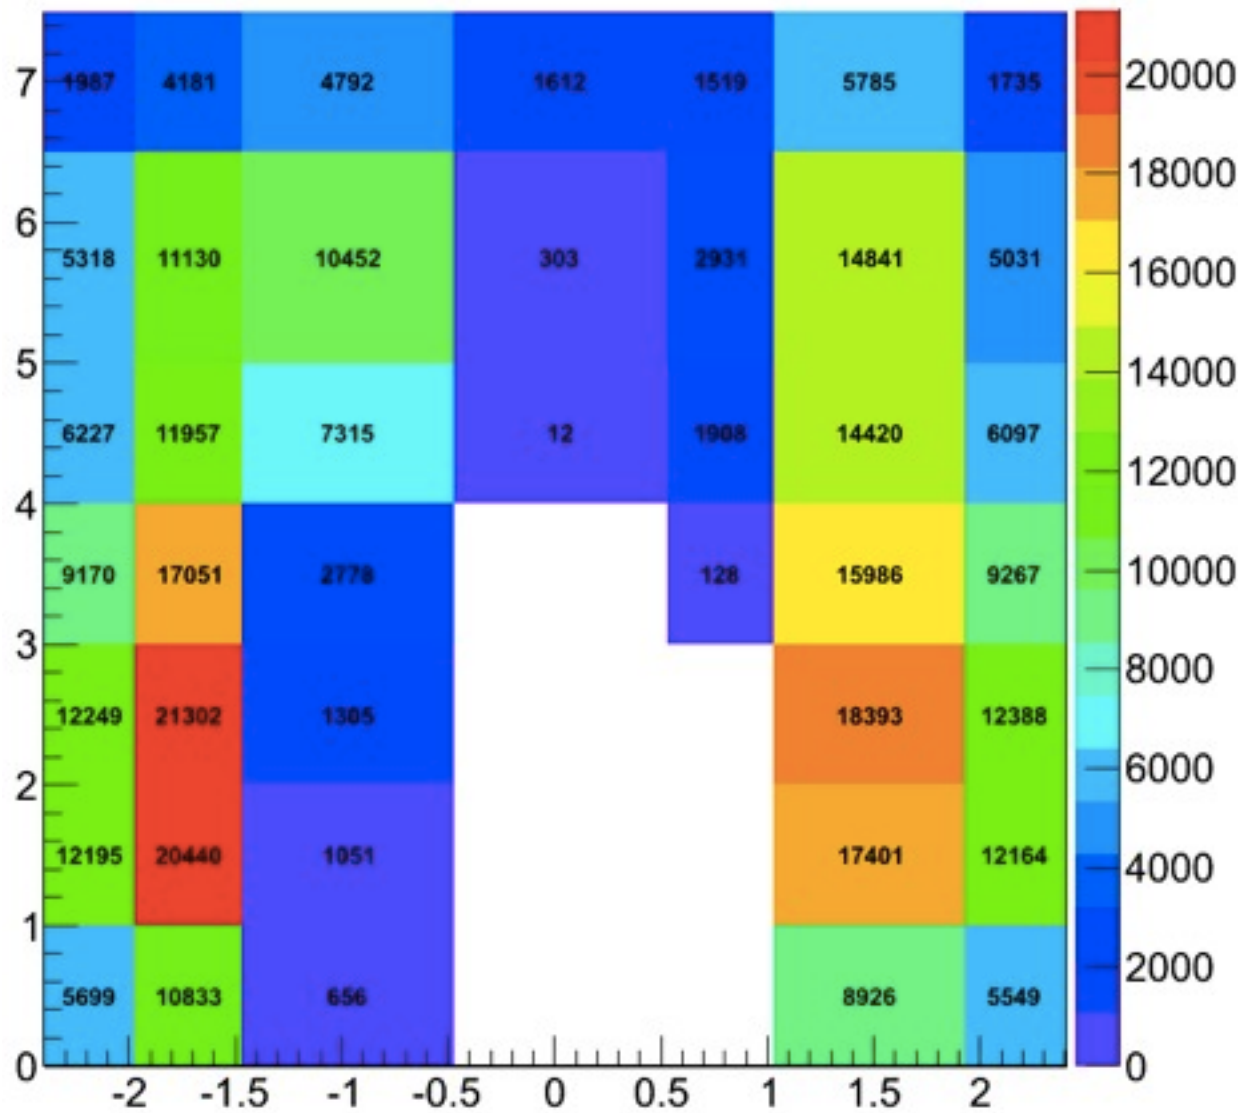

⊕ **Eff Num**

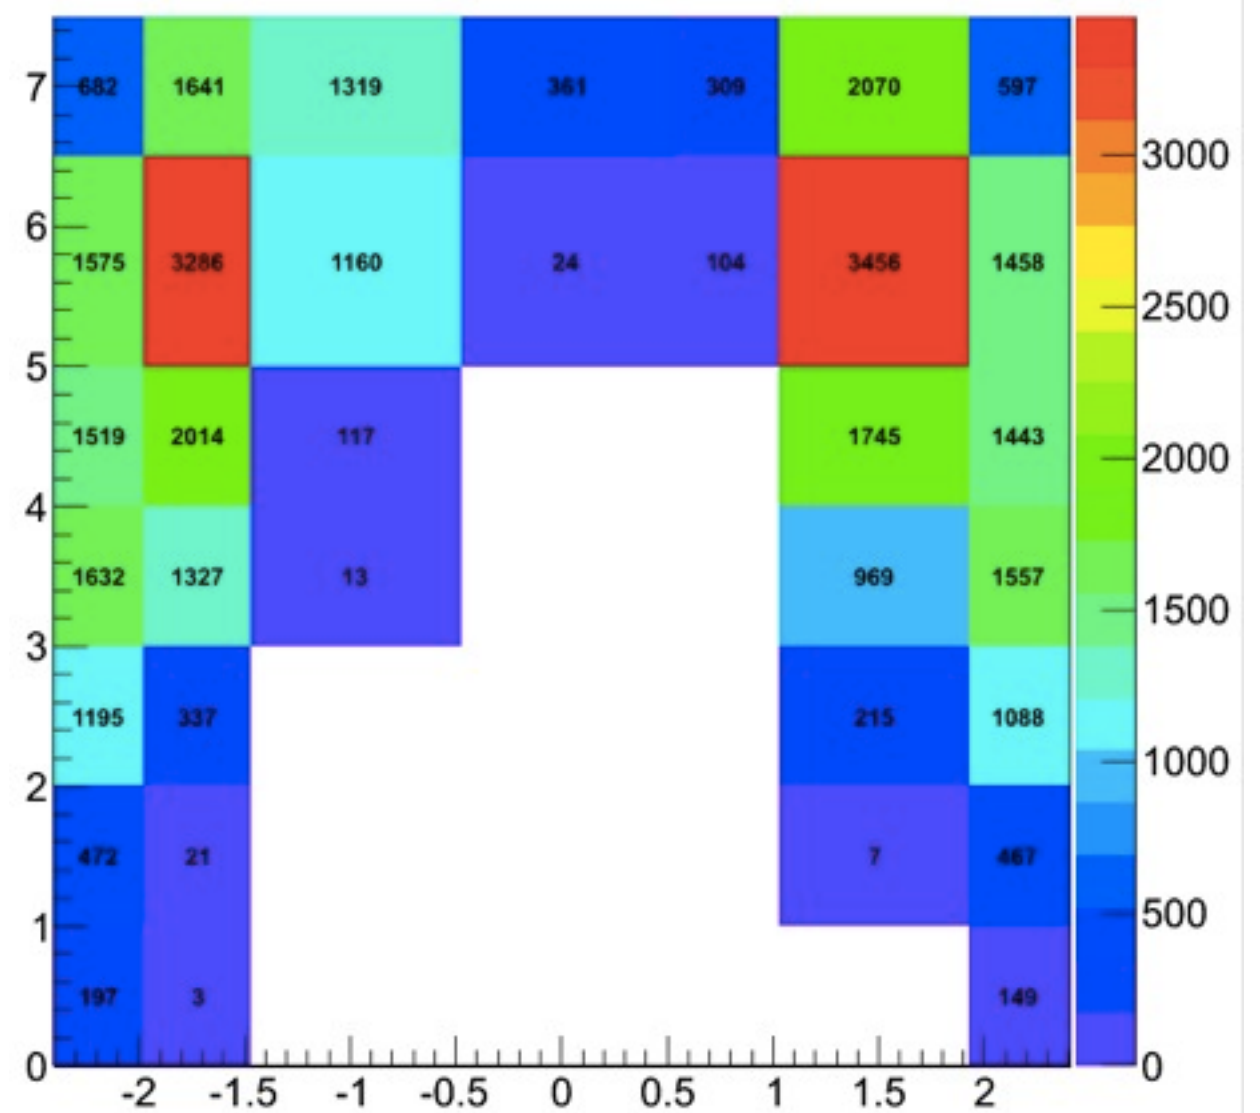


① New sample

0,1,2,3,4,5,6.5 GeV/c

Entries = 8237319

① Efficiency



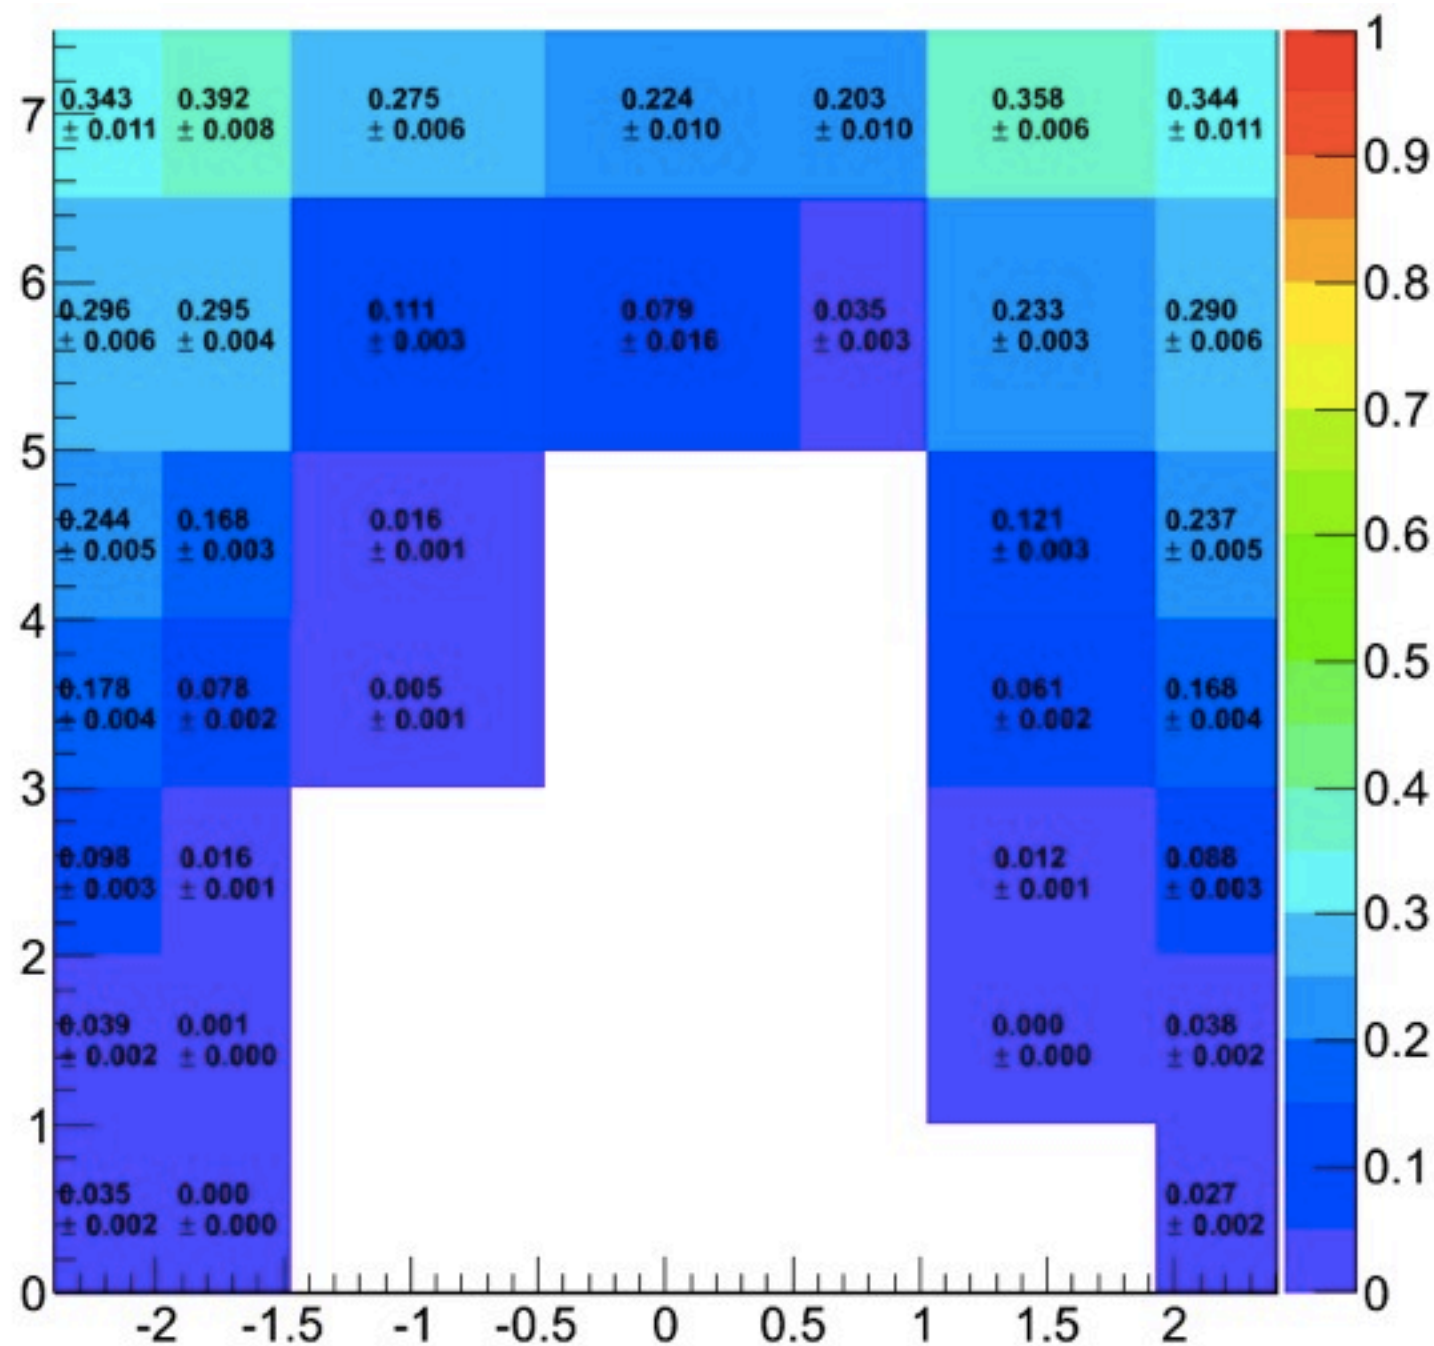




Back up

⊕ pp boosted sample

- prompt J/psi sample is done (~1M events)
 - quick check for the efficiency values
 - No improvement at low p_T ??
 - further confirmation before discussing in dilepton meeting

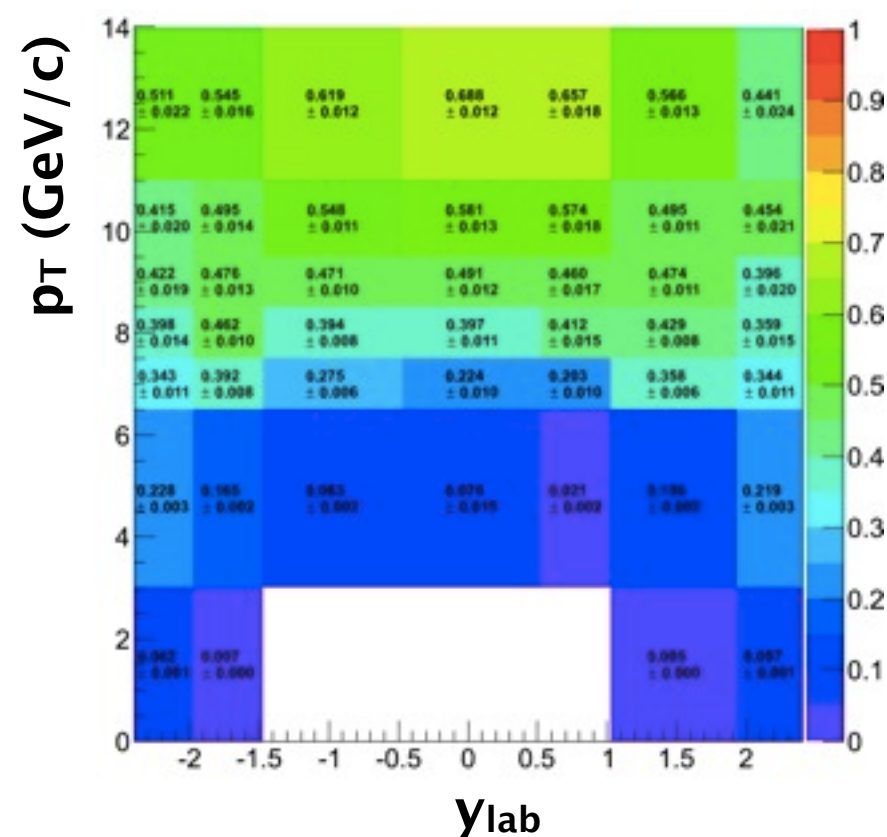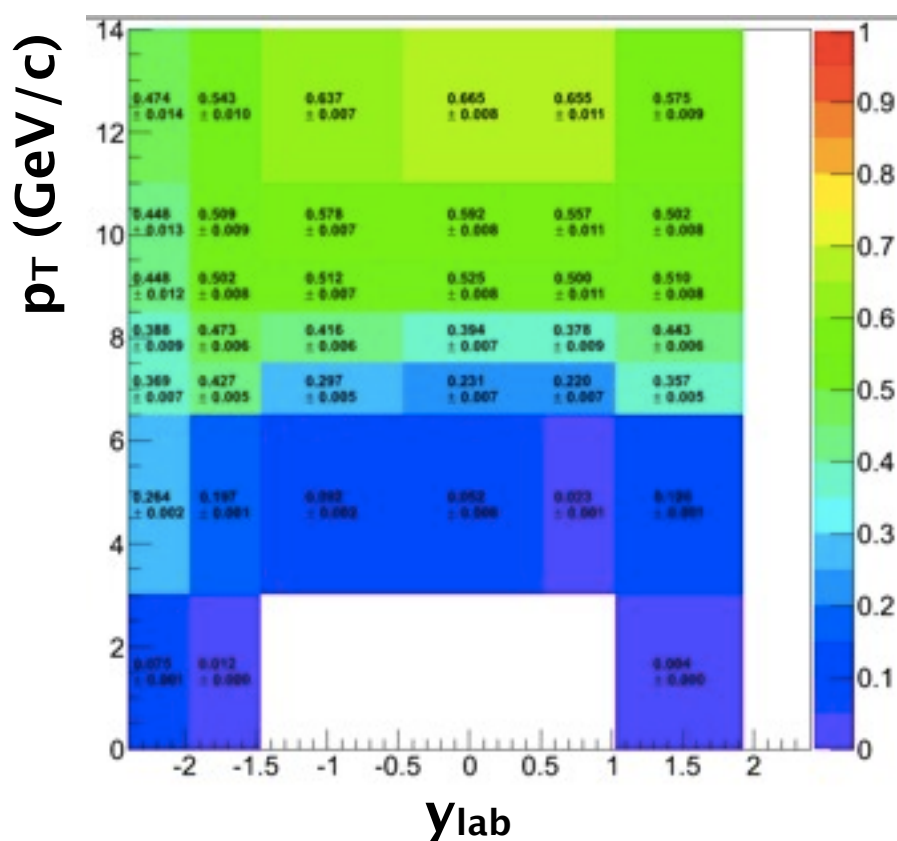

⊕ HIJING embedding sample


- Test has been done in local machine
- fixing the minor problems when running crab job

Double differential cross section


- LHCb points plotted at the center of the bin
- Our points plotted at $\langle p_T \rangle$

$$\frac{d^2\sigma}{dp_T dy} = \frac{N_{fit}^{J/\psi} / (A \cdot \epsilon)}{L_{int} \times B(J/\psi \rightarrow \mu^+ \mu^-) \times \Delta p_T \Delta y}$$

[Prompt]

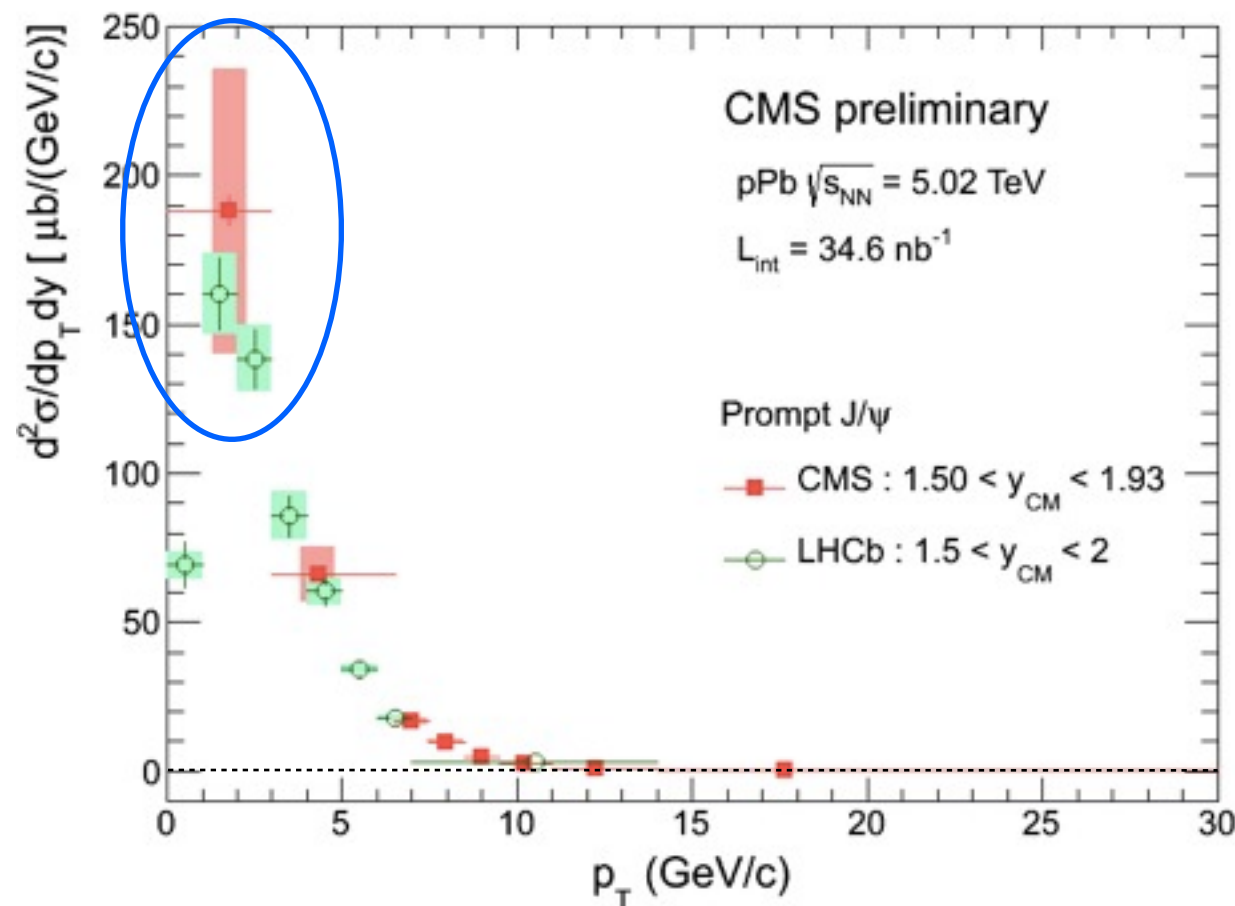

[Non-prompt]

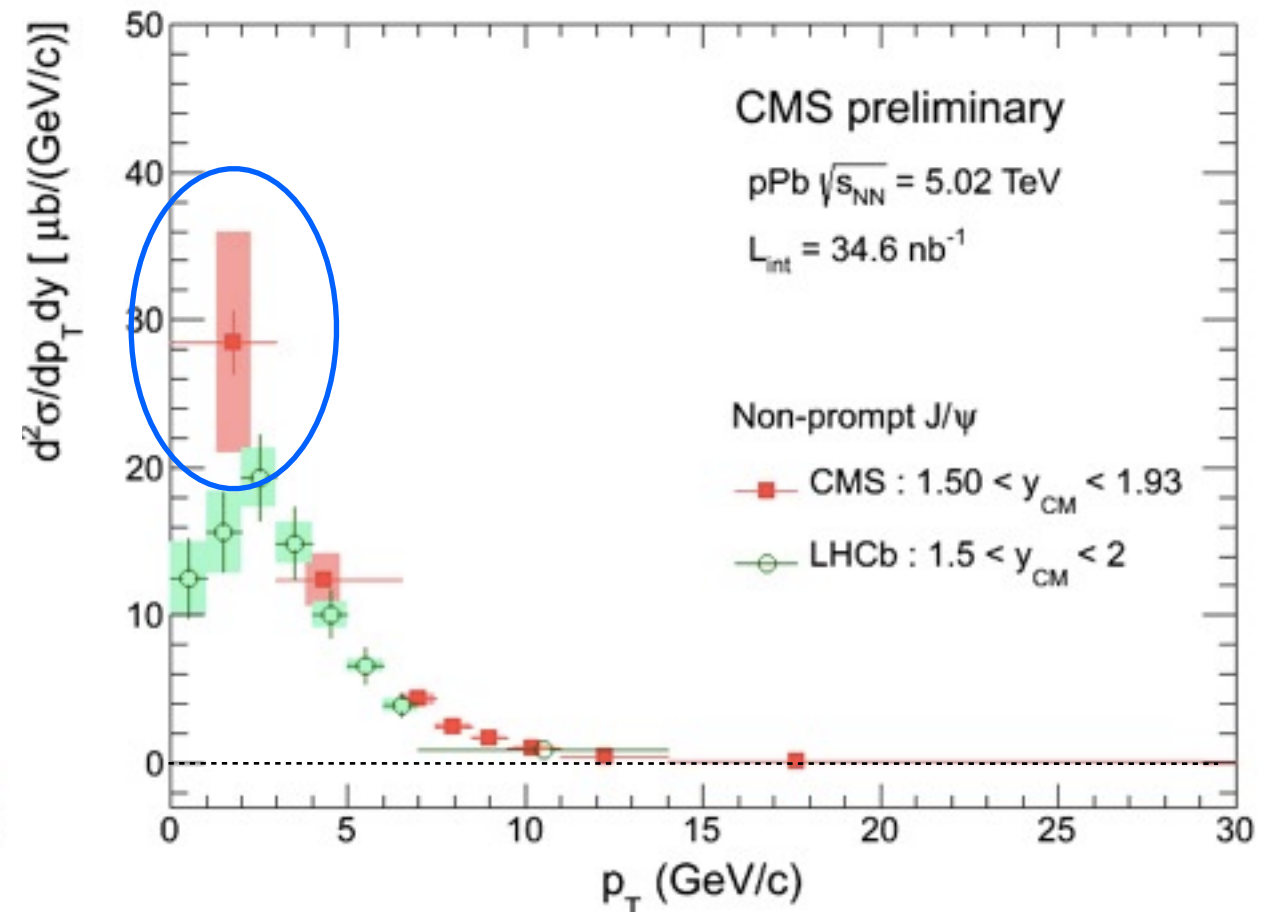

- Large discrepancies at lower $p_T < 3 \text{ GeV/c}$
 - acceptance or efficiency underestimated?

Definition of acceptance and efficiency

- Acceptance** : 1) a sample produced with the same configuration setting as the official, but MuMuGen Filter (kinematic filter for single muons) were removed.

$$\alpha = \frac{N_{reconstructible, M1}^{dimuon}(p_T, y)}{N_{generated}^{dimuon}(p_T, y)}$$

← **Acc. numerator(GEN)**
M1 + acc.cut

- Efficiency** : 2) centrally produced official sample (with MuMuGen Filter).

$$\varepsilon = \frac{N_{detectable}^{dimuons\ reconstructed, M2, muIDcut, triggerselection}(p_T, y)}{N_{detectable}^{dimuon\ generated, M1}(p_T, y)}$$

← **Eff. denominator(GEN)**
M1 + acc.cut + filter

● M1

$$2.6 < m_{\mu\mu} < 3.5 \text{ GeV}/c^2$$

● acceptance cut

(detectable/reconstructable)

$$-2.4 < \eta < 1.93$$

$$|\eta^\mu| < 1.3 \rightarrow p_T^\mu > 3.3 \text{ GeV}/c$$

$$1.3 < |\eta^\mu| < 2.2 \rightarrow p_T^\mu > 2.9 \text{ GeV}/c$$

$$2.2 < |\eta^\mu| < 2.4 \rightarrow p_T^\mu > 0.8 \text{ GeV}/c$$

● MuMuGen filter

$$1) -2.5 < \eta^\mu < 2.5$$

$$2) p_T^\mu > 2.5$$

(configuration in backup)

- MuMuGen Filter should be looser than the acceptance cut, and “denominator of efficiency” should be same with “numerator of acceptance”.**