




Performance of New Sampling Calorimeter in the KOTO Experiment

김준이, 이종원, 안정근(고려대), 김은주(전
북대), 임계엽(KEK)

for the KOTO Collaboration 2017 KPS
Fall Meeting


J-PARC KOTO Experiment

- $\text{Br}(\text{K}_L \rightarrow \pi^0 \nu \bar{\nu}) = (2.8 \pm 0.4) \times 10^{-11}$ predicted by SM
- FCNC process in Standard model (Suppressed)
- Clean mode to explore the New Physics

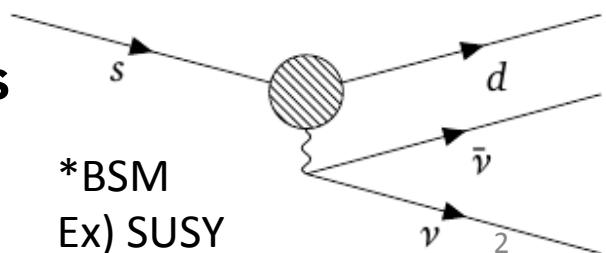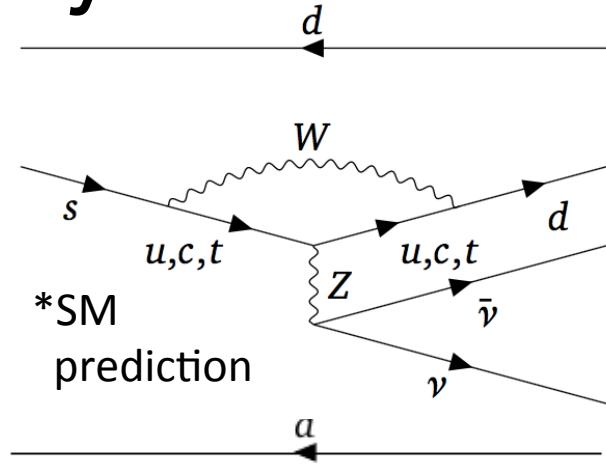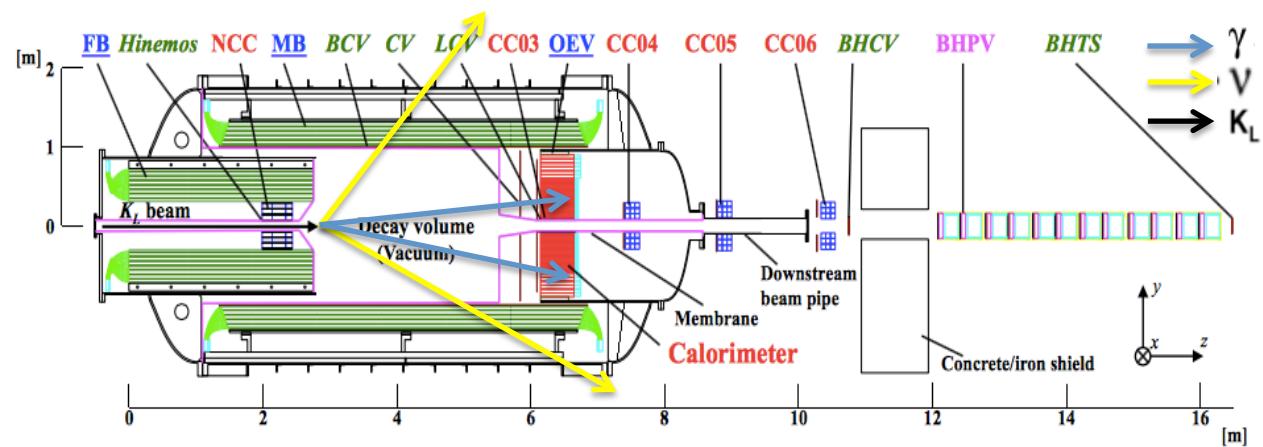



CsI Calorimeter and Hermetic Veto Counters

New Pb/Scint Calorimeter

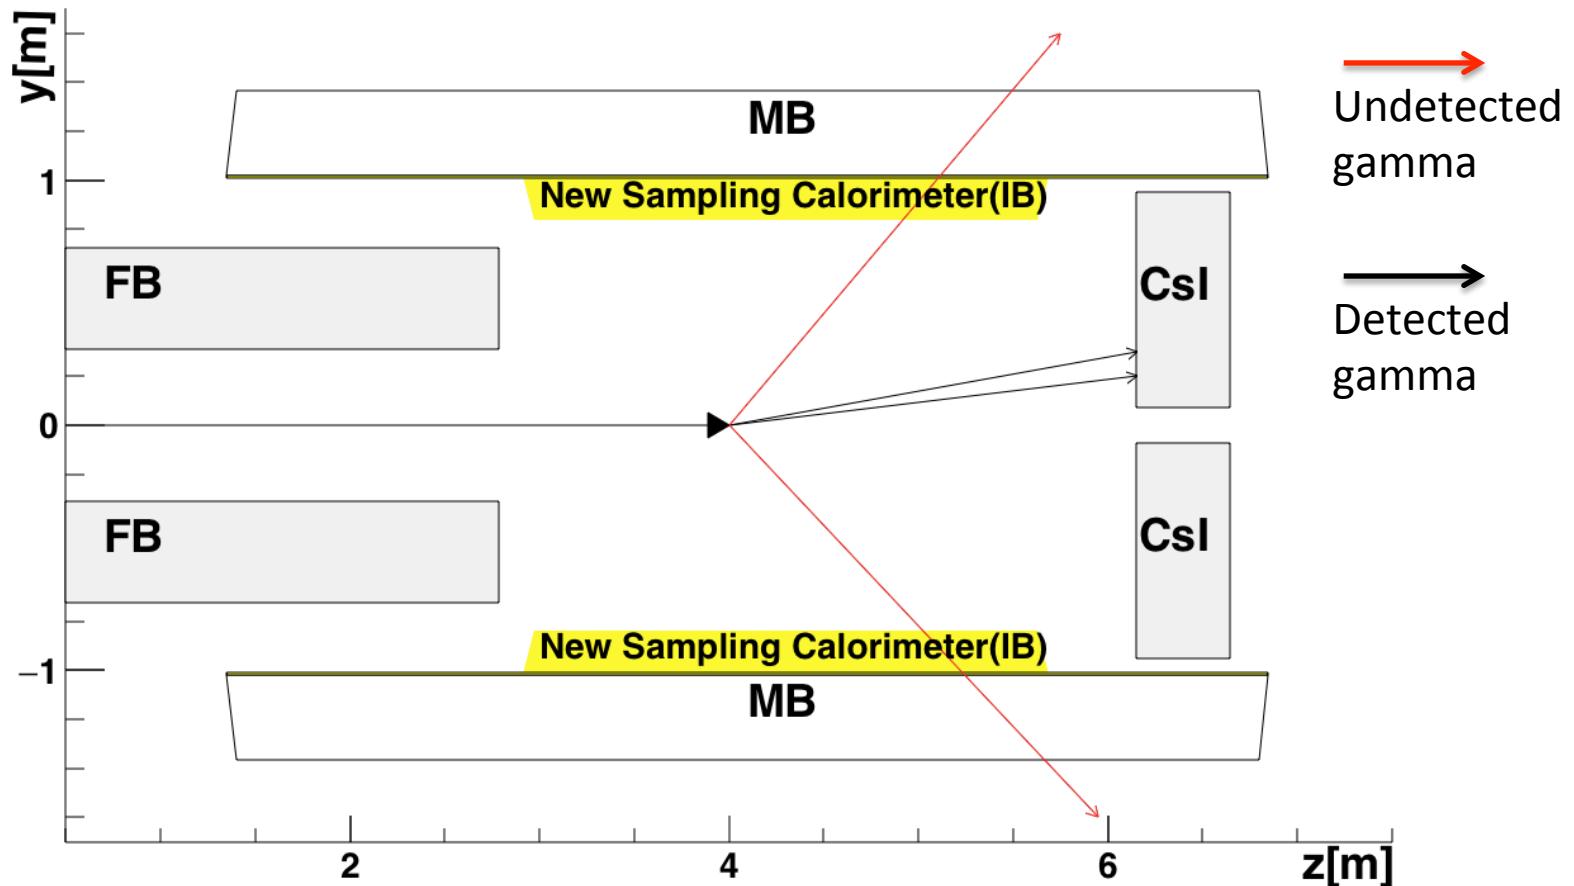


- Main source of the background is detection inefficiency of the sampling calorimeter(MB)
- New sampling calorimeter will reduce the background events as factor of $2.96/0.46$



Inner Barrel

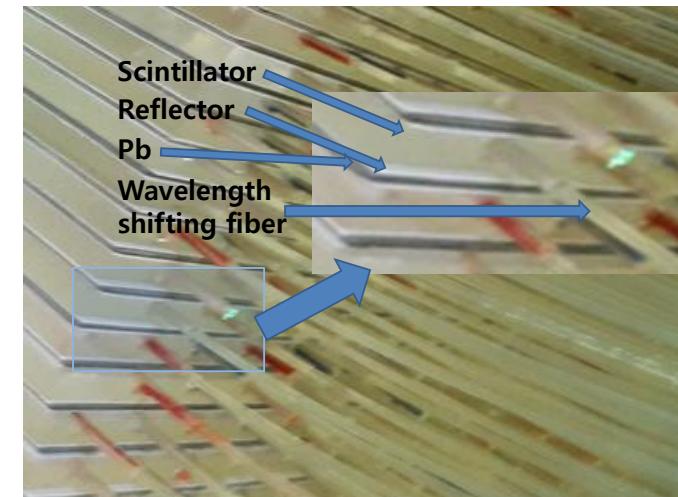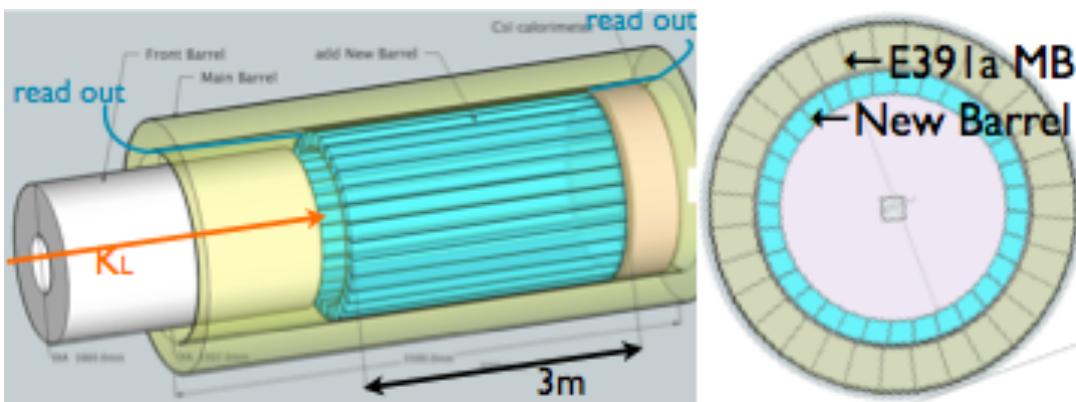

- 25 layers of 1-mm thick Pb sheet and 5-mm thick plastic scintillator
- Add $5X_0$ to $13.5X_0$

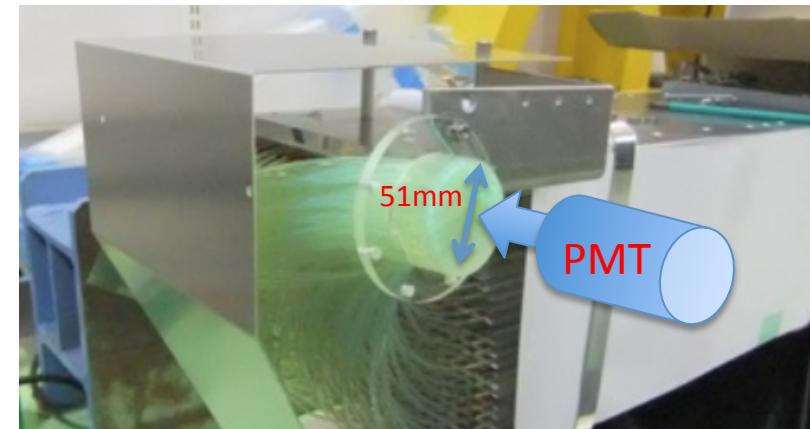


Cosmic Ray Test

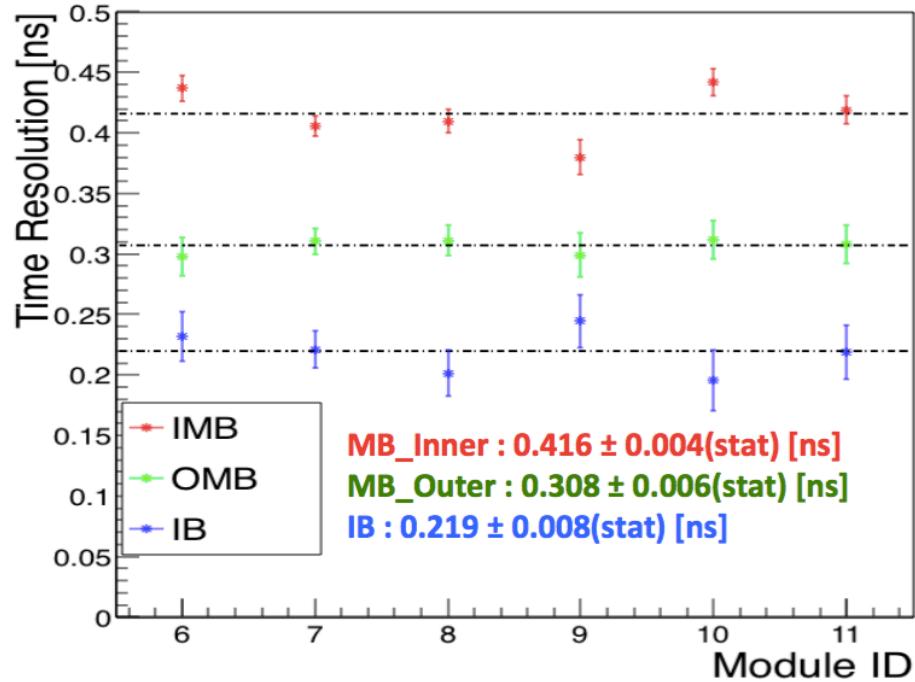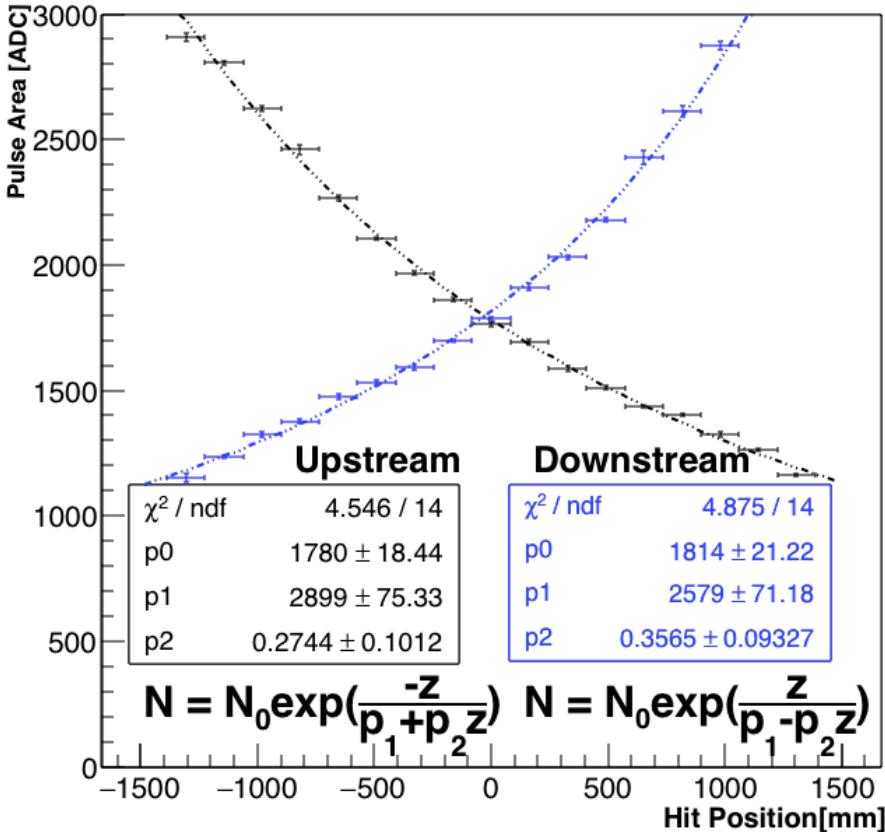

- Attenuation curves fitted by two terms.
 - Correction of attenuation effect.
- Superior timing resolution of IB obtained by cosmic-ray.

$K_L \rightarrow \pi^0 \pi^0 \pi^0$ Reconstruction Using 5 γ on CsI and 1 γ on Barrel

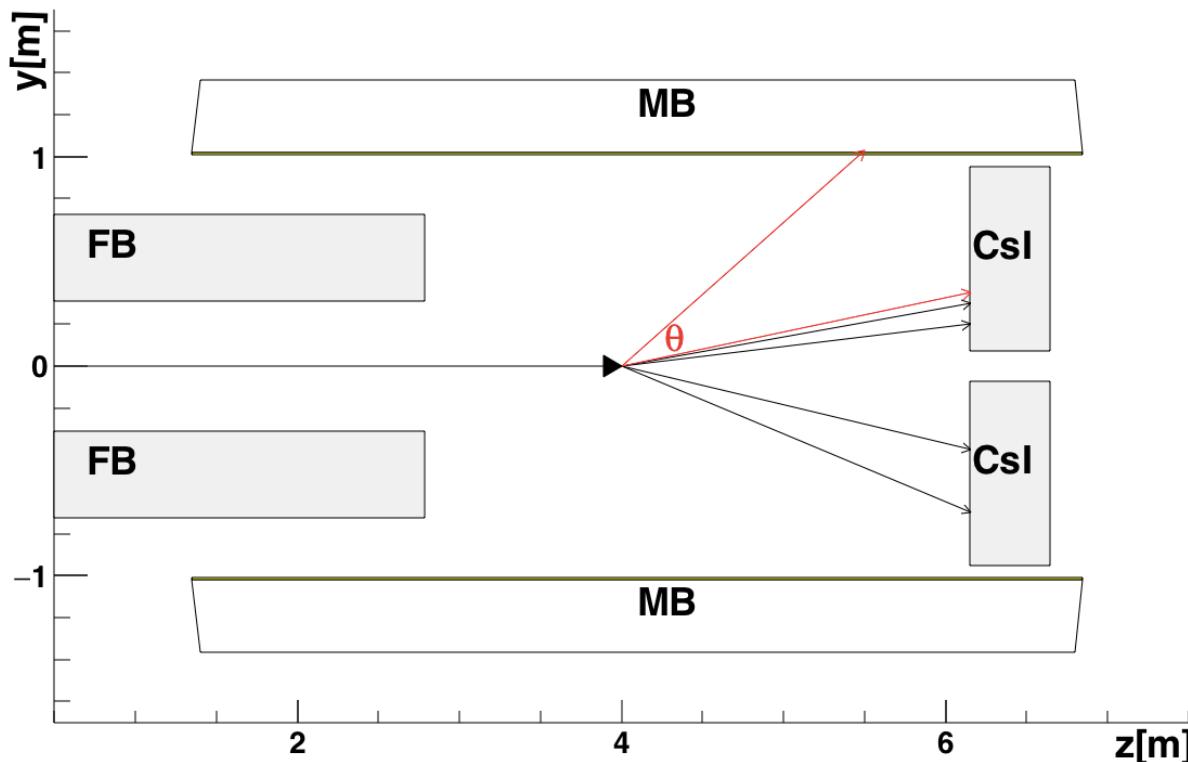


$$E_6 = \frac{M_\pi^2}{2E_5(1-\cos\theta)}$$





$$M_{K_L}^2 = \left(\sum_{i=1}^6 E_i\right)^2 - \left(\sum_{i=1}^6 \vec{p}_i\right)^2$$

- $K_L \rightarrow \pi^0 \pi^0 \pi^0$ decay samples with 5 γ s on CsI and 1 γ on Barrel
- Reconstruction of $2\pi^0$ from 4 γ s on CsI
- 1 γ Reconstruction from hit information of Barrel (timing and Module ID)
- Reconstruction of the third π^0 from 1 γ on CsI and 1 γ on Barrel

Reconstruction of Vertex X, Y


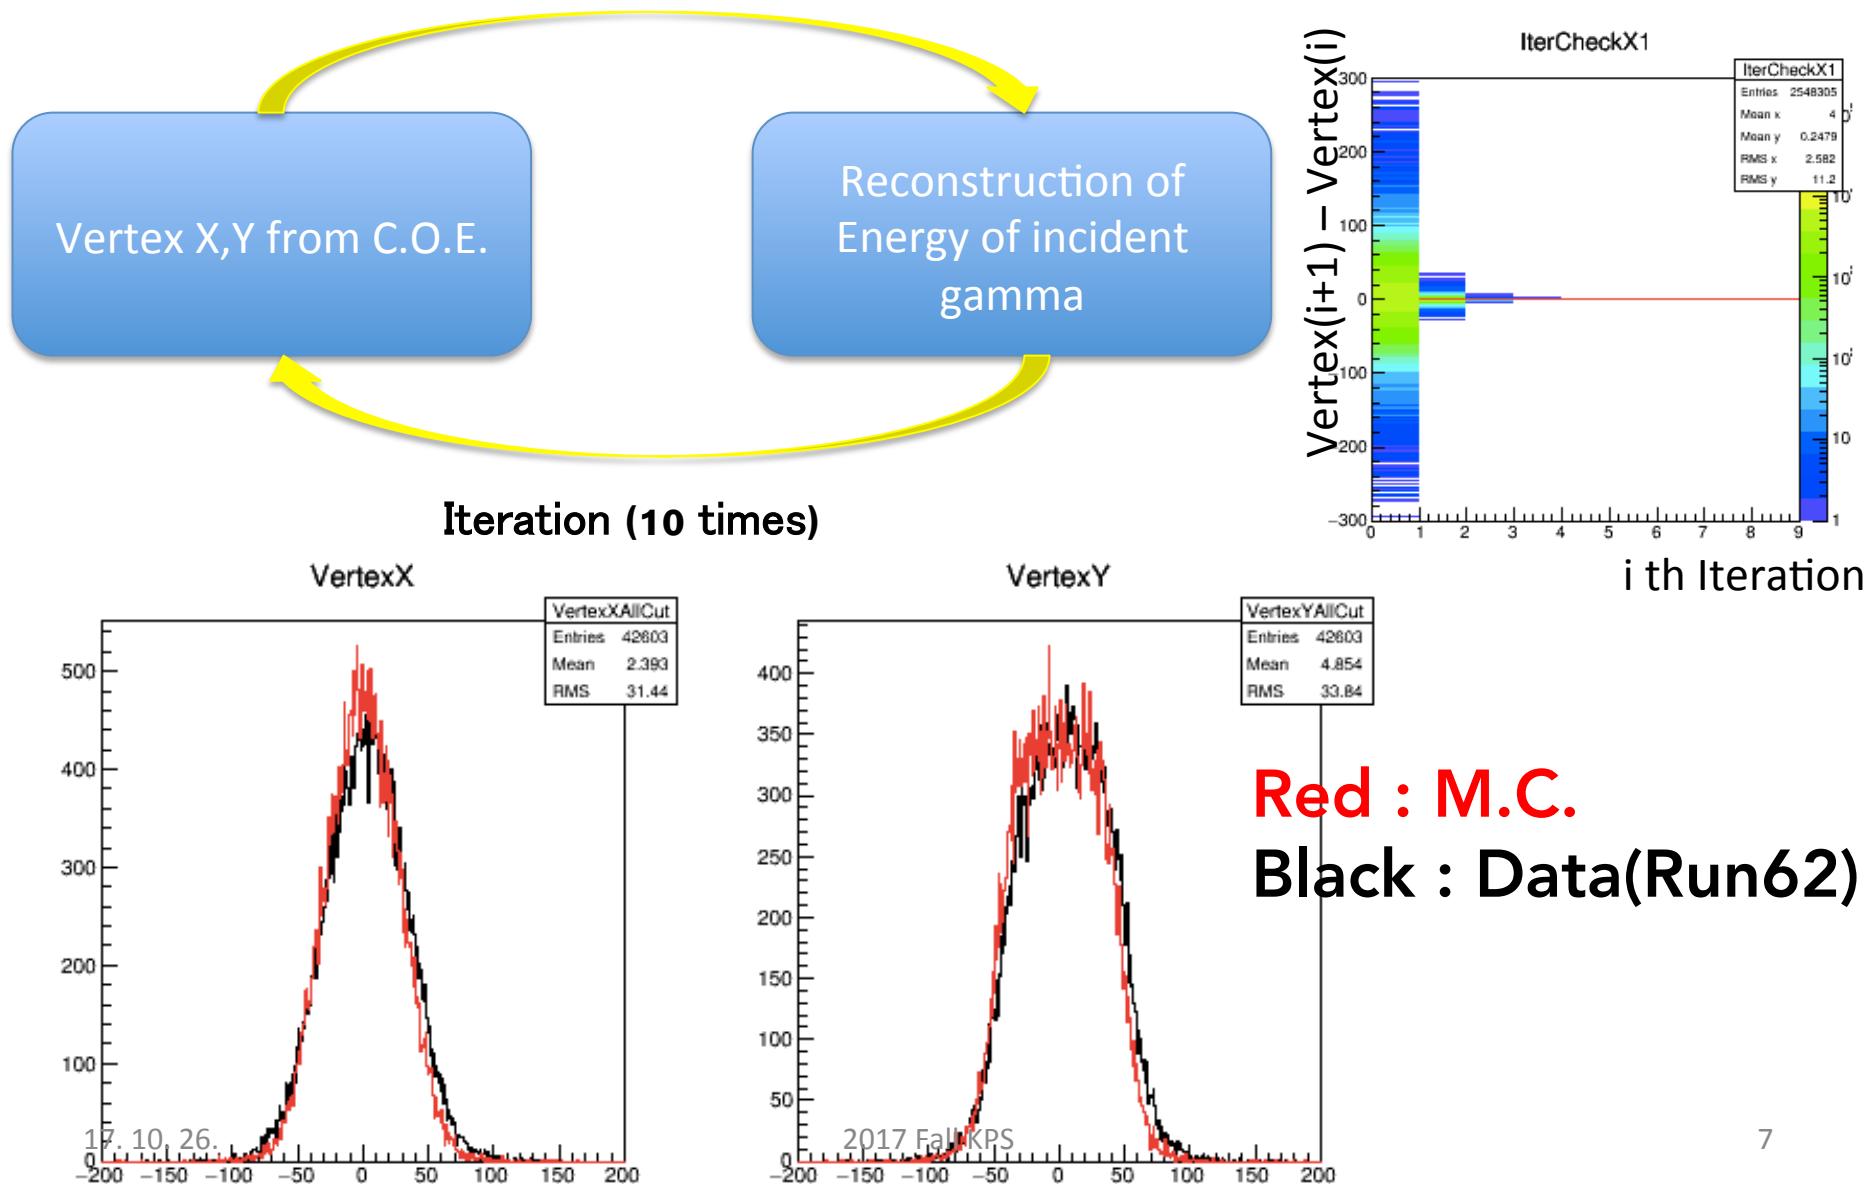


Reconstruction Quality

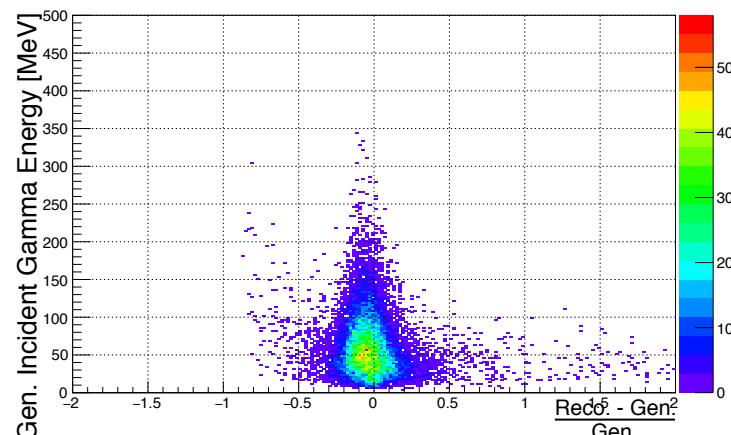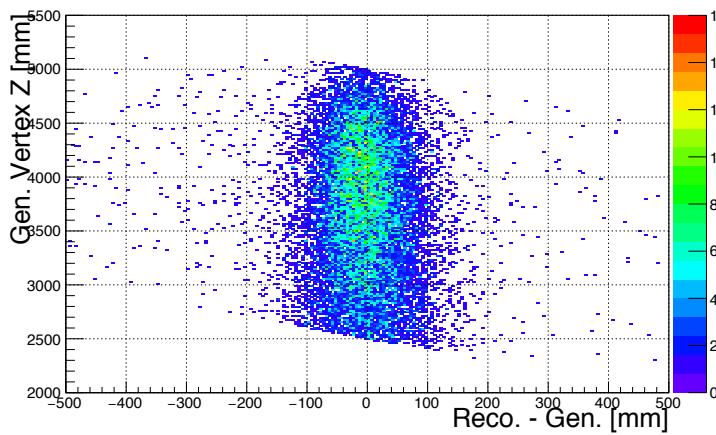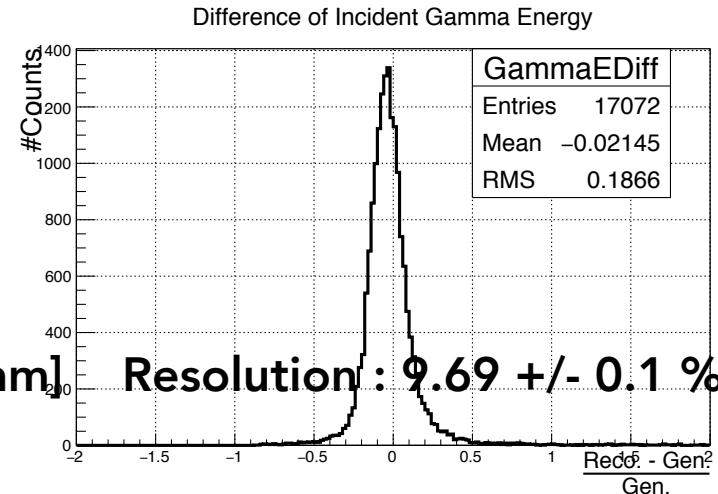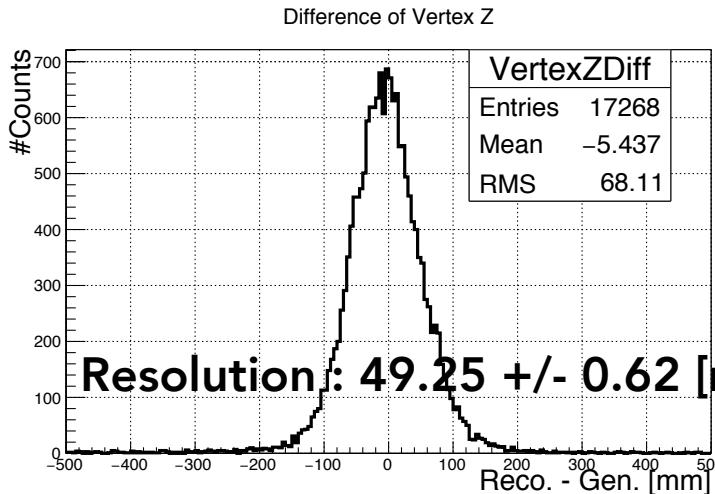

$K_L \rightarrow \pi^0 \pi^0 \pi^0$ Monte Carlo Generation

Response Comparison

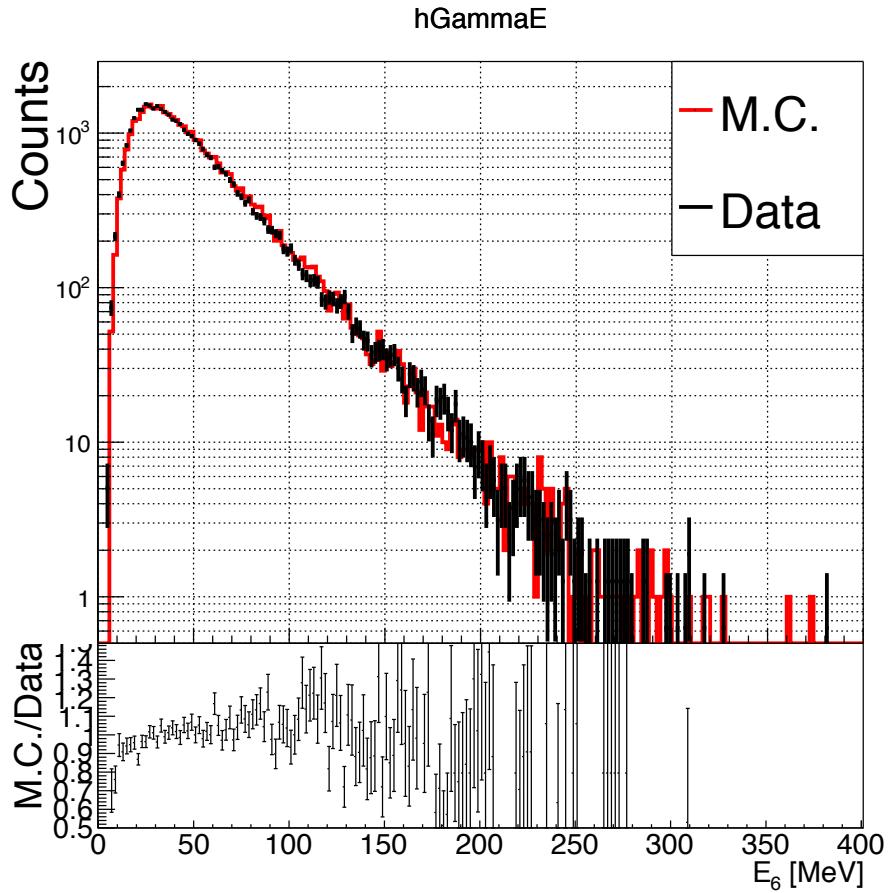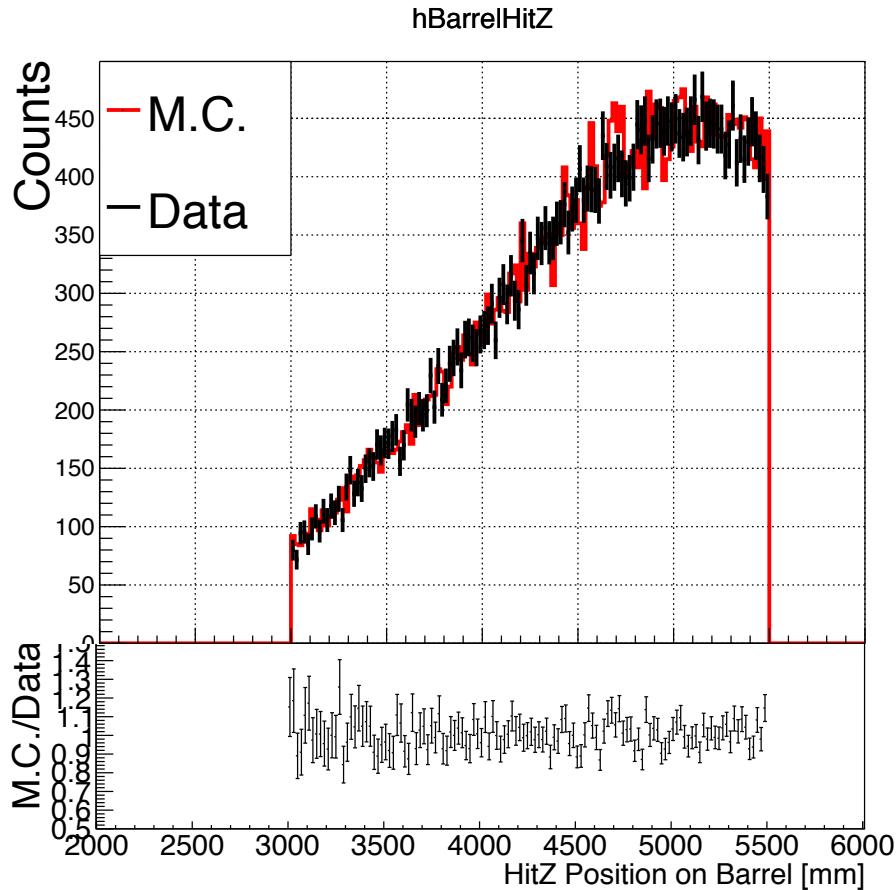

- Good agreement between M.C. and Data

Reconstruction Results

Background	Probability
Dalitz Decay of pion	5.25×10^{-6}
Ineff. of other Det.	1.87×10^{-3}
Fusion	5.25×10^{-6}




Detector	Probability
CsI	1.04×10^{-3}
FB	5.70×10^{-4}
Beam Pipe	8.14×10^{-5}
BHPV	1.71×10^{-4}



- Mis-reconstruction due to inefficiency of other detectors.
- Gamma selection with 99.8% accuracy.

Vertex Time Difference

K_L Vertex Time

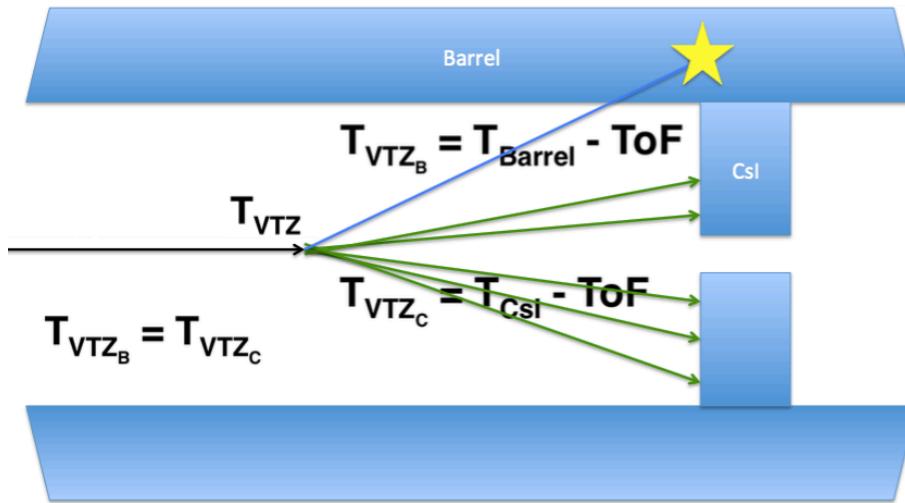


Distributions of Vertex Time Difference

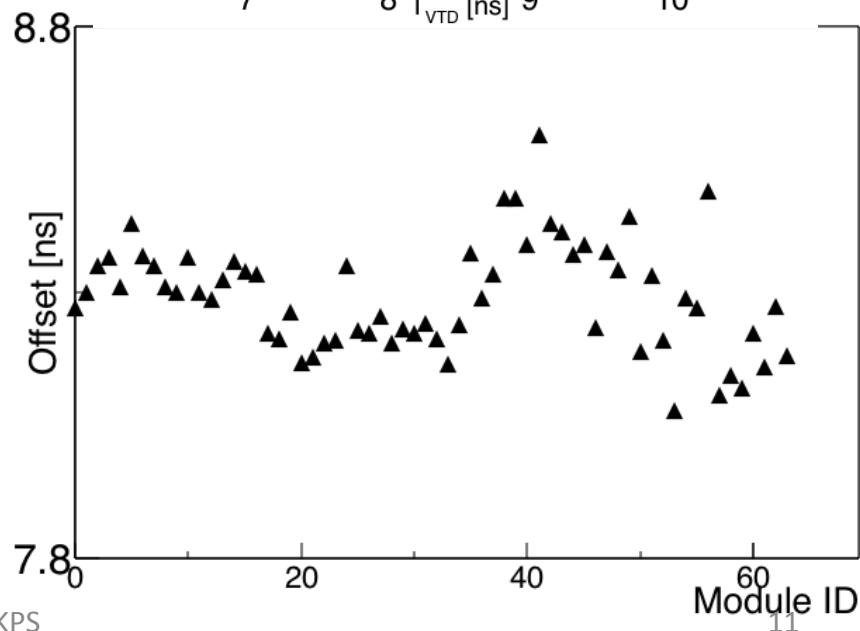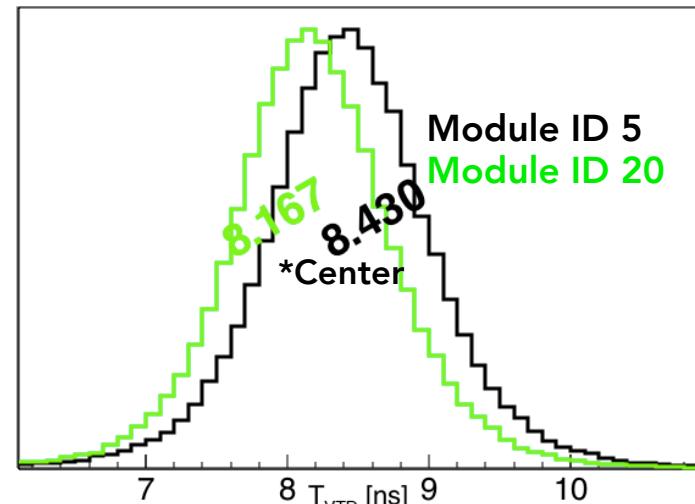


- Vertex Time Reconstruction with
 - Barrel
 - CsI Calorimeter
- Vertex Time Difference
 - Invariant

Timing Resolution from K_L signal


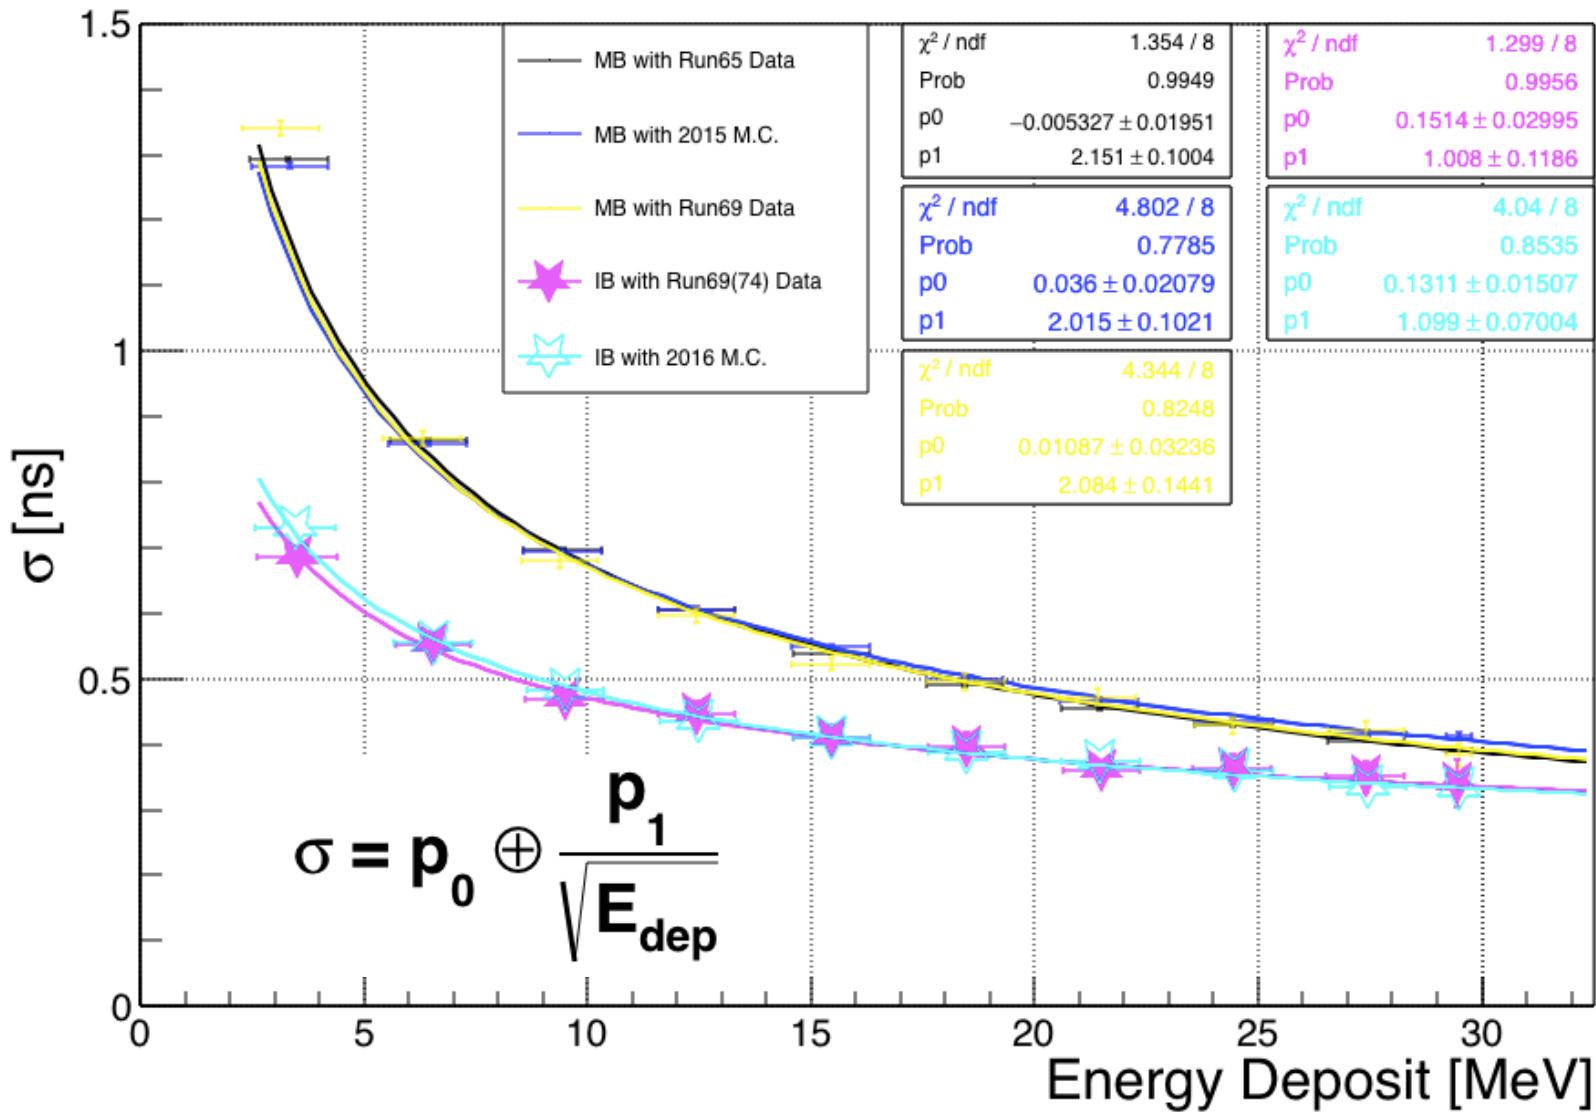


Sampling Fraction

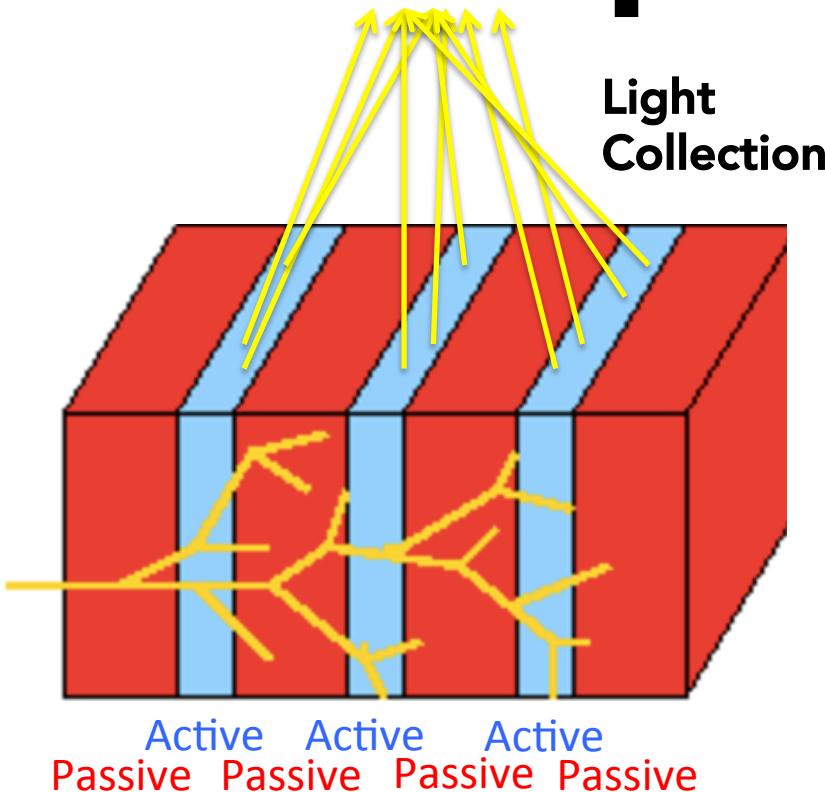


Active Active Active
Passive Passive Passive

- **Sampling Calorimeter collects signal only from Active**
 - Plastic scintillator
- **Passive induces interaction with high Z number**
 - Lead plate

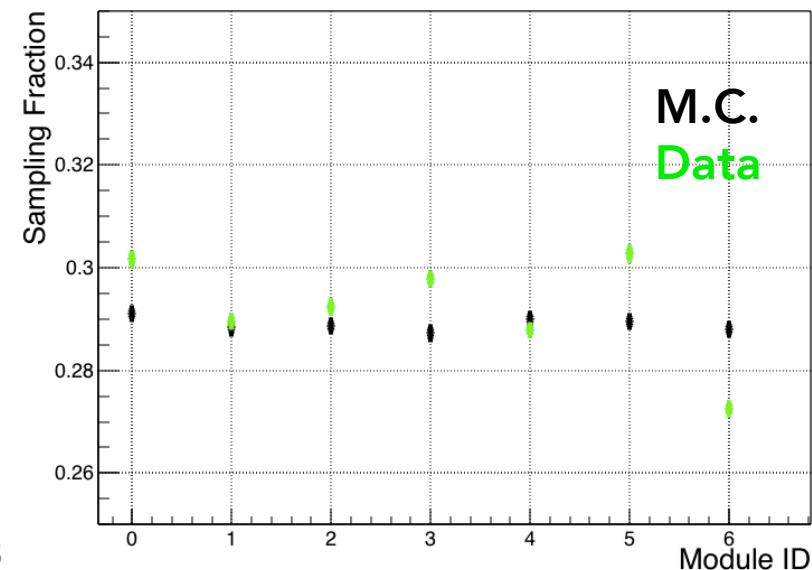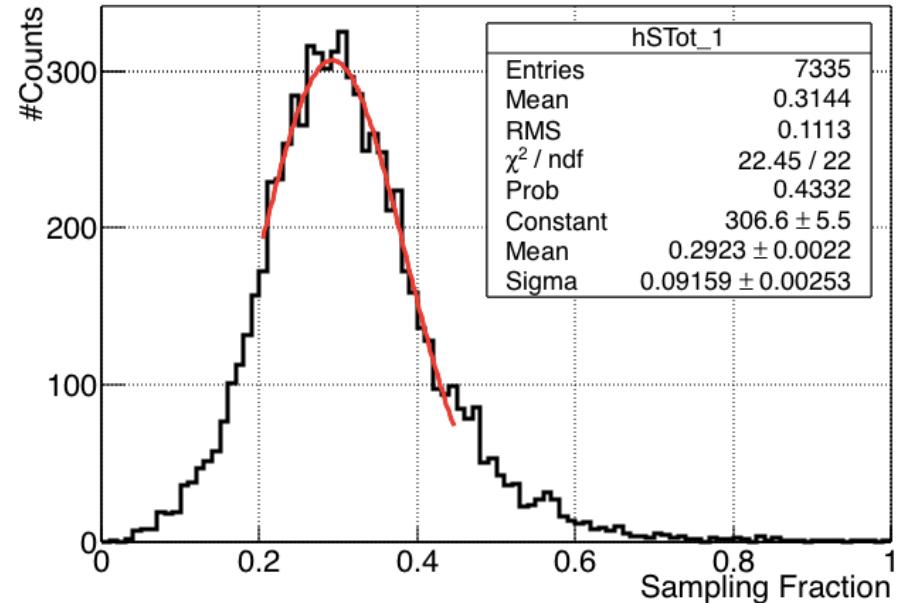

Data/M.C. @ Low S.F.

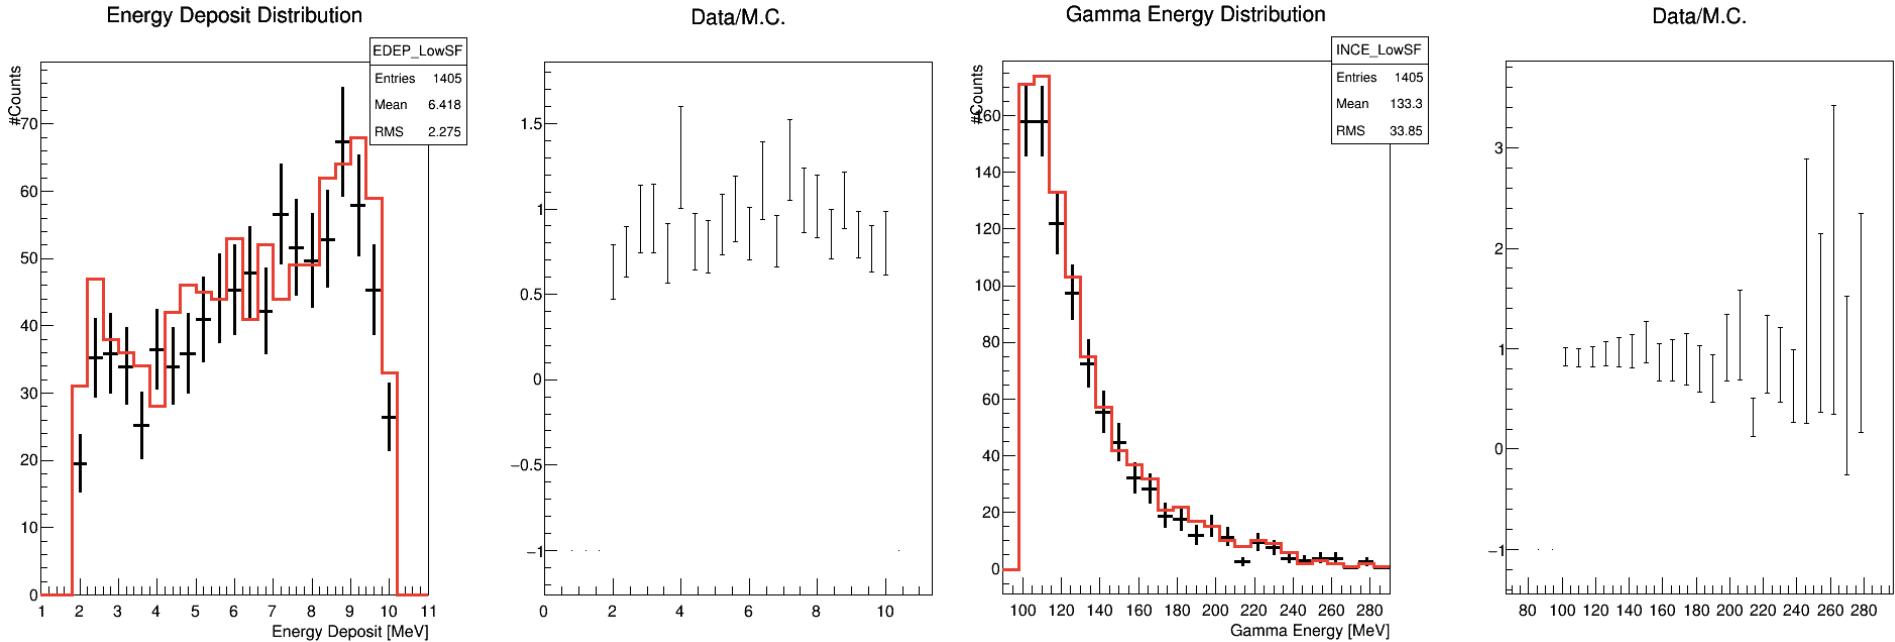

- **Low sampling event selection**
 - Gamma Energy > 100 MeV & Deposited Energy < 10 MeV
- Even if in extreme region, agreement between M.C. and Data is shown.

Summary

- Additional sampling calorimeter to improve background rejection.
 - Installed on April. 2016.
 - $5X_0$ more and better timing resolution
- Calibration method for the sampling calorimeter was developed from $K_L \rightarrow \pi^0 \pi^0 \pi^0$ reconstruction.
 - Gamma selection entering sampling calorimeter with 99.8% accuracy.
 - Good performance to align origin of timing of individual modules
 - Timing resolution as a function of deposited energy
 - Detailed study of detector response and good agreement between M.C. and data.